

# MPA 3200 E3 LCD




Supply units in the compact sound- and heat-insulated casing with water or electric heater

- Power of electrical reheater: 25200
- Maximum airflow: 3200
- Sound pressure level LpA at 3 m: 53
- Filter: G4
- Sound insulation
- Motor type: AC
- Reheater: Electric
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	MPA 3200 E3 LCD
Connected air duct size	mm	600x300
Speed	-	1
Connection type	-	Y
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	1270
Power of electrical reheater	W	25200
Unit current	A	38.7
Maximum airflow	m <sup>3</sup> /h	3200
Sound pressure level LpA at 3 m	dB(A)	53
Weight	kg	69.4
Filter	-	G4
Transported air temperature (max)	°C	45
Transported air temperature (min)	°C	-40
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44


## Dimensions

B	B1	B2	B3	H	H1	H2	L	L1	L2
600	620	759	710	300	320	530	1000	880	440

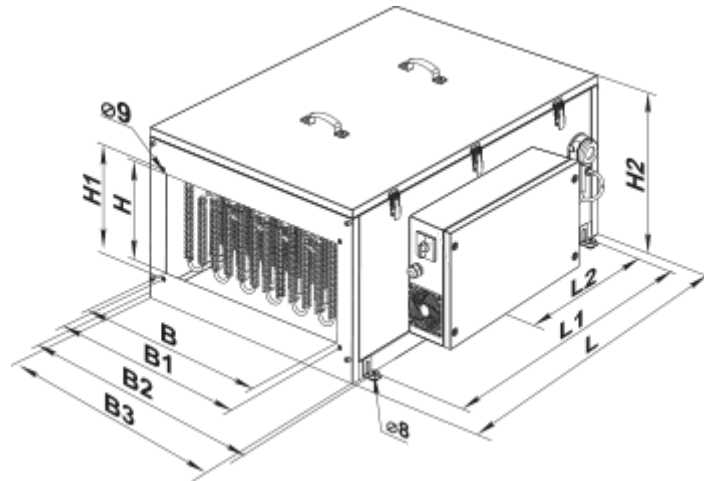

## Accessories


### For rectangular ducts

Name	Photo	Description
<a href="#">SR 600x300</a>		The plate silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems

### Airflow regulators

Name	Photo	Description
<a href="#">RRV 600x300</a>		Air flow controllers

### Mixing chambers


Name	Photo	Description
<a href="#">SKRA 600x300/24</a>		The mixing chambers is designed for mixing (recirculation) of extract and intake air in a required ratio

### For rectangular ducts


Name	Photo	Description
------	-------	-------------

<a href="#">VVG 600x300</a>		Flexible anti-vibration connector
-----------------------------	---	-----------------------------------

### Water coolers

Name	Photo	Description
<a href="#">OKW 600x300-3</a>		Duct water coil air coolers are designed for cooling of supply air in rectangular ventilation systems and can be applied in supply or supply and exhaust ventilation systems

### Freon coolers

Name	Photo	Description
<a href="#">OKF 600x300-3</a>		Direct-expansion duct coolers are designed for cooling of supply air in rectangular ventilation systems and can be used either for supply or supply and exhaust units

### Other accessories

Name	Photo	Description
SF 653x440x47 G4		Panel filter G4