

MPA 3500 E3 LCD




Supply units in the compact sound- and heat-insulated casing with water or electric heater

- Power of electrical reheater: 25200
- Maximum airflow: 3500
- Sound pressure level LpA at 3 m: 53
- Filter: G4
- Sound insulation
- Motor type: AC
- Reheater: Electric
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	MPA 3500 E3 LCD
Connected air duct size	mm	600x350
Speed	-	1
Connection type	-	Y
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	1270
Power of electrical reheater	W	25200
Unit current	A	38.7
Maximum airflow	m ³ /h	3500
Sound pressure level LpA at 3 m	dB(A)	53
Weight	kg	69.3
Filter	-	G4
Transported air temperature (max)	°C	45
Transported air temperature (min)	°C	-40
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

Dimensions

B	B1	B2	B3	H	H1	H2	L	L1	L2
600	620	759	710	350	370	530	1000	880	440

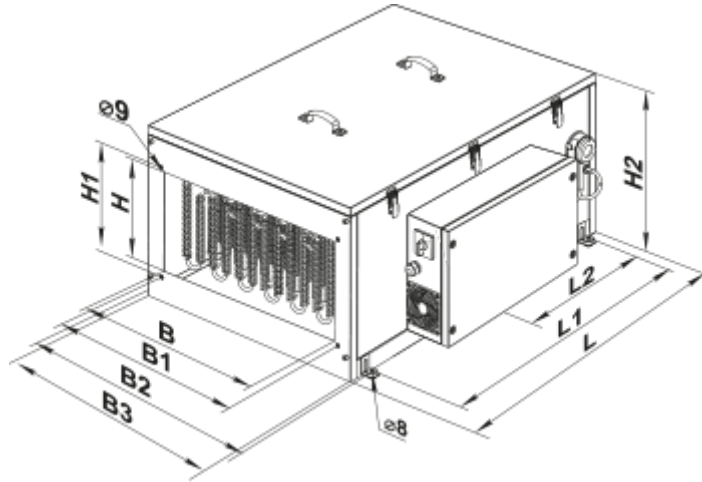

Accessories


For rectangular ducts

Name	Photo	Description
SR 600x350		Plate silencer for installation in rectangular ducts

Airflow regulators


Name	Photo	Description
RRV 600x350		Air flow controllers

Mixing chambers

Name	Photo	Description
SKRA 600x350/24		Mixing chambers for mixing (recirculating) part of the exhaust air with the outdoor air in the appropriate proportion

For rectangular ducts


Name	Photo	Description
------	-------	-------------

VVG 600x350		Flexible anti-vibration inserts for round air ducts
-----------------------------	---	---

Water coolers

Name	Photo	Description
OKW 600x350-3		Rectangular inline water coolers

Freon coolers

Name	Photo	Description
OKF 600x350-3		Rectangular inline direct evaporative coolers

Other accessories

Name	Photo	Description
SF 653x440x47 G4		Panel filter G4