

MPA 3500 W LCD



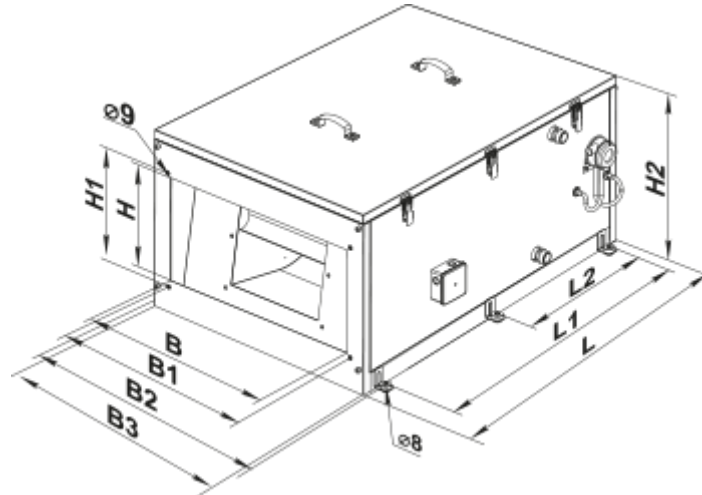
Supply units in the compact sound- and heat-insulated casing with water or electric heater

- Maximum airflow: 3250
- Sound pressure level LpA at 3 m: 53
- Filter: G4
- Sound insulation
- Motor type: AC
- Reheater: Water
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	MPA 3500 W LCD
Connected air duct size	mm	600x350
Speed	-	1
Connection type	-	Y
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	1270
Unit current	A	2.3
Maximum airflow	m ³ /h	3250
Sound pressure level LpA at 3 m	dB(A)	53
Weight	kg	73.1
Filter	-	G4
Transported air temperature (max)	°C	45
Transported air temperature (min)	°C	-40
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44



Dimensions

B	B1	B2	B3	H	H1	H2	L	L1	L2
600	620	759	710	350	370	530	1000	880	440




Accessories


Mixing chambers

Name	Photo	Description
USWK 3/4-4		The mixing unit USWK is designed for smooth heat medium flow control in ventilation systems equipped with water heaters or coolers for supply air temperature regulation
USWK 3/4-6		The mixing unit USWK is designed for smooth heat medium flow control in ventilation systems equipped with water heaters or coolers for supply air temperature regulation

For rectangular ducts


Name	Photo	Description
SR 600x350		The plate silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems

Airflow regulators

Name	Photo	Description
RRV 600x350		Air flow controllers

Mixing chambers


Name	Photo	Description
------	-------	-------------

SKRA 600x350/24		The mixing chambers is designed for mixing (recirculation) of extract and intake air in a required ratio
---------------------------------	---	--


For rectangular ducts

Name	Photo	Description
VVG 600x350		Flexible anti-vibration connector

Water coolers

Name	Photo	Description
OKW 600x350-3		Duct water coil air coolers are designed for cooling of supply air in rectangular ventilation systems and can be applied in supply or supply and exhaust ventilation systems

Freon coolers

Name	Photo	Description
OKF 600x350-3		Direct-expansion duct coolers are designed for cooling of supply air in rectangular ventilation systems and can be used either for supply or supply and exhaust units

Other accessories

Name	Photo	Description
SF 653x440x47 G4		Panel filter G4