# NK 160-3,4-1




Round electric inline heaters with round cross-section

• Casing material: Galvanized steel

| | Unit of measurement | NK 160-3,4-1 |
|---|---|---|
| Connected air duct size | mm | 160 |
| Phases | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 3400 |
| Weight | kg | 2.5 |

## Dimensions

| ØD | B | H | L | L1 | L2 |
|---|---|---|---|---|---|
| 159 | 120 | 267 | 306 | 226 | 40 |

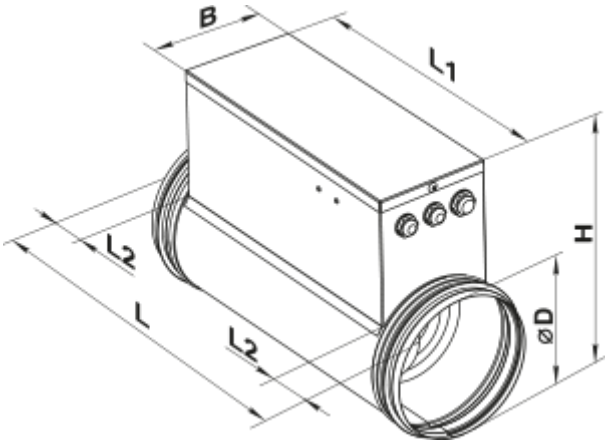


## Accessories

### Outdoor temperature sensors

| Name | Photo | Description |
|---|---|---|
| KDT2-M 100 |  | Duct temperature sensors |
| KDT2-M 150 |  | Duct temperature sensors |
| KDT2-M 200 |  | Duct temperature sensors |
| KDT2-M 400 |  | Duct temperature sensors |
| KDT2-M1 100 |  | Duct temperature sensors |
| KDT2-M1 150 |  | Duct temperature sensors |
| KDT2-M1 200 |  | Duct temperature sensors |
| KDT2-M1 400 |  | Duct temperature sensors |
| KDT2-MK 100 |  | Duct temperature sensors with a terminal box |
| KDT2-MK 150 |  | Duct temperature sensors with a terminal box |

| | | |
|---|---|---|
| KDT2-MK 200 |  | Duct temperature sensors with a terminal box |
| KDT2-MK 400 |  | Duct temperature sensors with a terminal box |

### Electric triac temperature controllers

| Name | Photo | Description |
|---|---|---|
| PULSER-M |  | Electric triac temperature controllers for single and two-phase electric heaters |