



## OV 4E 500



Low pressure axial fans in the steel casing for wall mounting

- Maximum airflow: 7060
- Sound pressure level LpA at 3 m: 58
- Motor type: AC
- Impeller type: Axial
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	OV 4E 500
Connected air duct size	mm	500
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	420
Unit current	A	1.95
Maximum airflow	m <sup>3</sup> /h	7060
Sound pressure level LpA at 3 m	dB(A)	58
Weight	kg	14
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-30
Ingress protection rating	-	IP24

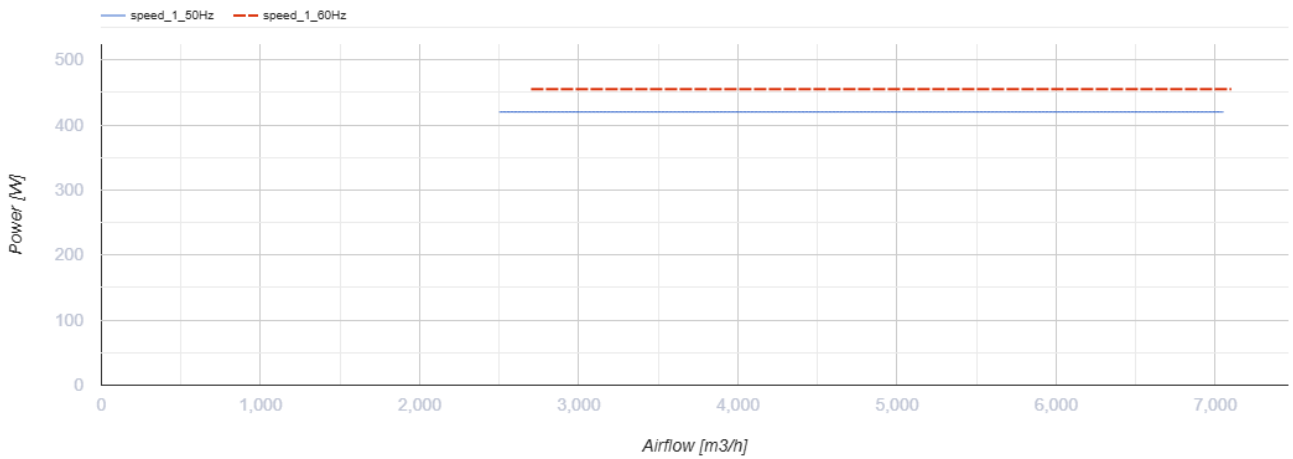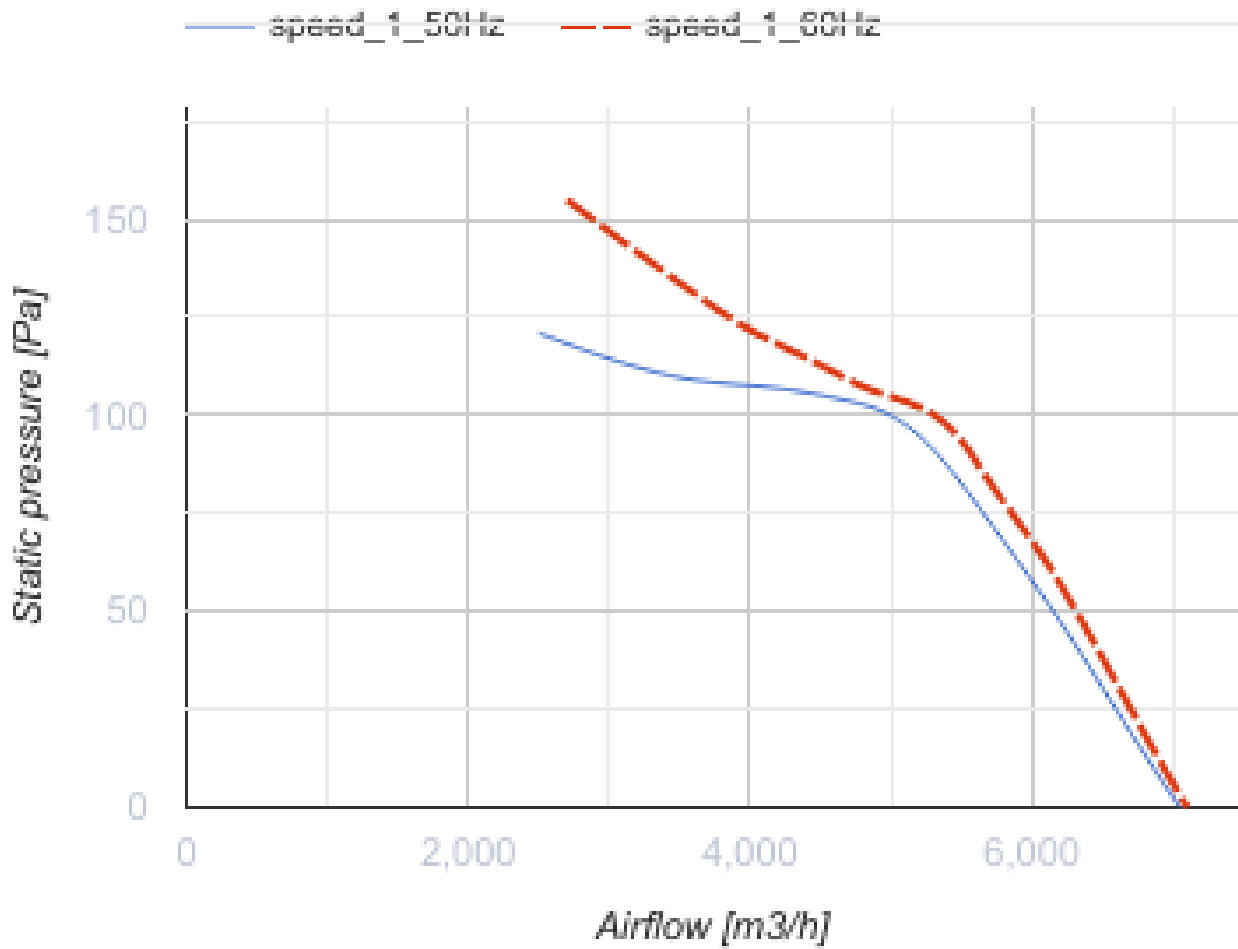

## Dimensions

∅D	∅d	B	B1	L
520	11	655	615	250



## Ecodesign

Trademark	Vents
Model	OV 4E 500
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal flow rate (m <sup>3</sup> /s)	1.385
Nominal external pressure (Pa)	100
Maximum external leakage rates (%)	2.7
Static efficiency (%)	32.1
Declared typology	NRVU UVU
Effective electric power input (kW)	0.44
Sound power level (dB(A))	89