

OVK 2E 200




Low pressure axial fans in the steel casing for wall mounting

- Maximum airflow: 860
- Sound pressure level LpA at 3 m: 48
- Motor type: AC
- Impeller type: Axial
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	OVK 2E 200
Connected air duct size	mm	200
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	55
Unit current	A	0.26
Maximum airflow	m ³ /h	860
Sound pressure level LpA at 3 m	dB(A)	48
Weight	kg	2.8
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-30
Ingress protection rating	-	IP24

Dimensions

$\varnothing D$	$\varnothing D1$	$\varnothing D2$	$\varnothing d$	L
210	250	280	7	125

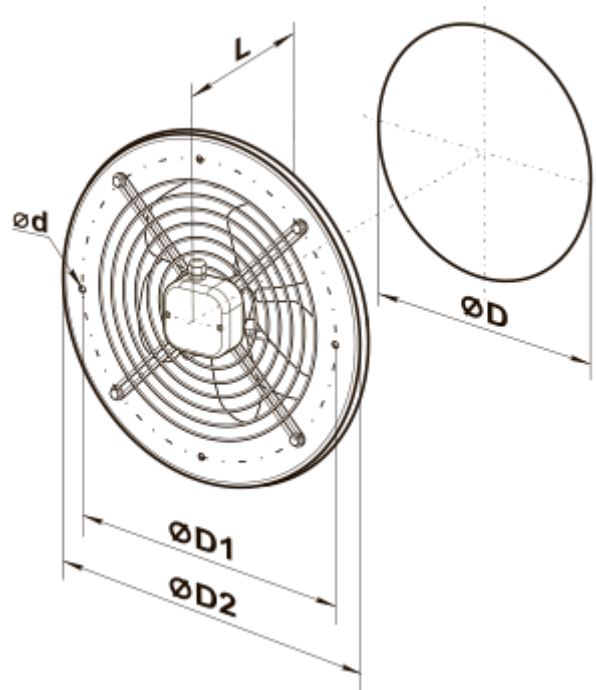

Ecodesign

Trademark	Vents
Model	OVK 2E 200
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal flow rate (m ³ /s)	0.075
Nominal external pressure (Pa)	65
Maximum external leakage rates (%)	2.7
Static efficiency (%)	8.3
Declared typology	NRVU UVU
Effective electric power input (kW)	0.06
Sound power level (dB(A))	70