



# OVK 4E 250



Low pressure axial fans in the steel casing for wall mounting

- Maximum airflow: 800
- Sound pressure level LpA at 3 m: 38
- Motor type: AC
- Impeller type: Axial
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	OVK 4E 250
Connected air duct size	mm	250
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	50
Unit current	A	0.22
Maximum airflow	m <sup>3</sup> /h	800
Sound pressure level LpA at 3 m	dB(A)	38
Weight	kg	3.4
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-30
Ingress protection rating	-	IP24

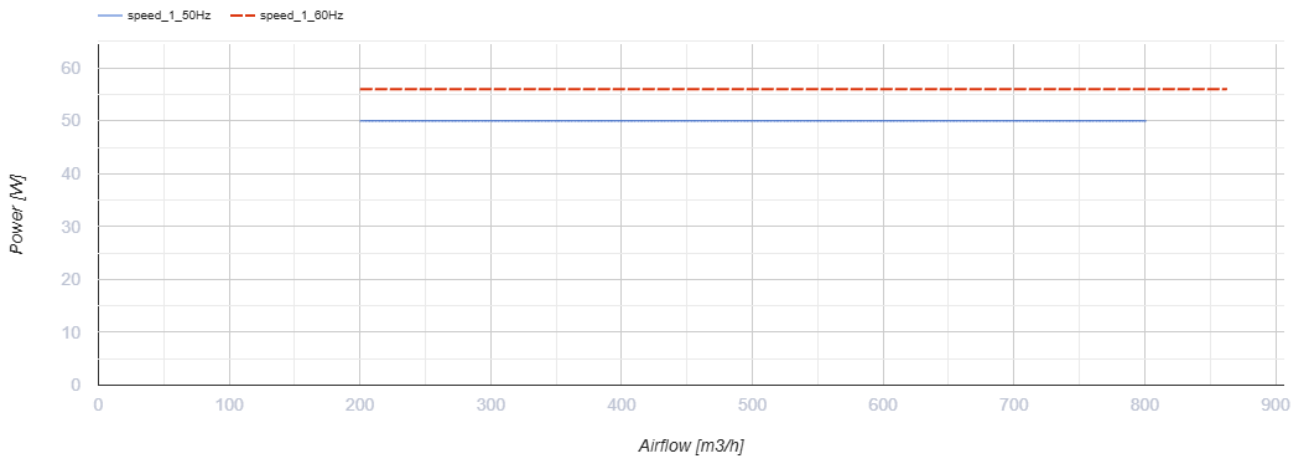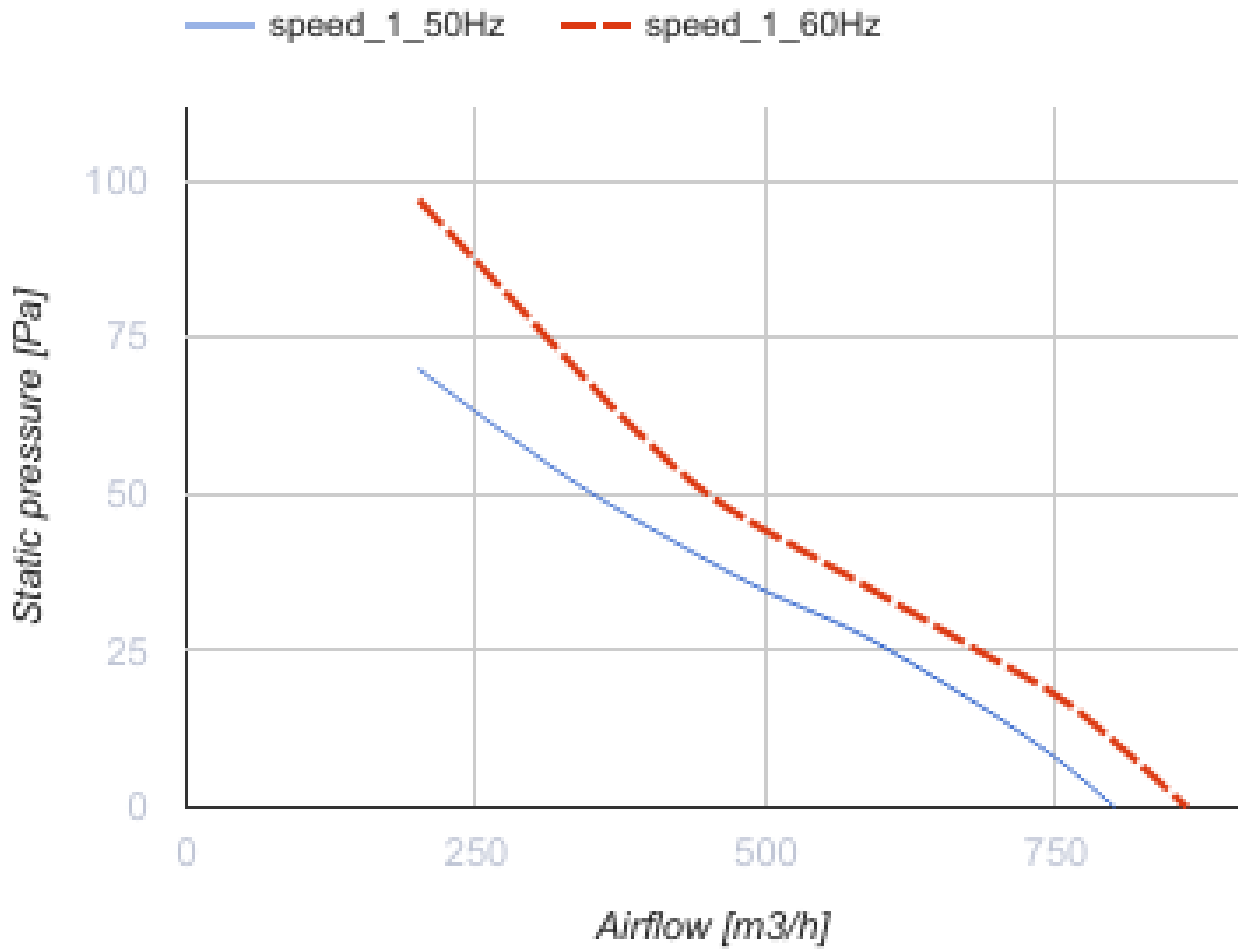

## Dimensions

∅D	∅D1	∅D2	∅d	L
260	318	340	7	135



## Ecodesign

Trademark	Vents
Model	OVK 4E 250
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal flow rate (m <sup>3</sup> /s)	0.085
Nominal external pressure (Pa)	55
Maximum external leakage rates (%)	2.7
Static efficiency (%)	8.7
Declared typology	NRVU UVU
Effective electric power input (kW)	0.055
Sound power level (dB(A))	75