



# OVK1 200



Low pressure axial fans in the steel casing for wall mounting

- Maximum airflow: 405
- Sound pressure level LpA at 3 m: 33
- Motor type: AC
- Impeller type: Axial
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	OVK1 200
Connected air duct size	mm	200
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	43
Unit current	A	0.28
Maximum airflow	m <sup>3</sup> /h	405
Sound pressure level LpA at 3 m	dB(A)	33
Weight	kg	2.5
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-30
Ingress protection rating	-	IP24
Ingress protection rating of the drive	-	IP44

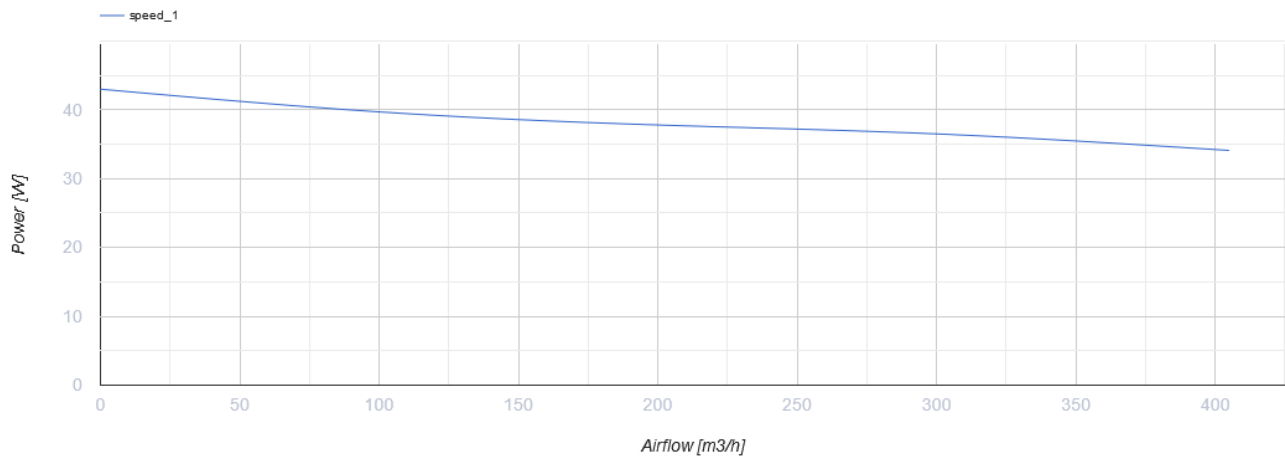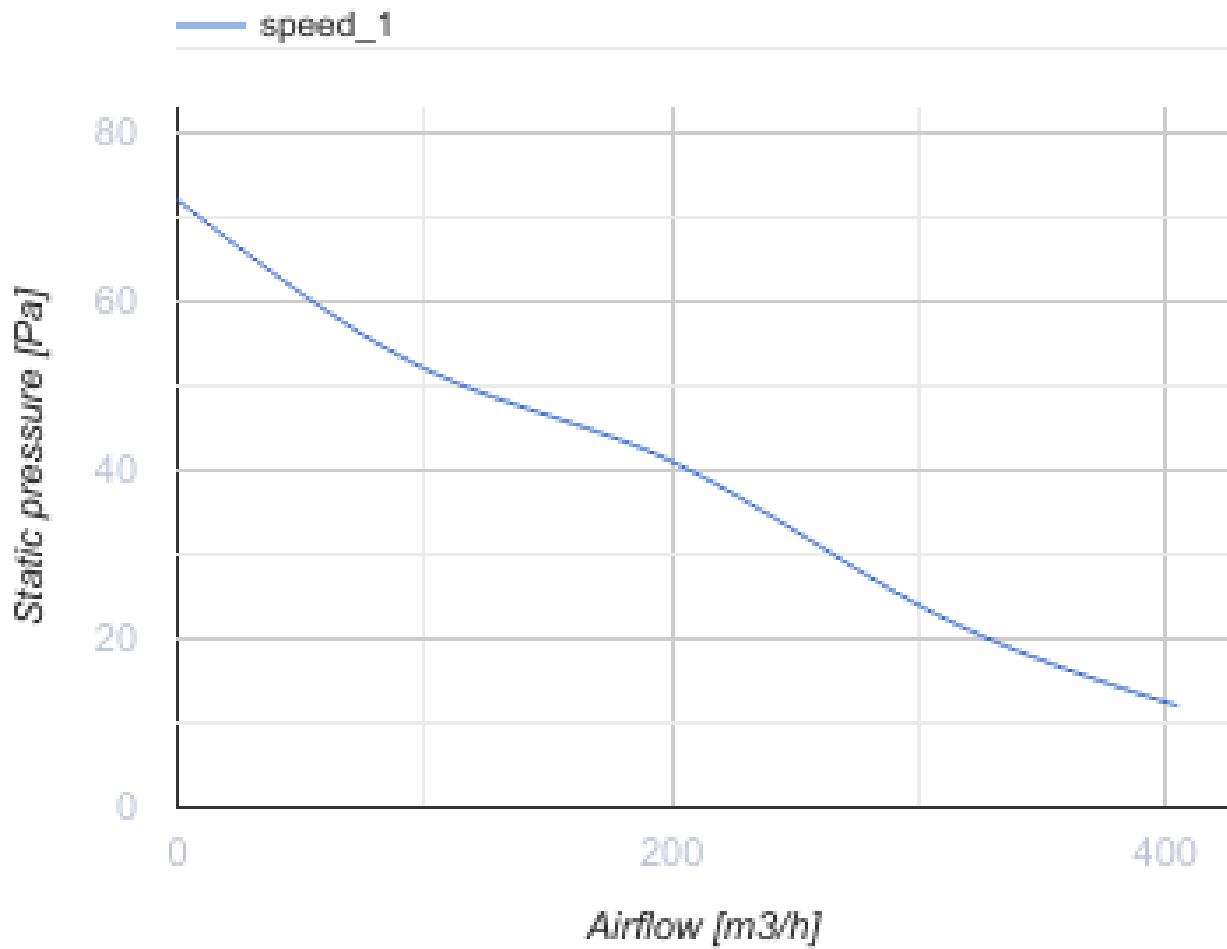

## Dimensions

ØD	ØD1	ØD2	Ød	L
208	270	300	7	120



## Ecodesign

Trademark	Vents
Model	OVK1 200
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal flow rate (m <sup>3</sup> /s)	0.055
Nominal external pressure (Pa)	42
Maximum external leakage rates (%)	2.7
Static efficiency (%)	8.6
Declared typology	NRVU UVU
Effective electric power input (kW)	0.027
Sound power level (dB(A))	52