

PA 01 W2 LCD




Suspended air supply units in the sound- and heat-insulated casing with the water or electric heater

- Maximum airflow: 1200
- Sound pressure level LpA at 3 m: 51
- Filter: G4 (F7 option)
- Sound insulation
- Motor type: AC
- Reheater: Water
- Control: Remote Control
- Casing material: Galvanized steel

| | Unit of measurement | PA 01 W2 LCD |
|--|---------------------|----------------|
| Connected air duct size | mm | 400x200 |
| Speed | - | 1 |
| Minimum supply voltage | V | 400 |
| Maximum supply voltage | V | 400 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 320 |
| Unit current | A | 0.55 |
| Maximum airflow | m ³ /h | 1200 |
| Sound pressure level LpA at 3 m | dB(A) | 51 |
| Weight | kg | 55 |
| Filter | - | G4 (F7 option) |
| Transported air temperature (max) | °C | 55 |
| Transported air temperature (min) | °C | -25 |
| Ambient air temperature min | °C | -25 |
| Ambient air temperature max | °C | 55 |
| Ambient air humidity max | % | 80 |
| Ingress protection rating | - | IP22 |
| Ingress protection rating of the drive | - | IP44 |

Dimensions

| B | B1 | B2 | B3 | H | H1 | H2 | L | L1 |
|-----|-----|-----|-----|-----|-----|-----|------|------|
| 400 | 420 | 624 | 582 | 200 | 220 | 374 | 1145 | 1106 |

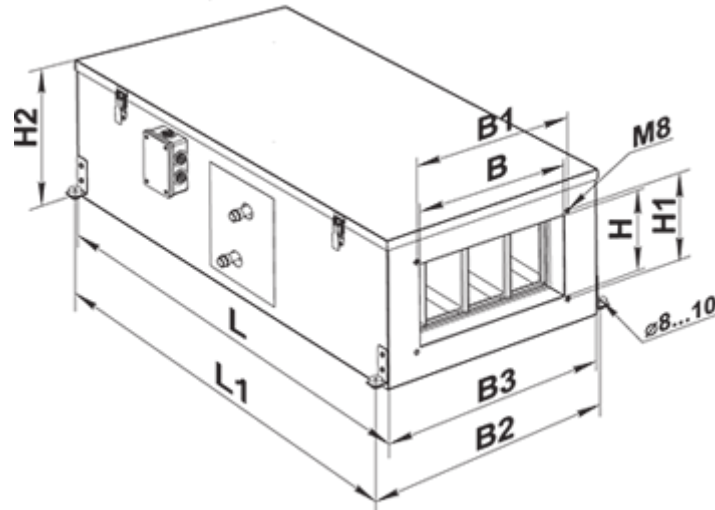



Accessories


For rectangular ducts

| Name | Photo | Description |
|----------------------------|---|--|
| SR 400x200 |  | Plate silencer for installation in rectangular ducts |

Mixing chambers

| Name | Photo | Description |
|----------------------------|---|--|
| USWK 3/4-4 |  | The mixing unit USWK is designed for smooth heat medium flow control in ventilation systems equipped with water heaters or coolers for supply air temperature regulation |
| USWK 3/4-6 |  | The mixing unit USWK is designed for smooth heat medium flow control in ventilation systems equipped with water heaters or coolers for supply air temperature regulation |

Water coolers


| Name | Photo | Description |
|-------------------------------|---|----------------------------------|
| OKW 400x200-3 |  | Rectangular inline water coolers |

Airflow regulators


| Name | Photo | Description |
|------|-------|-------------|
|------|-------|-------------|

| | | |
|-----------------------------|---|----------------------|
| RRV 400x200 |  | Air flow controllers |
|-----------------------------|---|----------------------|


Mixing chambers

| Name | Photo | Description |
|---------------------------------|---|---|
| SKRA 400x200/24 |  | Mixing chambers for mixing (recirculating) part of the exhaust air with the outdoor air in the appropriate proportion |



For rectangular ducts

| Name | Photo | Description |
|-----------------------------|---|---|
| VVG 400x200 |  | Flexible anti-vibration inserts for round air ducts |

Freon coolers

| Name | Photo | Description |
|-------------------------------|--|---|
| OKF 400x200-3 |  | Rectangular inline direct evaporative coolers |

Other accessories

| Name | Photo | Description |
|-------------------|---|------------------|
| SFK 474x269x27 G4 |  | G4 pocket filter |
| SFK 474x269x27 F7 |  | F7 pocket filter |