

PA 01 W4 LCD




Suspended air supply units in the sound- and heat-insulated casing with the water or electric heater

- Maximum airflow: 1200
- Sound pressure level LpA at 3 m: 51
- Filter: G4 (F7 option)
- Sound insulation
- Motor type: AC
- Reheater: Water
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	PA 01 W4 LCD
Connected air duct size	mm	400x200
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	320
Unit current	A	0.55
Maximum airflow	m ³ /h	1200
Sound pressure level LpA at 3 m	dB(A)	51
Weight	kg	57
Filter	-	G4 (F7 option)
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	-25
Ambient air temperature max	°C	55
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44


Dimensions

B	B1	B2	B3	H	H1	H2	L	L1
400	420	624	582	200	220	374	1145	1106

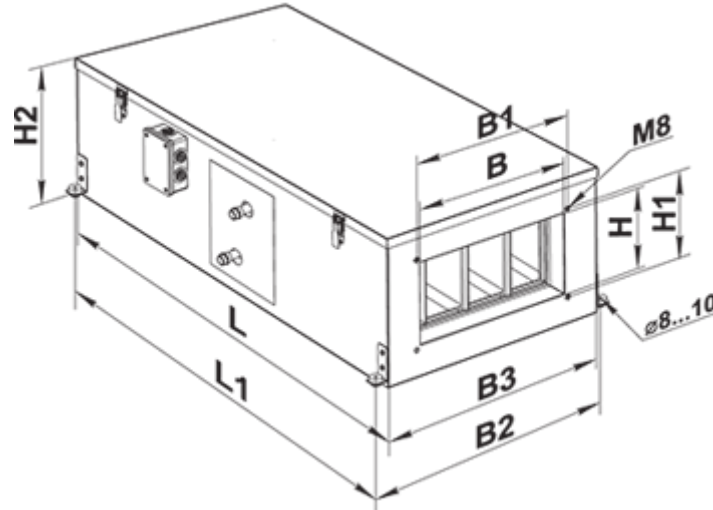



Accessories


For rectangular ducts

Name	Photo	Description
SR 400x200		The plate silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems

Mixing chambers

Name	Photo	Description
USWK 3/4-4		The mixing unit USWK is designed for smooth heat medium flow control in ventilation systems equipped with water heaters or coolers for supply air temperature regulation
USWK 3/4-6		The mixing unit USWK is designed for smooth heat medium flow control in ventilation systems equipped with water heaters or coolers for supply air temperature regulation

Water coolers


Name	Photo	Description
OKW 400x200-3		Duct water coil air coolers are designed for cooling of supply air in rectangular ventilation systems and can be applied in supply or supply and exhaust ventilation systems

Airflow regulators

Name	Photo	Description
------	-------	-------------

RRV 400x200		Air flow controllers
-----------------------------	-----------------------------------------------------------------------------------	----------------------


Mixing chambers

Name	Photo	Description
SKRA 400x200/24		The mixing chambers is designed for mixing (recirculation) of extract and intake air in a required ratio



For rectangular ducts

Name	Photo	Description
VVG 400x200		Flexible anti-vibration connector

Freon coolers

Name	Photo	Description
OKF 400x200-3		Direct-expansion duct coolers are designed for cooling of supply air in rectangular ventilation systems and can be used either for supply or supply and exhaust units

Other accessories

Name	Photo	Description
SFK 474x269x27 G4		G4 pocket filter
SFK 474x269x27 F7		F7 pocket filter