


PA 03 E LCD



Suspended air supply units in the sound- and heat-insulated casing with the water or electric heater


- Power of electrical reheater: 21000
- Maximum airflow: 3350
- Sound pressure level LpA at 3 m: 57
- Filter: G4
- Sound insulation
- Motor type: AC
- Reheater: Electric
- Control: Remote Control
- Casing material: Galvanized steel

	Unit of measurement	PA 03 E LCD
Connected air duct size	mm	600x350
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	1330
Power of electrical reheater	W	21000
Unit current	A	32.4
Maximum airflow	m ³ /h	3350
Sound pressure level LpA at 3 m	dB(A)	57
Weight	kg	91
Filter	-	G4
Transported air temperature (max)	°C	45
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	-25
Ambient air temperature max	°C	45
Ambient air humidity max	%	80
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

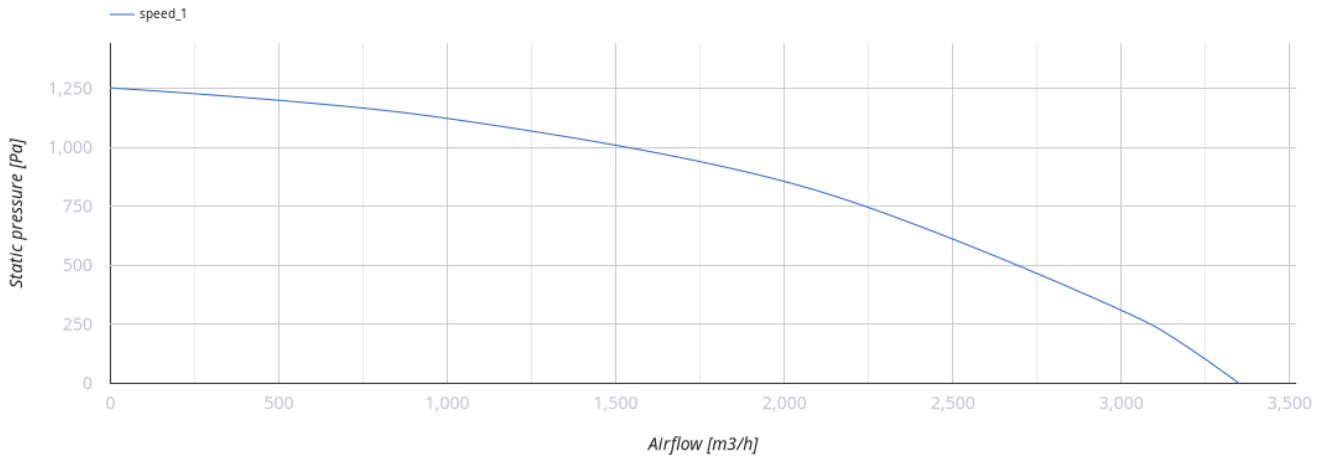

Dimensions

B	B1	B2	B3	H	H1	H2	L	L1
600	620	888	744	350	370	500	1252	1212

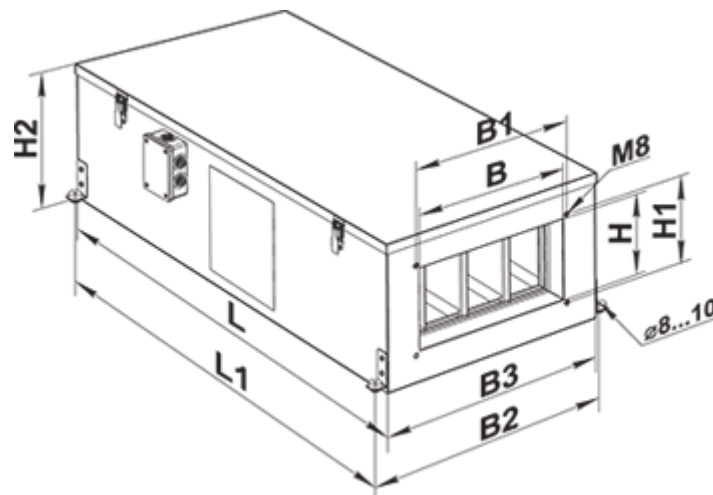

Accessories

For rectangular ducts


Name	Photo	Description
SR 600x350		Plate silencer for installation in rectangular ducts

Airflow regulators


Name	Photo	Description
------	-------	-------------

RRV 600x350		Air flow controllers
-----------------------------	---	----------------------

Mixing chambers

Name	Photo	Description
SKRA 600x350/24		Mixing chambers for mixing (recirculating) part of the exhaust air with the outdoor air in the appropriate proportion

For rectangular ducts

Name	Photo	Description
VVG 600x350		Flexible anti-vibration inserts for round air ducts

Water coolers

Name	Photo	Description
OKW 600x350-3		Rectangular inline water coolers

Freon coolers

Name	Photo	Description
OKF 600x350-3		Rectangular inline direct evaporative coolers

Other accessories

Name	Photo	Description
SF 635x395x48 G4		Panel filter G4