


Quiet-Disc 100 TP



Axial exhaust fans Quiet-Disc feature low noise and high performance


- Maximum airflow: 97
- Sound pressure level LpA at 3 m: 25
- Motor type: AC
- Casing material: Plastic
- Backdraft protection: Backdraft damper
- Motion sensor
- Timer: Turn off timer

| | Unit of measurement | Quiet-Disc 100 TP |
|---------------------------------|---------------------|-------------------|
| Connected air duct size | mm | 100 |
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50 |
| Rated power | W | 7.5 |
| Unit current | A | 0.049 |
| Maximum airflow | m ³ /h | 97 |
| Sound pressure level LpA at 3 m | dB(A) | 25 |
| Weight | kg | 0.55 |
| Ambient air temperature min | °C | 1 |
| Ambient air temperature max | °C | 40 |
| Ingress protection rating | - | IP45 |

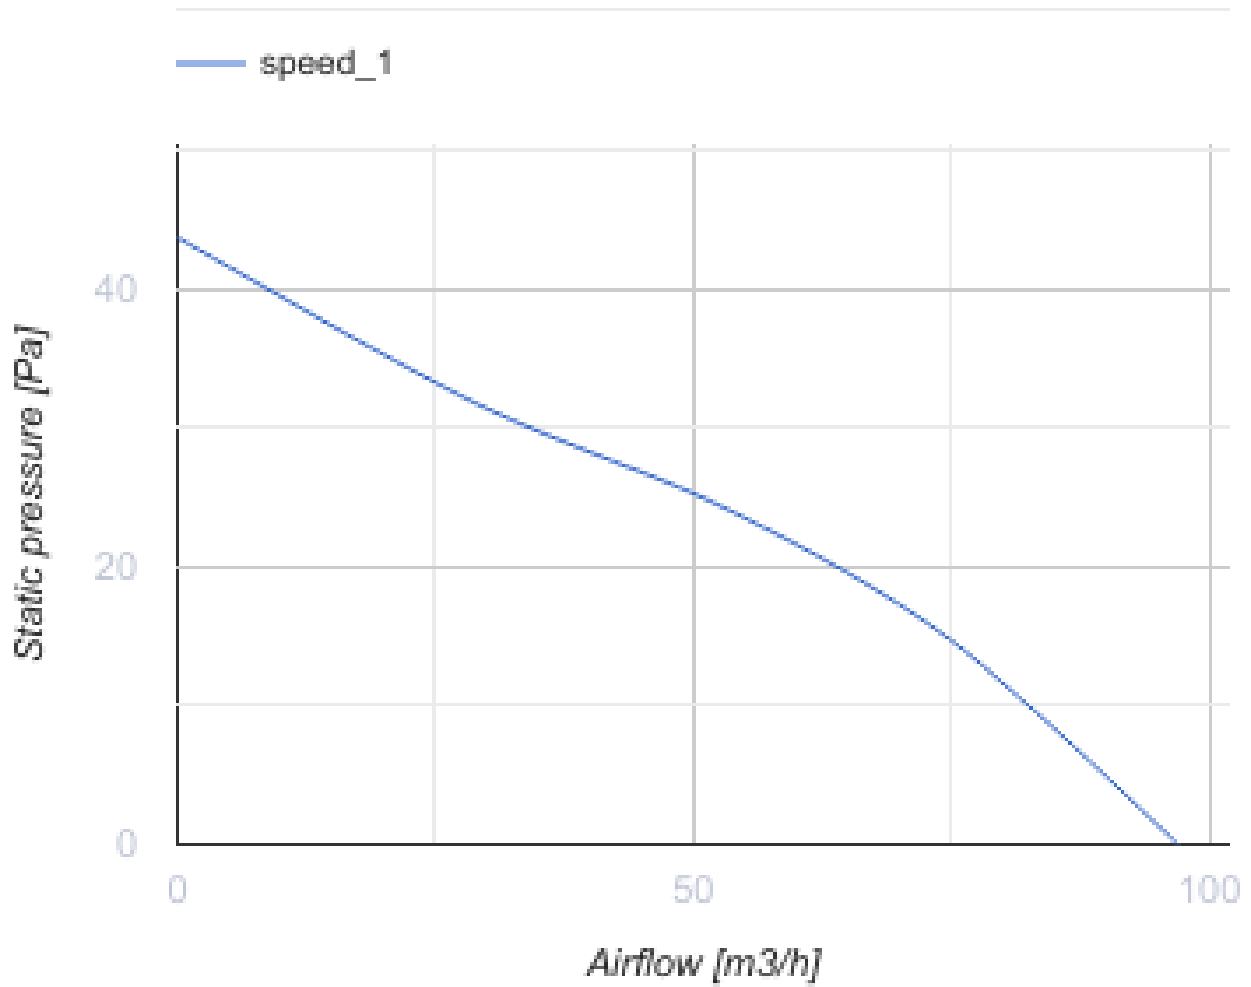


Dimensions

| ØD | B | H | L | L1 |
|----|-----|-----|----|----|
| 99 | 158 | 136 | 81 | 26 |

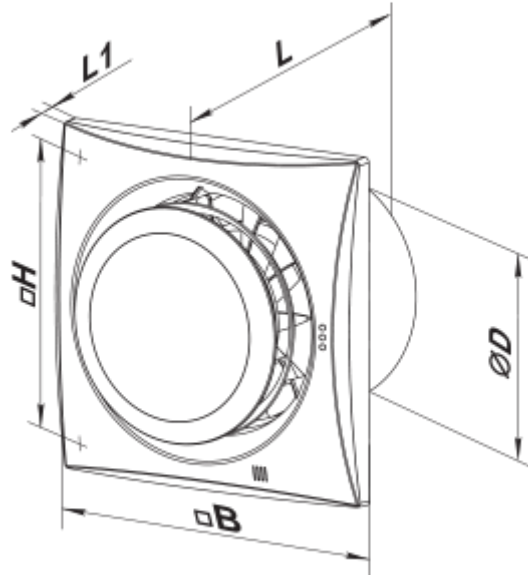


Accessories

Flanges

| Name | Photo | Description |
|------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| FO_100 |  | The window flange applicable for all VENTS fans except for VKO, VKO1, iFan, Quiet, MAO, CF |

Ecodesign

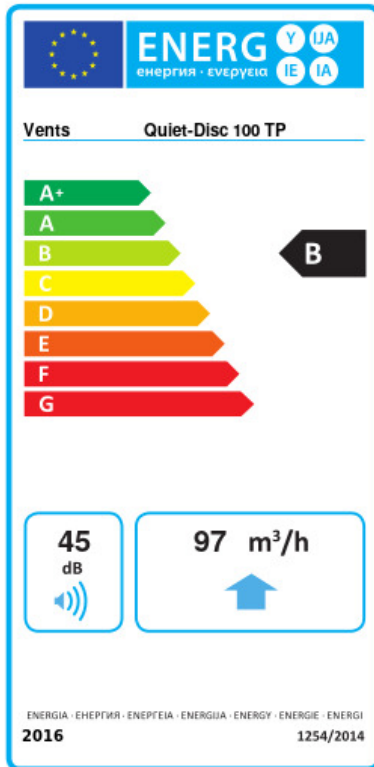

| | | | | | | |
|-------------------------------------------------------------|----------------------|----|---------|---|-------|---|
| Trademark | Vents | | | | | |
| Model | Quiet-Disc 100 TP | | | | | |
| Specific energy consumption (SEC) (kWh/(m ² /a)) | Cold | | Average | | Warm | |
| | -53.8 | A+ | -26.7 | B | -11.2 | E |
| Type of ventilation unit | Unidirectional | | | | | |
| Type of drive installed | Single speed | | | | | |
| Type of heat recovery system | None | | | | | |
| Maximum flow rate (m ³ /h) | 97 | | | | | |
| Electric power input (W) | 7.5 | | | | | |
| Reference flow rate (m ³ /s) | 0.019 | | | | | |
| Specific power input (SPI) (W/(m ³ /h)) | 0.077 | | | | | |
| Control typology | Local demand control | | | | | |
| Maximum external leakage rates (%) | 2.7 | | | | | |
| Sound power level (dB(A)) | 45 | | | | | |
| Declared typology | RVU UVU | | | | | |
| The annual electricity consumption (AEC) (kWh/a) | Cold | | Average | | Warm | |
| | 63 | | 63 | | 63 | |
| The annual heating saved (AHS) (kWh/a) | Cold | | Average | | Warm | |
| | 5536 | | 2830 | | 1280 | |