


# Quietline 125 T



Extra quiet axial inline fans with low power consumption

- Maximum airflow: 197
- Sound pressure level LpA at 3 m: 32
- Motor type: AC
- Casing material: Polypropylene/Thermoplastic elastomer
- Backdraft protection: Backdraft damper
- Timer: Turn off timer

	Unit of measurement	Quietline 125 T
Connected air duct size	mm	125
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	13
Unit current	A	0.085
Maximum airflow	m <sup>3</sup> /h	197
Sound pressure level LpA at 3 m	dB(A)	32
Weight	kg	0.75
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ingress protection rating	-	IPX4

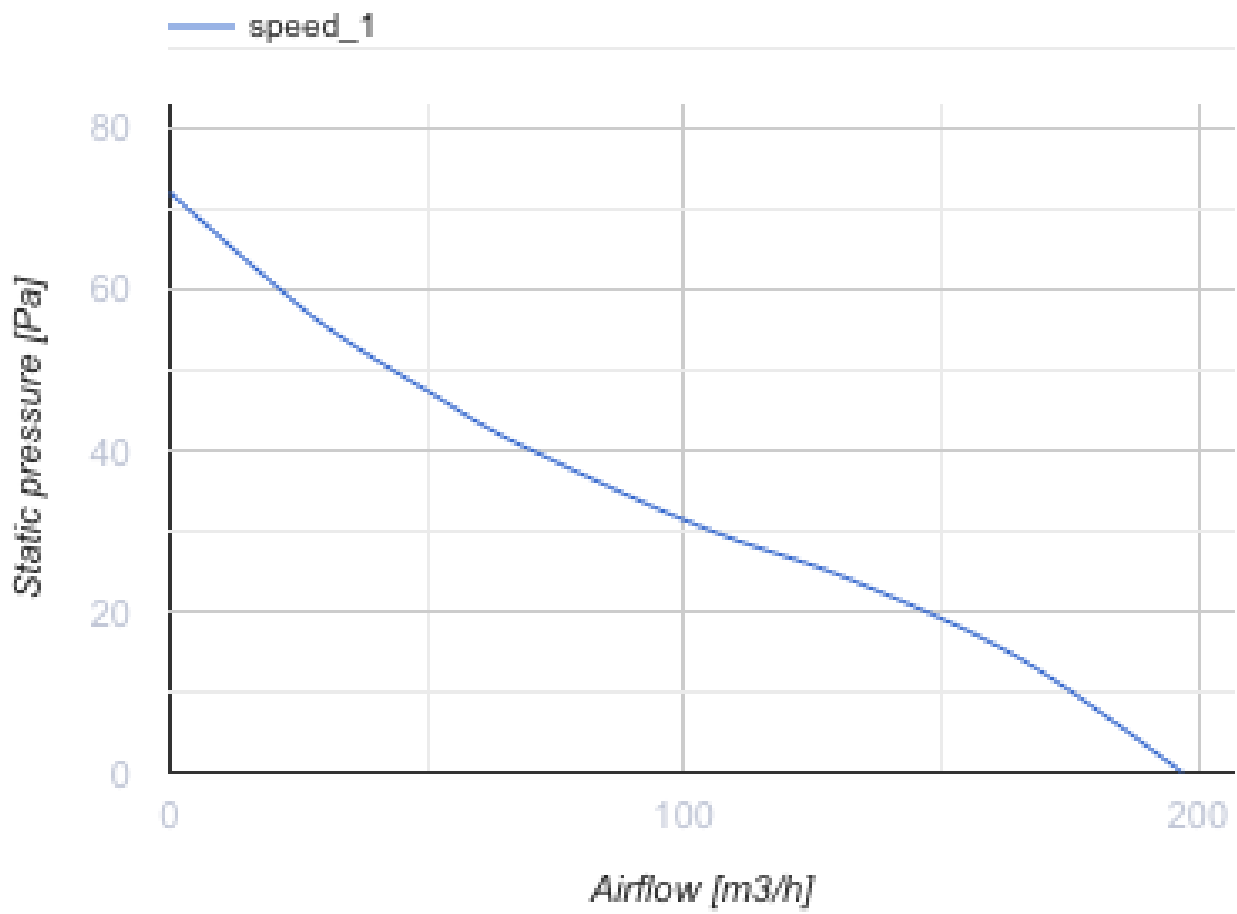


### Dimensions

L	ØD	k
161.5	125	-



## Ecodesign

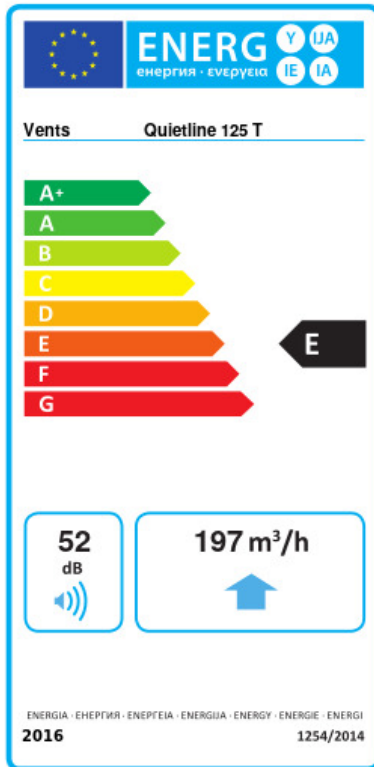

Trademark	Vents					
Model	Quietline 125 T					
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold		Average		Warm	
	-34.7	A	-16.8	E	-6.5	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Single speed					
Type of heat recovery system	None					
Maximum flow rate (m <sup>3</sup> /h)	197					
Electric power input (W)	13					
Reference flow rate (m <sup>3</sup> /s)	0.038					
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.066					
Control typology	Clock control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	52					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	79		79		79	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	3667		1874		848	