

Stream 100/125 (100 spigot)

Sound- and heat-insulated mixed flow duct fans


- Maximum airflow: 220
- Sound pressure level LpA at 3 m: 27
- Sound insulation
- Motor type: AC
- Impeller type: Mixed
- Casing material: Plastic
- Installation in any position




	Unit of measurement	Stream 100/125 (100 spigot)		
Connected air duct size	mm	100		
Speed	-	3		
Phases	-	1		
Minimum supply voltage	V	230		
Maximum supply voltage	V	230		
Power supply frequency	Hz	50		
Rated power	W	28	31	32
Unit current	A	0.13	0.14	0.15
Maximum airflow	m ³ /h	114	147	220
rotation speed at 50hz	-	1568	1952	2362
Sound pressure level LpA at 3 m	dB(A)	19	23	27
Weight	kg	5		
Transported air temperature (max)	°C	55		
Transported air temperature (min)	°C	-25		
Ingress protection rating	-	IPX4		
Ingress protection rating of the drive	-	IP20		
ErP compliance	-	2016, 2018		
Cold - Specific energy consumption (SEC)	kWh/(m ² /a)	54		
SEC Class Cold	-	A+		

Average - Specific energy consumption (SEC)	kWh/(m ² /a)	26.9
SEC Class Average	-	B
Warm - Specific energy consumption (SEC)	kWh/(m ² /a)	11.4
SEC Class Warm	-	E
Unit category	-	RVU
Type of ventilation unit	-	Unidirectional
Type of drive installed	-	Variable speed
Type of heat recovery system	-	None
Maximum flow rate	m ³ /h	320
Electric power input	W	34
Reference flow rate	m ³ /s	0.062
Specific power input (SPI)	W/(m ³ /h)	0.106
Control typology	-	Local demand control
Maximum external leakage rates	%	2.7
Cold - The annual electricity consumption (AEC)	kWh/a	56
Average - The annual electricity consumption (AEC)	kWh/a	56
Warm - Jährlicher Stromverbrauch (JSV)	kWh/a	56
Cold - The annual heating saved (AHS)	kWh/a	5536
The annual heating saved (AHS) Average	kWh/a	2830
The annual heating saved (AHS) Warm	kWh/a	1280
Declared typology	-	RVU UVU
Sound power level	dB(A)	28



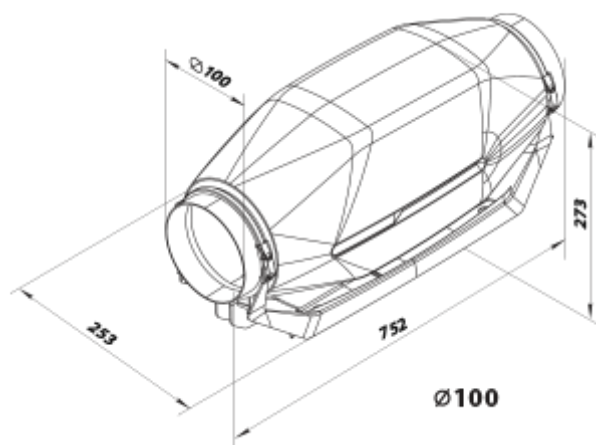

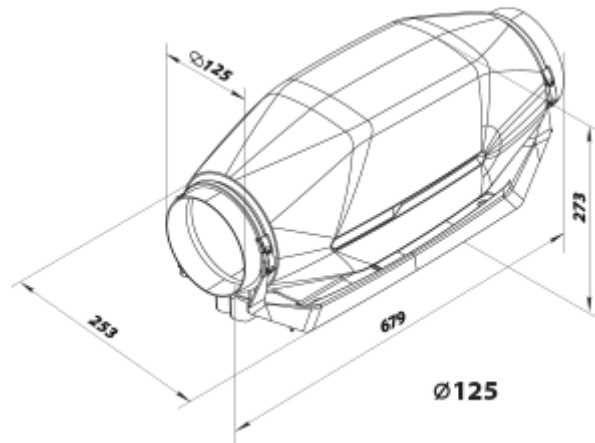

Dimensions











Accessories

For round ducts





Name	Photo	Description
SR 100/600		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 100/900		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 100/1200		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 125/600		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 125/900		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 125/1200		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems

For round ducts







Name	Photo	Description
KOMu 100		Spring-loaded backdraft damper for round ducts
KOMu 125		Spring-loaded backdraft damper for round ducts
KOM 100		Spring-loaded backdraft damper for round ducts


KOM 125		Spring-loaded backdraft damper for round ducts
KR 100		Air damper for air flow control in round air ducts
KR 125		Air damper for air flow control in round air ducts

Water heaters



Name	Photo	Description
NKV 125-4		Duct water heaters are designed for heating of supply air in round ventilation systems. They can be also applied in supply or supply and exhaust ventilating units
NKV 125-2		Duct water heaters are designed for heating of supply air in round ventilation systems. They can be also applied in supply or supply and exhaust ventilating units
NKV 100-2		Duct water heaters are designed for heating of supply air in round ventilation systems. They can be also applied in supply or supply and exhaust ventilating units
NKV 100-4		Duct water heaters are designed for heating of supply air in round ventilation systems. They can be also applied in supply or supply and exhaust ventilating units

For round ducts


Name	Photo	Description
FB 100		Panel filters
FB 125		Panel filters
FBK 125-7		Pocket filter
FBK 125-5		Pocket filter
FBK 125-4		Pocket filter
FBK 100-7		Pocket filter

FBK 100-5		Pocket filter
FBK 100-4		Pocket filter





Temperature regulators

Name	Photo	Description
RTSD-1-400		Temperature regulator
RTS-1-400		Temperature regulator

Speed control switches





Name	Photo	Description
P2-1-300		Switch
P3-1-300		Switch

Sensors

Name	Photo	Description
TF-1,5 N		Sensor
TP-1,5 N		Sensor
T-1,5 N		Sensor
TH-1,5 N		Sensor

Electrical heaters

Name	Photo	Description
NK 100-1,8-1		Duct electric heater

NK 100-1,6-1		Duct electric heater
NK 100-1,2-1		Duct electric heater
NK 100-0,8-1		Duct electric heater
NK 100-0,6-1		Duct electric heater