

Stream 150/160 EC


Sound- and heat-insulated mixed flow duct fans with EC motor

- Maximum airflow: 600
- Sound pressure level LpA at 3 m: 38
- Sound insulation
- Motor type: EC
- Impeller type: Mixed
- Casing material: Plastic
- Installation in any position





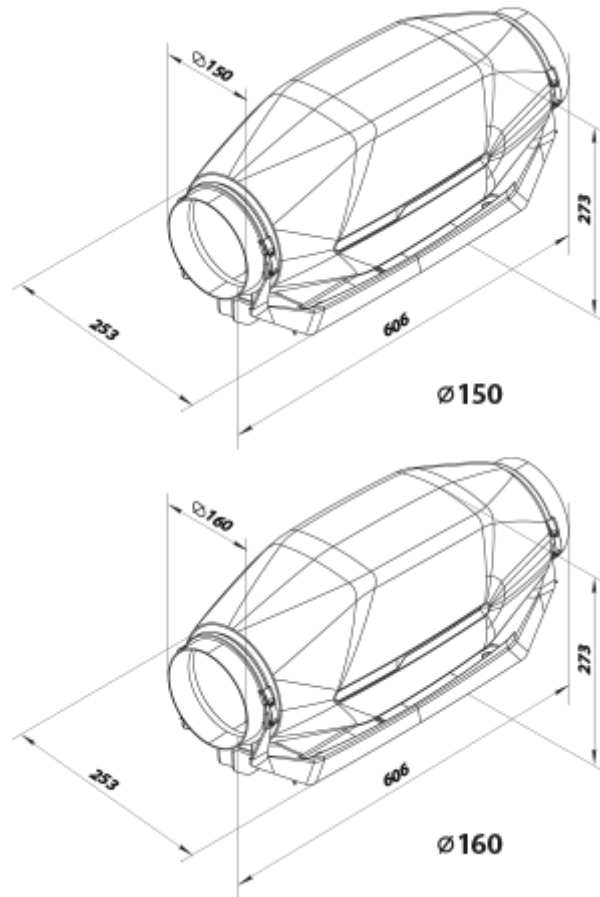

	Unit of measurement	Stream 150/160 EC
Connected air duct size	mm	150/160
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	55
Unit current	A	0.49
Maximum airflow	m ³ /h	600
rotation speed at 50hz	-	3506
Sound pressure level LpA at 3 m	dB(A)	38
Weight	kg	5
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

Dimensions


















Accessories





Water heaters

Name	Photo	Description
NKV 160-4		Duct water heaters are designed for heating of supply air in round ventilation systems. They can be also applied in supply or supply and exhaust ventilating units
NKV 160-2		Duct water heaters are designed for heating of supply air in round ventilation systems. They can be also applied in supply or supply and exhaust ventilating units
NKV 150-4		Duct water heaters are designed for heating of supply air in round ventilation systems. They can be also applied in supply or supply and exhaust ventilating units
NKV 150-2		Duct water heaters are designed for heating of supply air in round ventilation systems. They can be also applied in supply or supply and exhaust ventilating units









Electrical heaters

Name	Photo	Description
NK 160-3.4-1		Duct electric heater


NK 160-2,0-1		Duct electric heater
NK 160-1,7-1		Duct electric heater
NK 160-1,2-1		Duct electric heater
NK 150-3,4-1		Duct electric heater
NK 150-2,4-1		Duct electric heater
NK 150-1,7-1		Duct electric heater
NK 150-1,2-1		Duct electric heater
NK 160-2,4-1		Duct electric heater
NK 150-2,0-1		Duct electric heater
NK 150-1,2-1 U		Duct electric heater with temperature controller or control unit
NK 150-1,7-1 U		Duct electric heater with temperature controller or control unit
NK 150-2,0-1 U		Duct electric heater with temperature controller or control unit
NK 150-2,4-1 U		Duct electric heater with temperature controller or control unit
NK 150-3,4-1 U		Duct electric heater with temperature controller or control unit
NK 160-1,2-1 U		Duct electric heater with temperature controller or control unit






NK 160-1,7-1 U		Duct electric heater with temperature controller or control unit
NK 160-2,0-1 U		Duct electric heater with temperature controller or control unit
NK 160-2,4-1 U		Duct electric heater with temperature controller or control unit
NK 160-3,4-1 U		Duct electric heater with temperature controller or control unit

For round ducts





Name	Photo	Description
FBK 160-7		Pocket filter
FBK 160-5		Pocket filter
FBK 160-4		Pocket filter
FBK 150-7		Pocket filter
FBK 150-5		Pocket filter
FBK 150-4		Pocket filter
FB 160		Panel filters
FB 150		Panel filters

For round ducts

Name	Photo	Description
SR 150/600		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems

SR 150/900		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 150/1200		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 160/1200		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 160/900		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems
SR 160/600		Silencer is applied for noise absorption produced during the ventilating equipment operation and spread along the ducting systems

For round ducts

Name	Photo	Description
KOM 150		Spring-loaded backdraft damper for round ducts
KOM 160		Spring-loaded backdraft damper for round ducts
KR 150		Air damper for air flow control in round air ducts
KR 160		Air damper for air flow control in round air ducts

Speed controllers

Name	Photo	Description
R-1/010		Speed controller for EC motors