


TT 125




Inline mixed-flow fans

- Maximum airflow: 280
- Sound pressure level LpA at 3 m: 37
- Motor type: AC
- Impeller type: Mixed-flow
- Casing material: Plastic
- Installation in any position


	Unit of measurement	TT 125	
Connected air duct size	mm	125	
Speed	-	2	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50/60	
Rated power	W	23	37
Unit current	A	0.18	0.27
Maximum airflow	m³/h	220	280
Sound pressure level LpA at 3 m	dB(A)	28	37
Weight	kg	1.79	
Transported air temperature (max)	°C	40	
Transported air temperature (min)	°C	-25	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IPX4	

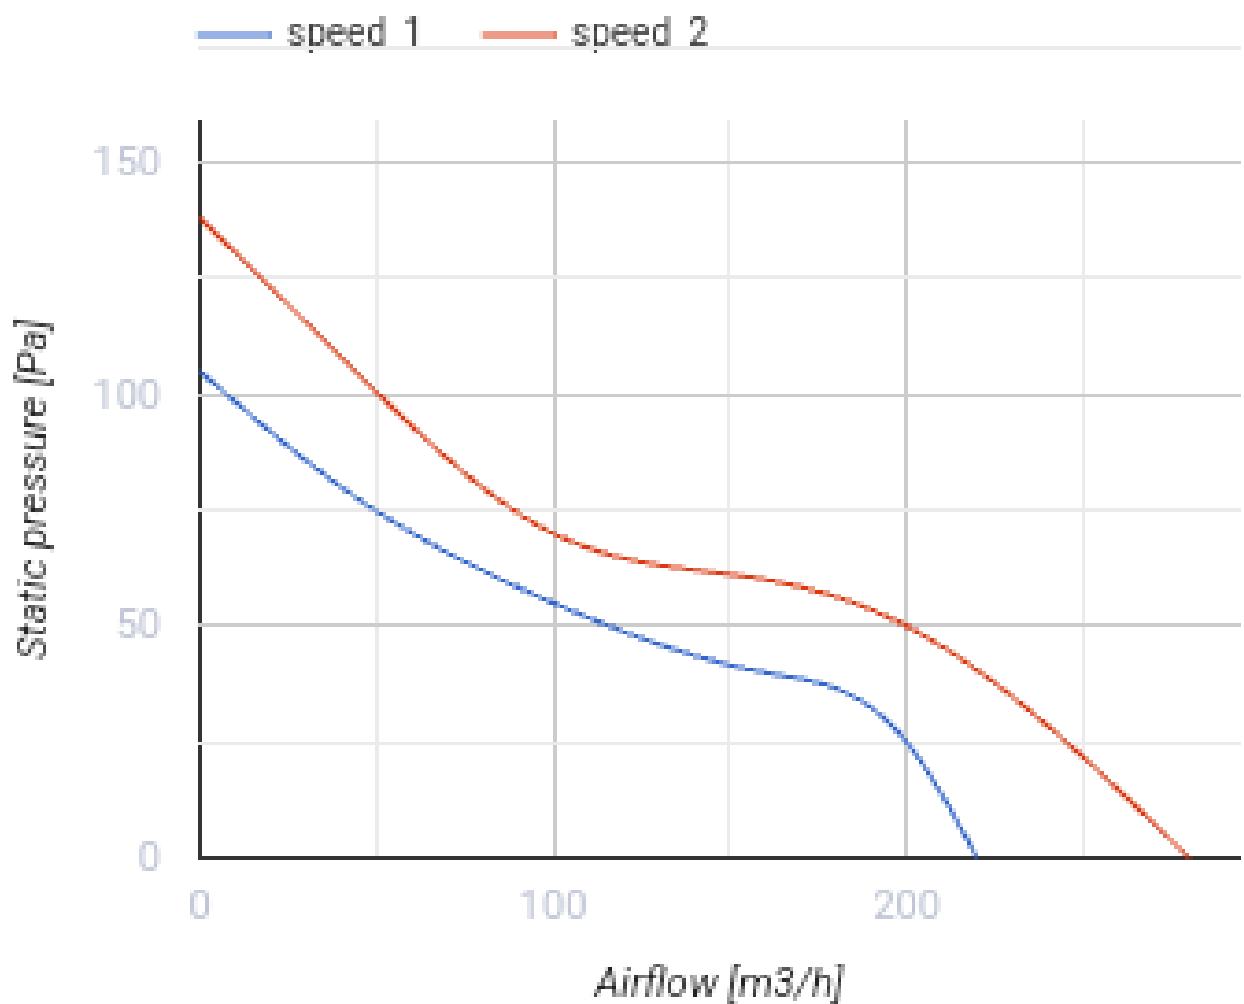

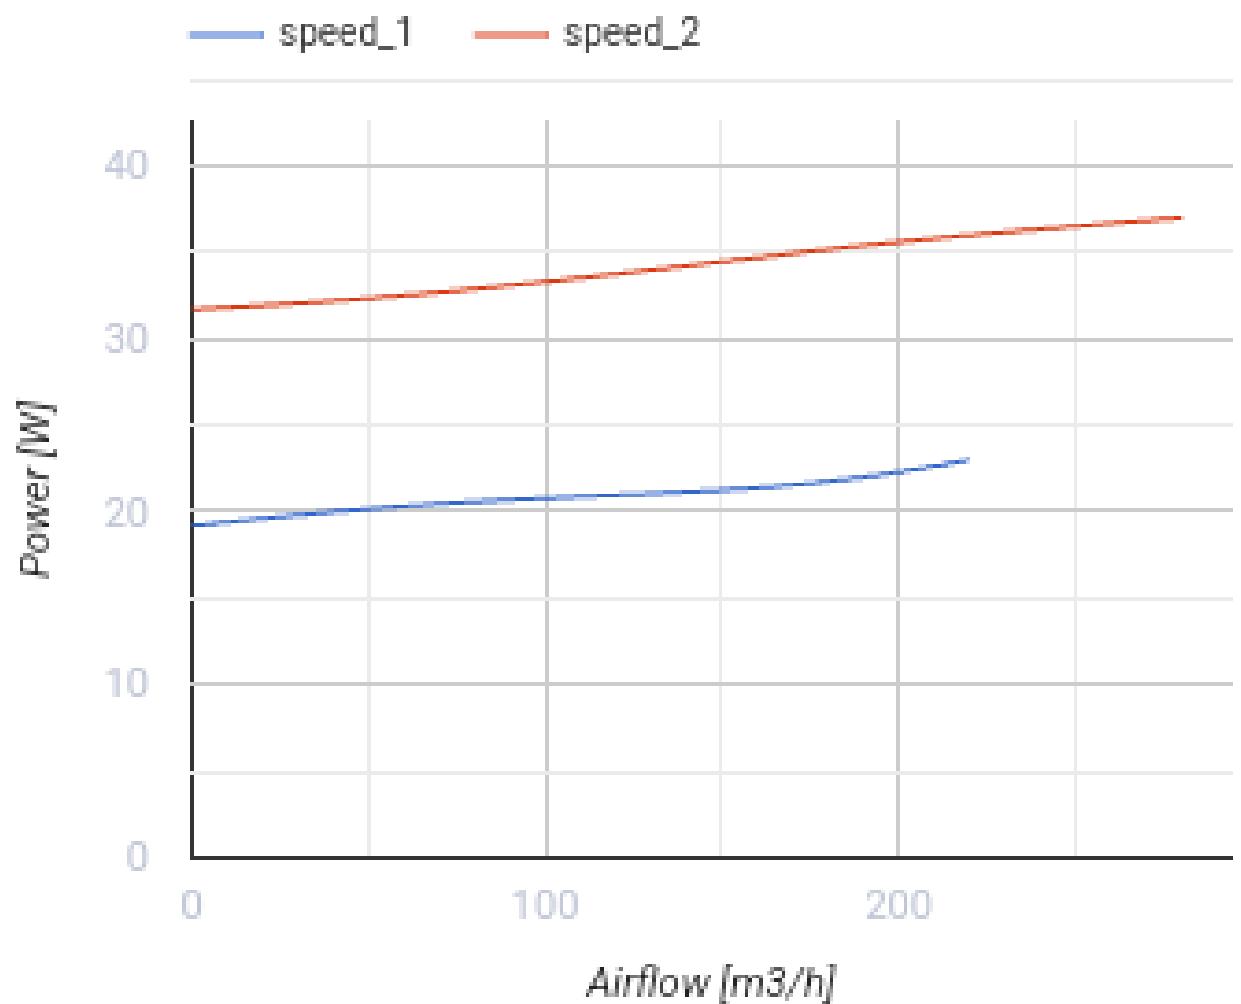


Dimensions

ØD	B	H	L
123	167	190	246

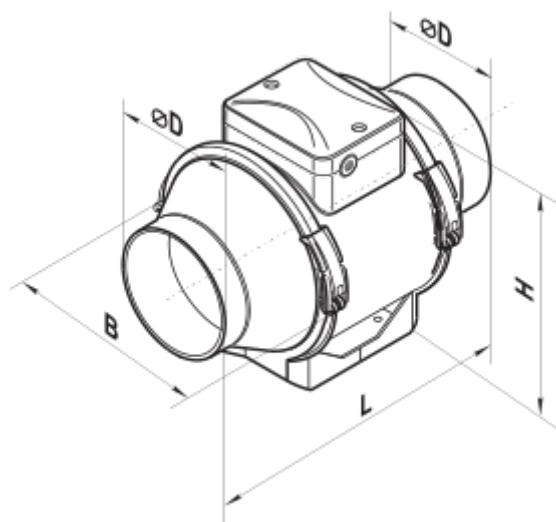

Ecodesign

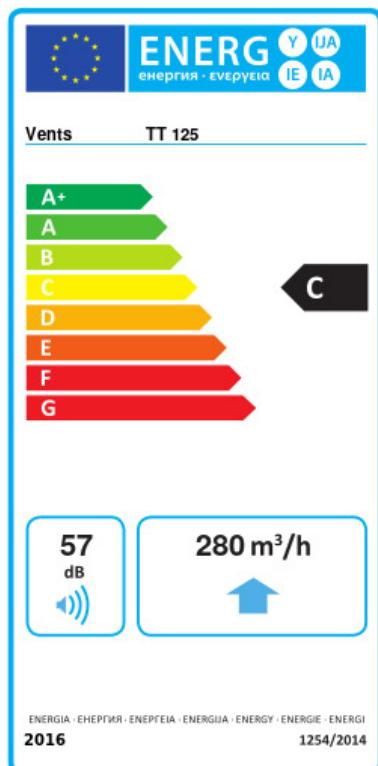

Trademark	Vents		
Model	TT 125		
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold -49.3	Average A+	Warm -24.3 C -9.9 F
Type of ventilation unit	Unidirectional		
Type of drive installed	Variable speed		
Type of heat recovery system	None		
Maximum flow rate (m ³ /h)	280		
Electric power input (W)	37		
Reference flow rate (m ³ /s)	0.049		
Specific power input (SPI) (W/(m ³ /h))	0.135		
Control typology	Local demand control		
Maximum external leakage rates (%)	2.7		
Declared typology	RVU UVU		
Sound power level (dB(A))	57		
The annual electricity consumption (AEC) (kWh/a)	Cold 78	Average 78	Warm 78
The annual heating saved (AHS) (kWh/a)	Cold 5131	Average 2623	Warm 1186