


TT 125 S TR1V



Inline mixed-flow fans

- Maximum airflow: 440
- Sound pressure level LpA at 3 m: 42
- Motor type: AC
- Control: Built-in speed controller
- Impeller type: Mixed-flow
- Casing material: Plastic
- Installation in any position
- Cable with mains plug
- Timer: Turn off timer

| | Unit of measurement | TT 125 S TR1V | |
|--|---------------------|---------------|------|
| Connected air duct size | mm | 125 | |
| Speed | - | 2 | |
| Minimum supply voltage | V | 230 | |
| Maximum supply voltage | V | 230 | |
| Power supply frequency | Hz | 50/60 | |
| Rated power | W | 47 | 60 |
| Unit current | A | 0.21 | 0.27 |
| Maximum airflow | m ³ /h | 295 | 440 |
| Sound pressure level LpA at 3 m | dB(A) | 31 | 42 |
| Weight | kg | 3.14 | |
| Transported air temperature (max) | °C | 60 | |
| Transported air temperature (min) | °C | -25 | |
| Ingress protection rating | - | IPX4 | |
| Ingress protection rating of the drive | - | IPX4 | |

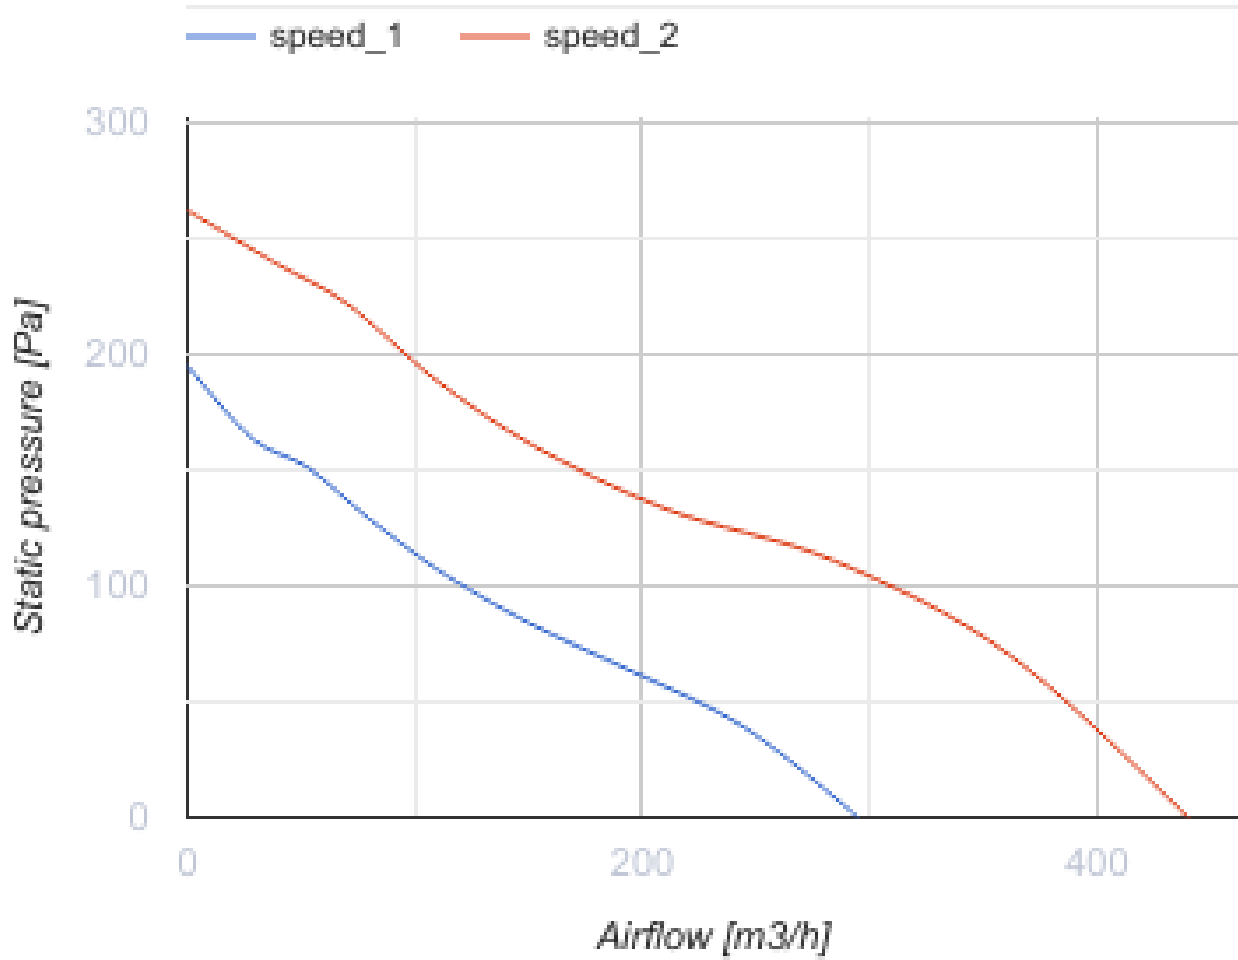

Dimensions

| $\varnothing D$ | B | H | L |
|-----------------|-----|-----|-----|
| 123 | 223 | 250 | 295 |

