


TT PRO 100 R1



Mixed-flow inline fans


- Maximum airflow: 245
- Sound pressure level LpA at 3 m: 32
- Motor type: AC
- Impeller type: Mixed-flow
- Casing material: Plastic
- Installation in any position
- Cable with mains plug

	Unit of measurement	TT PRO 100 R1	
Connected air duct size	mm	100	
Speed	-	2	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50/60	
Rated power	W	23	25
Unit current	A	0.10	0.11
Maximum airflow	m³/h	180	245
Sound pressure level LpA at 3 m	dB(A)	27	32
Weight	kg	1.75	
Transported air temperature (max)	°C	60	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IPX4	

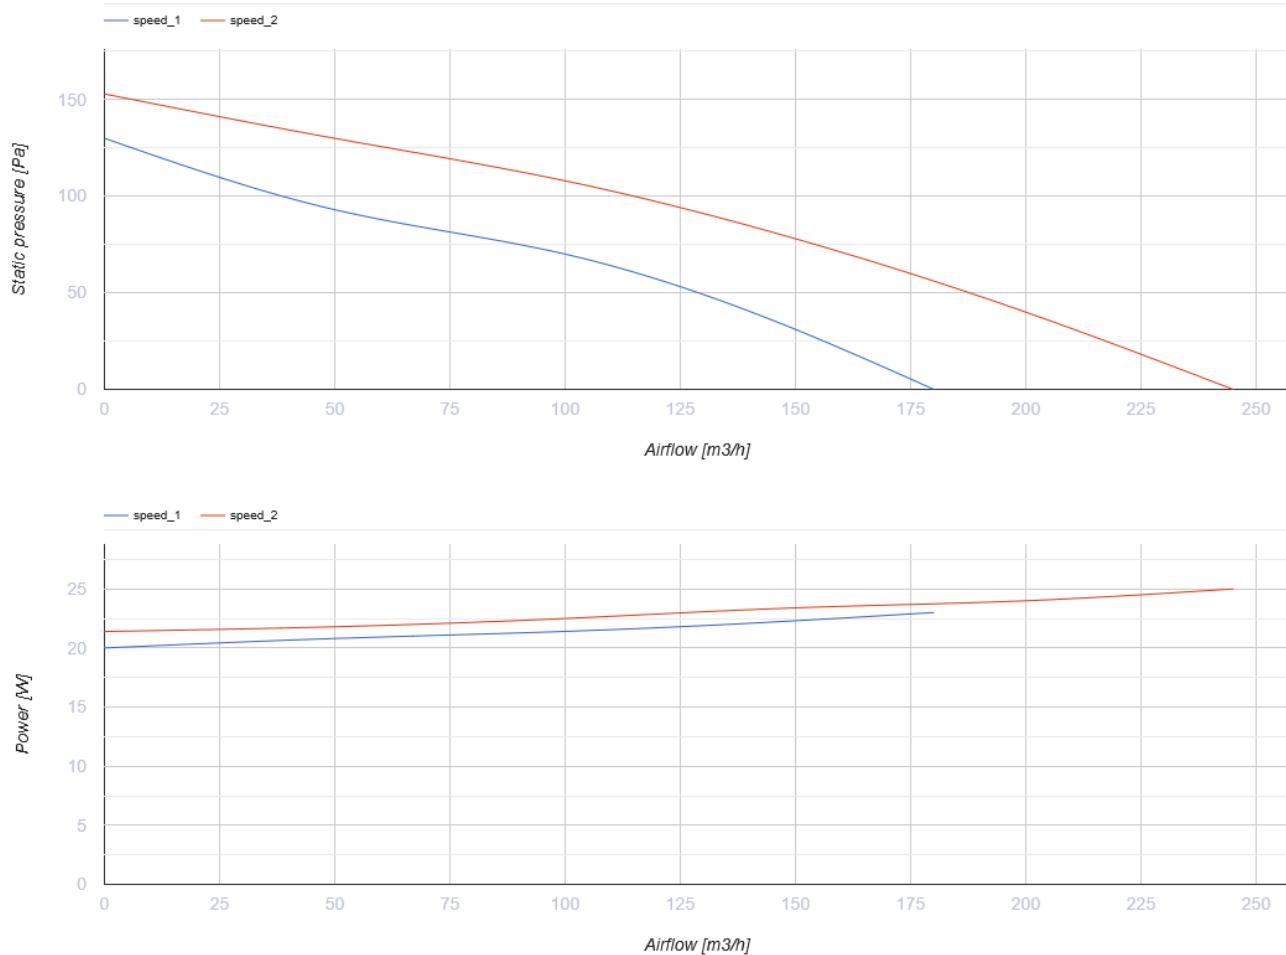


Dimensions

ØD	B	H	L
97	195.8	226	302.5

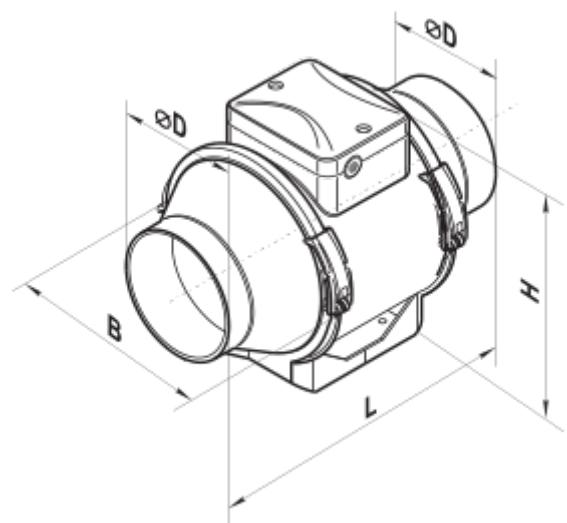

Ecodesign

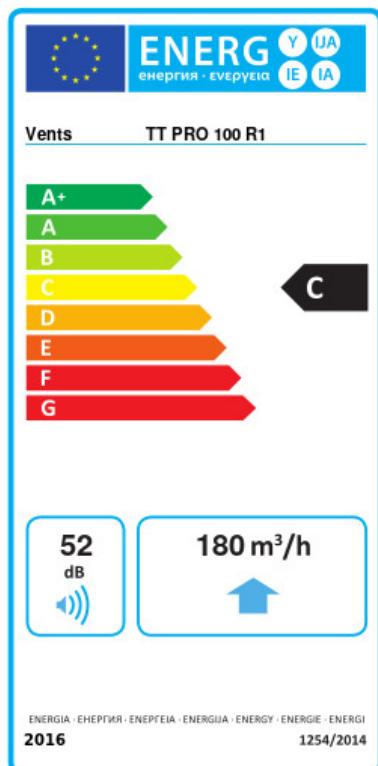

Trademark	Vents		
Model	TT PRO 100 R1		
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm
52.9	A+	25.9	C 10.4 E
Type of ventilation unit	Unidirectional		
Type of drive installed	Variable speed		
Type of heat recovery system	None		
Maximum flow rate (m ³ /h)	180		
Electric power input (W)	25		
Reference flow rate (m ³ /s)	0.035		
Reference pressure difference (Pa)	50		
Specific power input (SPI) (W/(m ³ /h))	0.183		
Control typology	Local demand control		
Maximum external leakage rates (%)	2.7		
Sound power level (dB(A))	52		
Declared typology	RVU UVU		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
97	97	97	97
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
5536	2830	1280	