

# TT PRO 125 U1




## Inline mixed-flow fans

- Maximum airflow: 350
- Sound pressure level LpA at 3 m: 34
- Motor type: AC
- Control: Built-in speed controller
- Impeller type: Mixed
- Casing material: Plastic
- Installation in any position
- Cable with mains plug
- Temperature sensor
- Timer: Turn off timer


	<b>Unit of measurement</b>	<b>TT PRO 125 U1</b>	
Connected air duct size	mm	125	
Speed	-	2	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50/60	
Rated power	W	25	29
Unit current	A	0.11	0.13
Maximum airflow	m³/h	240	350
Sound pressure level LpA at 3 m	dB(A)	29	34
Weight	kg	2.15	
Transported air temperature (max)	°C	60	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IPX4	

## Dimensions

<b>ØD</b>	<b>B</b>	<b>H</b>	<b>L</b>
123	195.6	226	258.5

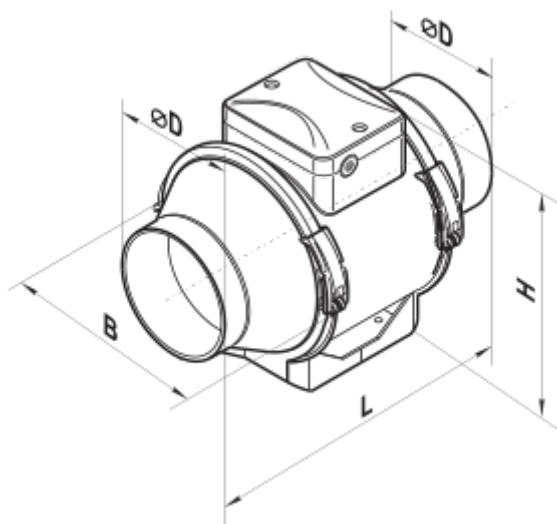

## Ecodesign

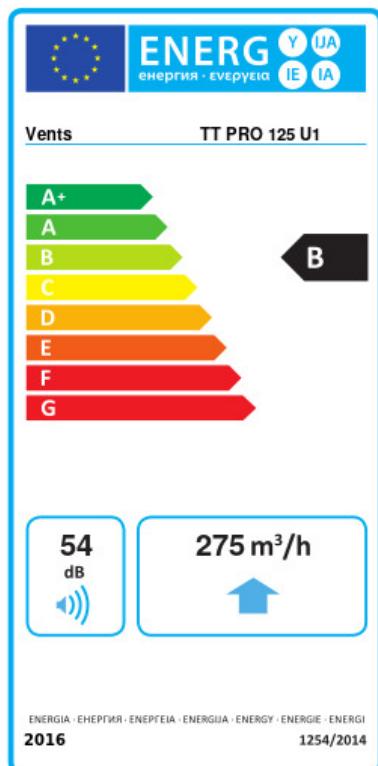

Trademark	Vents		
Model	TT PRO 125 U1		
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold	Average	Warm
53.6	A+	26.6	B 11.1 E
Type of ventilation unit	Unidirectional		
Type of drive installed	Variable speed		
Type of heat recovery system	None		
Maximum flow rate (m <sup>3</sup> /h)	275		
Electric power input (W)	29		
Reference flow rate (m <sup>3</sup> /s)	0.053		
Reference pressure difference (Pa)	50		
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.13		
Control typology	Local demand control		
Maximum external leakage rates (%)	2.7		
Sound power level (dB(A))	54		
Declared typology	RVU UVU		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
69	69	69	
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
5536	2830	1280	