


TT PRO 150



Inline mixed-flow fans


- Maximum airflow: 565
- Sound pressure level LpA at 3 m: 44
- Motor type: AC
- Impeller type: Mixed
- Casing material: Plastic
- Installation in any position

	Unit of measurement	TT PRO 150	
Connected air duct size	mm	150	
Speed	-	2	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50/60	
Rated power	W	42	50
Unit current	A	0.19	0.22
Maximum airflow	m³/h	415	565
Sound pressure level LpA at 3 m	dB(A)	32	44
Weight	kg	2.95	
Transported air temperature (max)	°C	60	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IPX4	

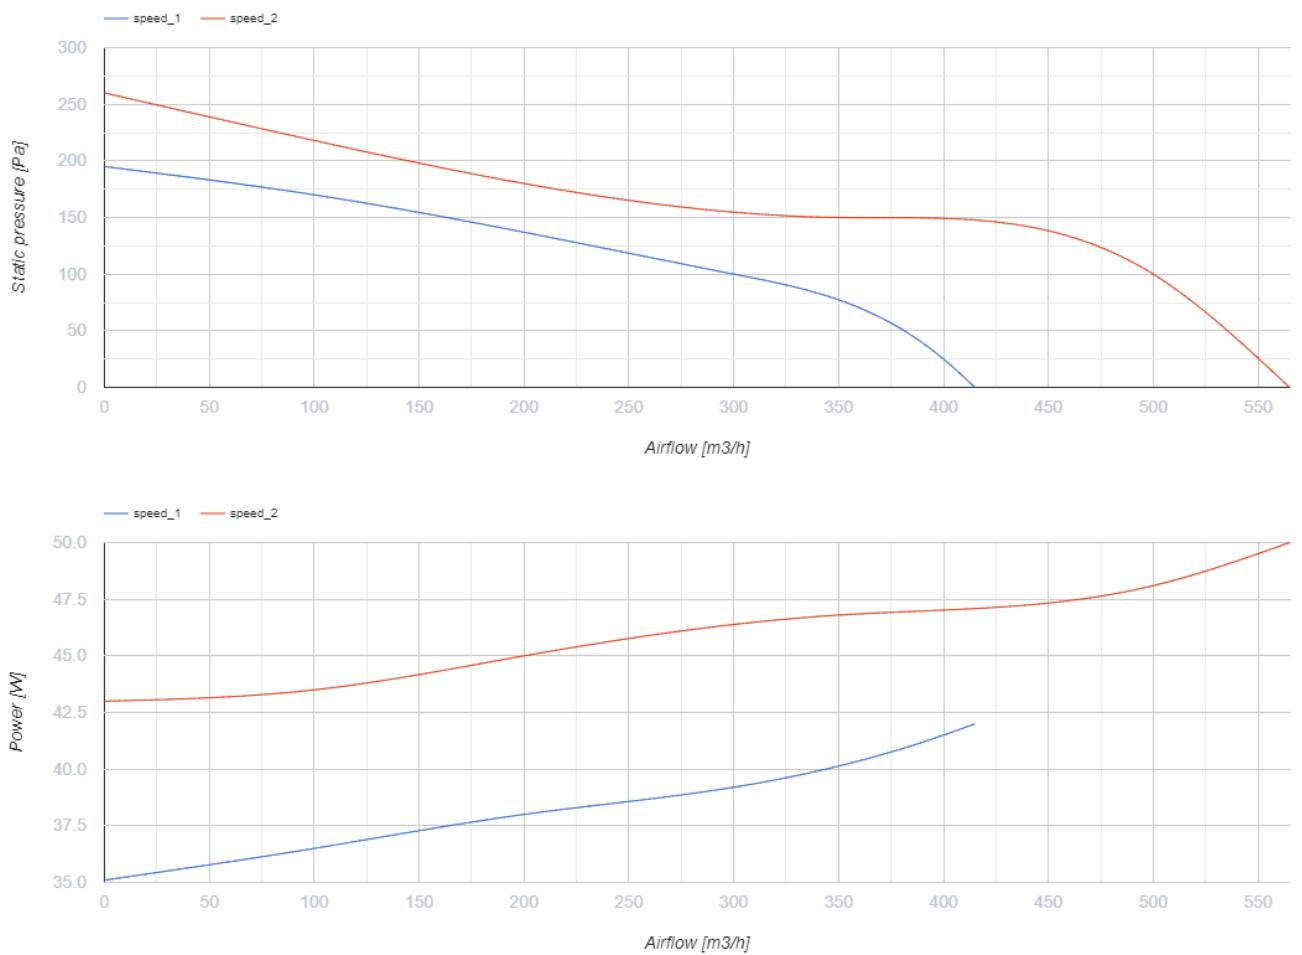


Dimensions

ØD	B	H	L
148	220.1	247	289

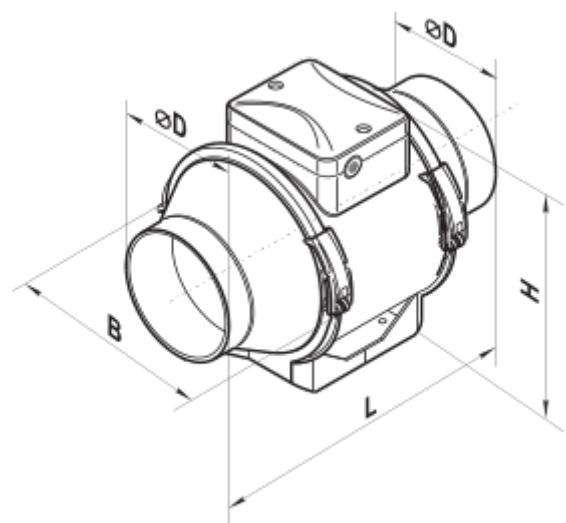

Ecodesign

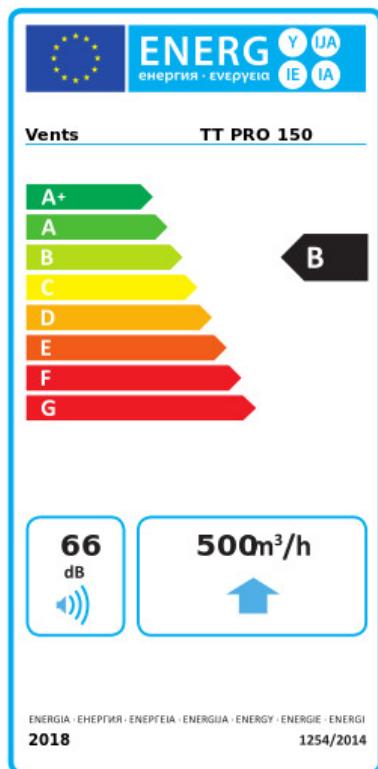

Trademark	Vents			
Model	TT PRO 150			
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm	
	53.8	A+	26.7	B
Type of ventilation unit	Unidirectional			
Type of drive installed	Variable speed			
Type of heat recovery system	None			
Maximum flow rate (m ³ /h)	500			
Electric power input (W)	50			
Reference flow rate (m ³ /s)	0.097			
Reference pressure difference (Pa)	50			
Specific power input (SPI) (W/(m ³ /h))	0.12			
Control typology	Local demand control			
Maximum external leakage rates (%)	2.7			
Declared typology	RVU UVU			
Sound power level (dB(A))	66			
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm	
	64	64	64	
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm	
	5536	2830	1280	