

TT PRO 200 T




Inline mixed-flow fans

- Maximum airflow: 1040
- Sound pressure level LpA at 3 m: 45
- Motor type: AC
- Impeller type: Mixed-flow
- Casing material: Plastic
- Installation in any position
- Timer: Turn off timer


	Unit of measurement	TT PRO 200 T	
Connected air duct size	mm	200	
Speed	-	2	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50/60	
Rated power	W	76	108
Unit current	A	0.34	0.48
Maximum airflow	m³/h	830	1040
Sound pressure level LpA at 3 m	dB(A)	39	45
Weight	kg	3.95	
Transported air temperature (max)	°C	60	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IPX4	

Dimensions

ØD	B	H	L
199	239	261	295.5

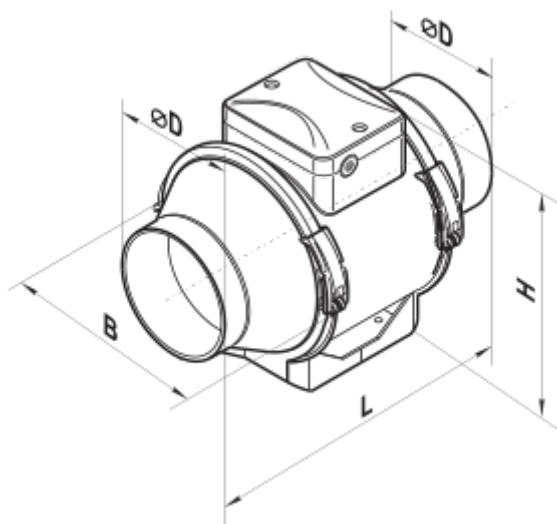

Ecodesign

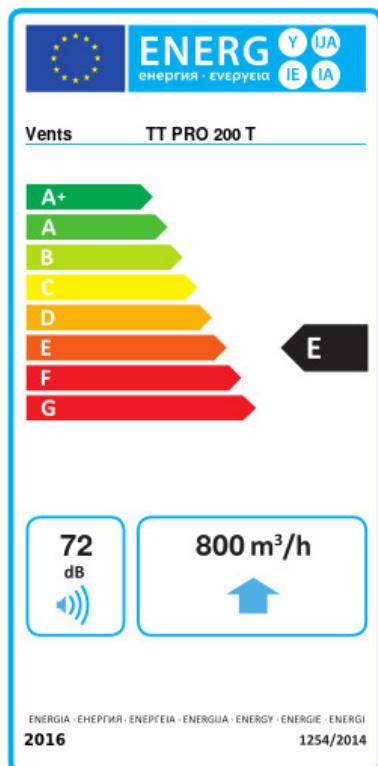

Trademark	Vents		
Model	TT PRO 200 T		
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm
-32.8	B	-14.9	E
Type of ventilation unit	Unidirectional		
Type of drive installed	Variable speed		
Type of heat recovery system	None		
Maximum flow rate (m ³ /h)	800		
Electric power input (W)	108		
Reference flow rate (m ³ /s)	0.156		
Reference pressure difference (Pa)	50		
Specific power input (SPI) (W/(m ³ /h))	0.136		
Control typology	Clock control		
Maximum external leakage rates (%)	2.7		
Declared typology	RVU UVU		
Sound power level (dB(A))	72		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
153	153	153	
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
3667	1874	848	