



# TT PRO 200 U1n



Inline mixed-flow fans

- Maximum airflow: 1040
- Sound pressure level LpA at 3 m: 45
- Motor type: AC
- Control: Built-in speed controller
- Impeller type: Mixed-flow
- Casing material: Plastic
- Installation in any position
- Cable with mains plug
- Temperature sensor
- Timer: Turn off timer

|  | Unit of measurement | TT PRO 200 U1n |      |
|--|---------------------|----------------|------|
| Connected air duct size                | mm                  | 200            |      |
| Speed                                  | -                   | 2              |      |
| Minimum supply voltage                 | V                   | 230            |      |
| Maximum supply voltage                 | V                   | 230            |      |
| Power supply frequency                 | Hz                  | 50/60          |      |
| Rated power                            | W                   | 76             | 108  |
| Unit current                           | A                   | 0.34           | 0.48 |
| Maximum airflow                        | m <sup>3</sup> /h   | 830            | 1040 |
| Sound pressure level LpA at 3 m        | dB(A)               | 39             | 45   |
| Weight                                 | kg                  | 3.95           |      |
| Transported air temperature (max)      | °C                  | 60             |      |
| Ingress protection rating              | -                   | IPX4           |      |
| Ingress protection rating of the drive | -                   | IPX4           |      |

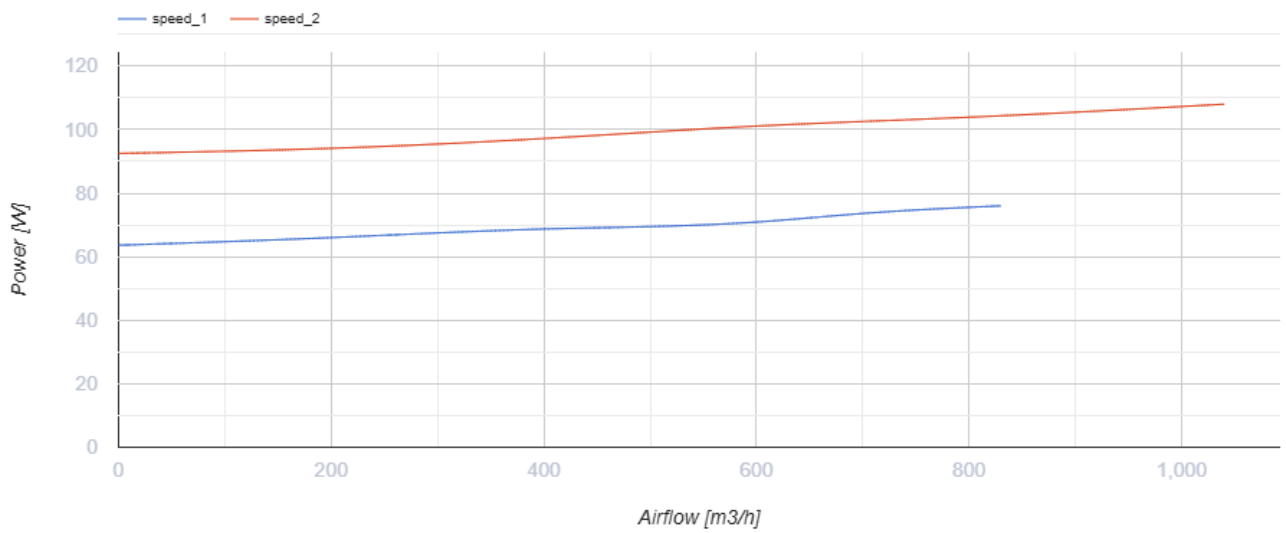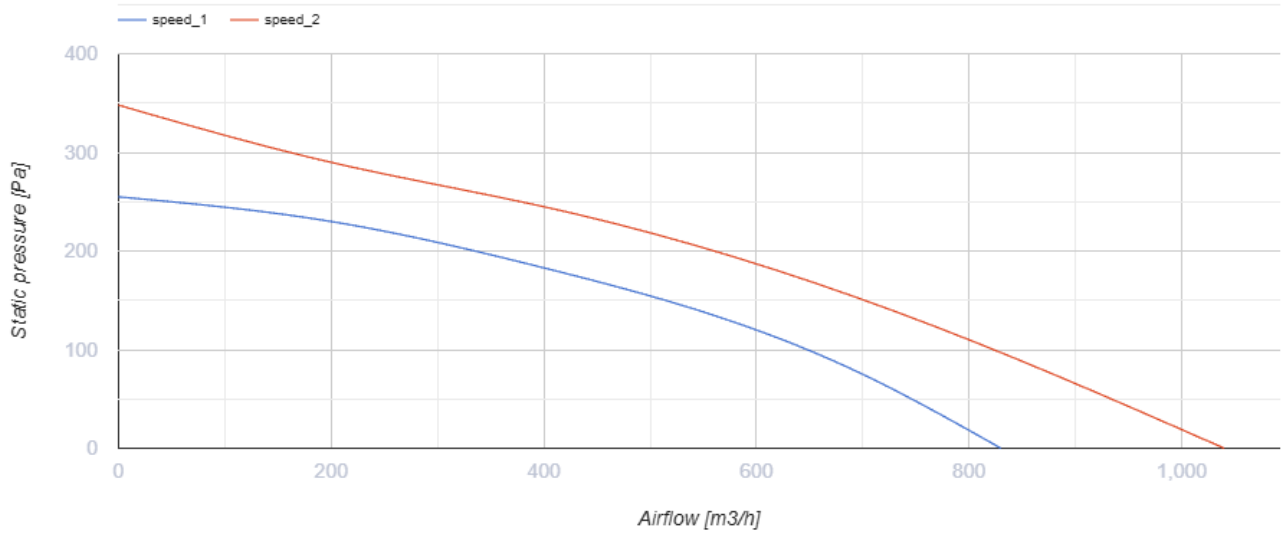

## Dimensions

| ØD  | B   | H   | L     |
|-----|-----|-----|-------|
| 199 | 239 | 261 | 295.5 |

