



# TT PRO 315 EC



Inline mixed-flow fans

- Maximum airflow: 1970
- Sound pressure level LpA at 3 m: 55
- Motor type: EC
- Impeller type: Mixed-flow
- Casing material: Plastic
- Installation in any position

|                                   | Unit of measurement | TT PRO 315 EC |
|-----------------------------------|---------------------|---------------|
| Connected air duct size           | mm                  | 315           |
| Speed                             | -                   | 1             |
| Minimum supply voltage            | V                   | 230           |
| Maximum supply voltage            | V                   | 230           |
| Power supply frequency            | Hz                  | 50/60         |
| Rated power                       | W                   | 284           |
| Unit current                      | A                   | 1.25          |
| Maximum airflow                   | m <sup>3</sup> /h   | 1970          |
| Sound pressure level LpA at 3 m   | dB(A)               | 55            |
| Weight                            | kg                  | 11.95         |
| Transported air temperature (max) | °C                  | 55            |
| Transported air temperature (min) | °C                  | -25           |
| Ingress protection rating         | -                   | IPX4          |

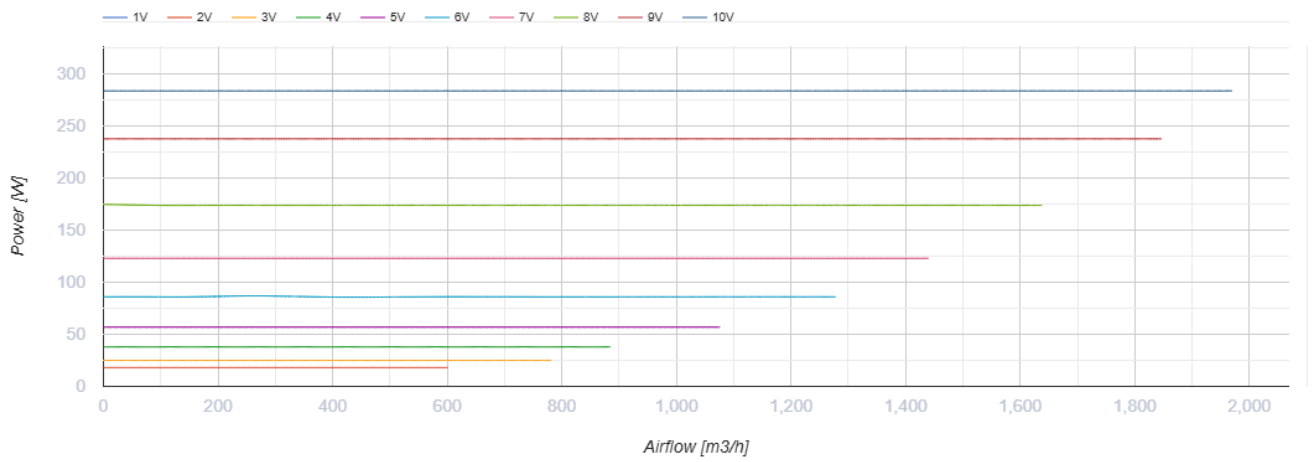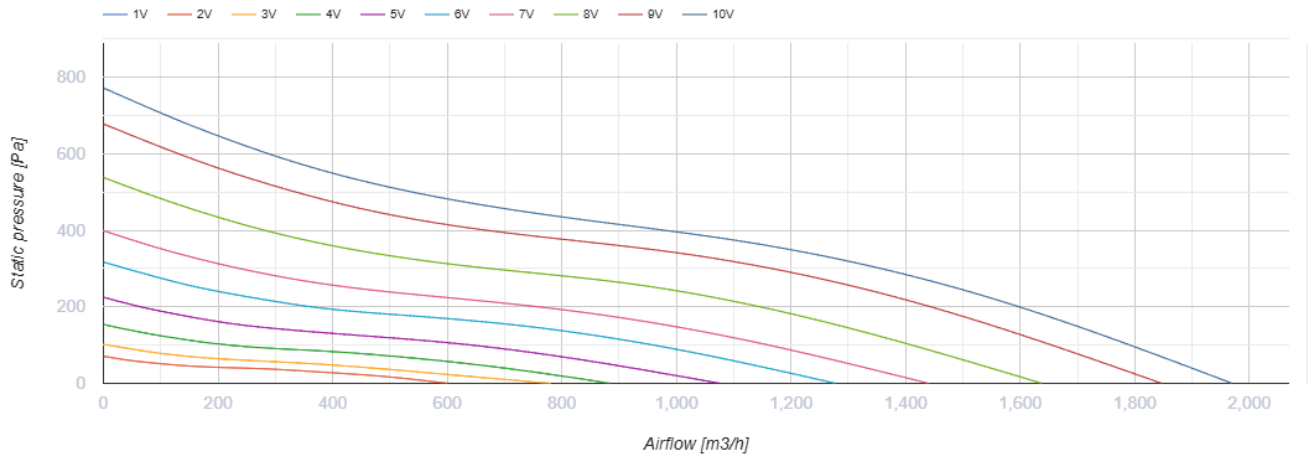

## Dimensions

| ØD  | B   | H   | L   |
|-----|-----|-----|-----|
| 309 | 360 | 423 | 443 |



## Ecodesign

|                                       |                |
|---------------------------------------|----------------|
| Trademark                             | Vents          |
| Model                                 | TT PRO 315 EC  |
| Type of drive installed               | Integrated VSD |
| Type of heat recovery system          | None           |
| Nominal flow rate (m <sup>3</sup> /s) | 0.31           |
| Nominal external pressure (Pa)        | 371            |
| Maximum external leakage rates (%)    | 2.7            |
| Static efficiency (%)                 | 46.6           |
| Declared typology                     | NRVU UVU       |
| Effective electric power input (kW)   | 0.283          |
| Sound power level (dB(A))             | 75             |