


TT Silent-M 125 EC P

Mixed-type duct fans with EC motors in casings with noise and heat insulation



- Maximum airflow: 450
- Sound pressure level LpA at 3 m: 43
- Sound insulation
- Motor type: EC
- Control: Built-in speed controller
- Impeller type: Mixed-flow
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position
- Cable with mains plug

| | Unit of measurement | TT Silent-M 125 EC P |
|-----------------------------------|---------------------|----------------------|
| Connected air duct size | mm | 125 |
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 40 |
| Unit current | A | 0.37 |
| Maximum airflow | m ³ /h | 450 |
| Sound pressure level LpA at 3 m | dB(A) | 43 |
| Weight | kg | 4.8 |
| Transported air temperature (max) | °C | 55 |
| Transported air temperature (min) | °C | -25 |
| Ingress protection rating | - | IPX4 |

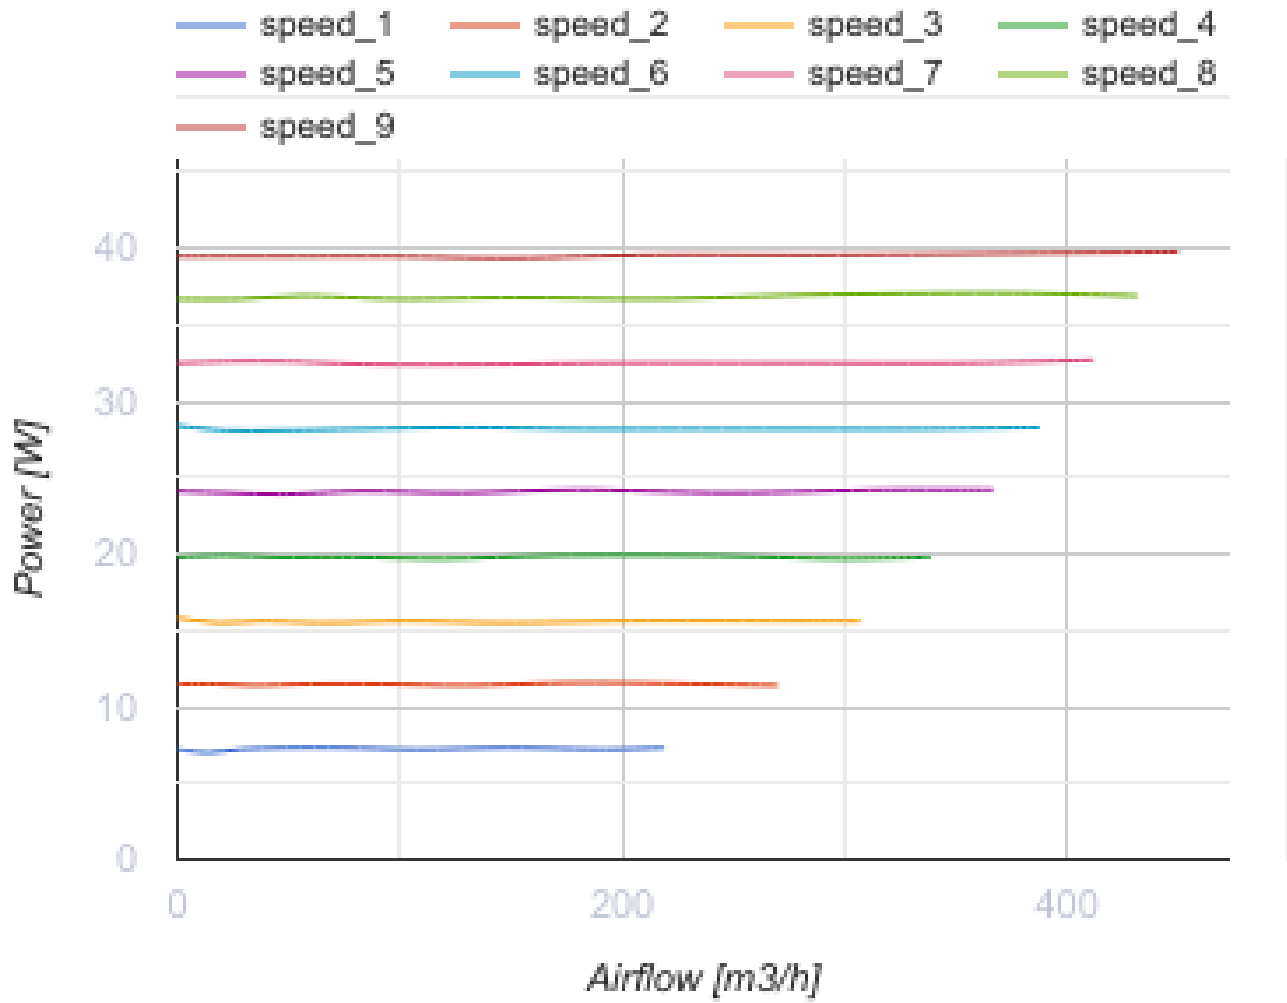

Dimensions

| ØD | B | B1 | L | H |
|-----|-----|-----|-----|-----|
| 123 | 215 | 332 | 474 | 247 |

