


TT Silent-M 150 EC Un




Mixed-flow inline fans in sound-insulated casings with EC-motors

- Maximum airflow: 600
- Sound pressure level LpA at 3 m: 38
- Sound insulation
- Motor type: EC
- Control: Built-in speed controller
- Impeller type: Mixed-flow
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position
- Cable with mains plug
- Temperature sensor

| | Unit of measurement | TT Silent-M 150 EC Un |
|-----------------------------------|---------------------|-----------------------|
| Connected air duct size | mm | 150 |
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 55 |
| Unit current | A | 0.48 |
| Maximum airflow | m ³ /h | 600 |
| Sound pressure level LpA at 3 m | dB(A) | 38 |
| Weight | kg | 6 |
| Transported air temperature (max) | °C | 55 |
| Transported air temperature (min) | °C | -25 |
| Ingress protection rating | - | IPX4 |

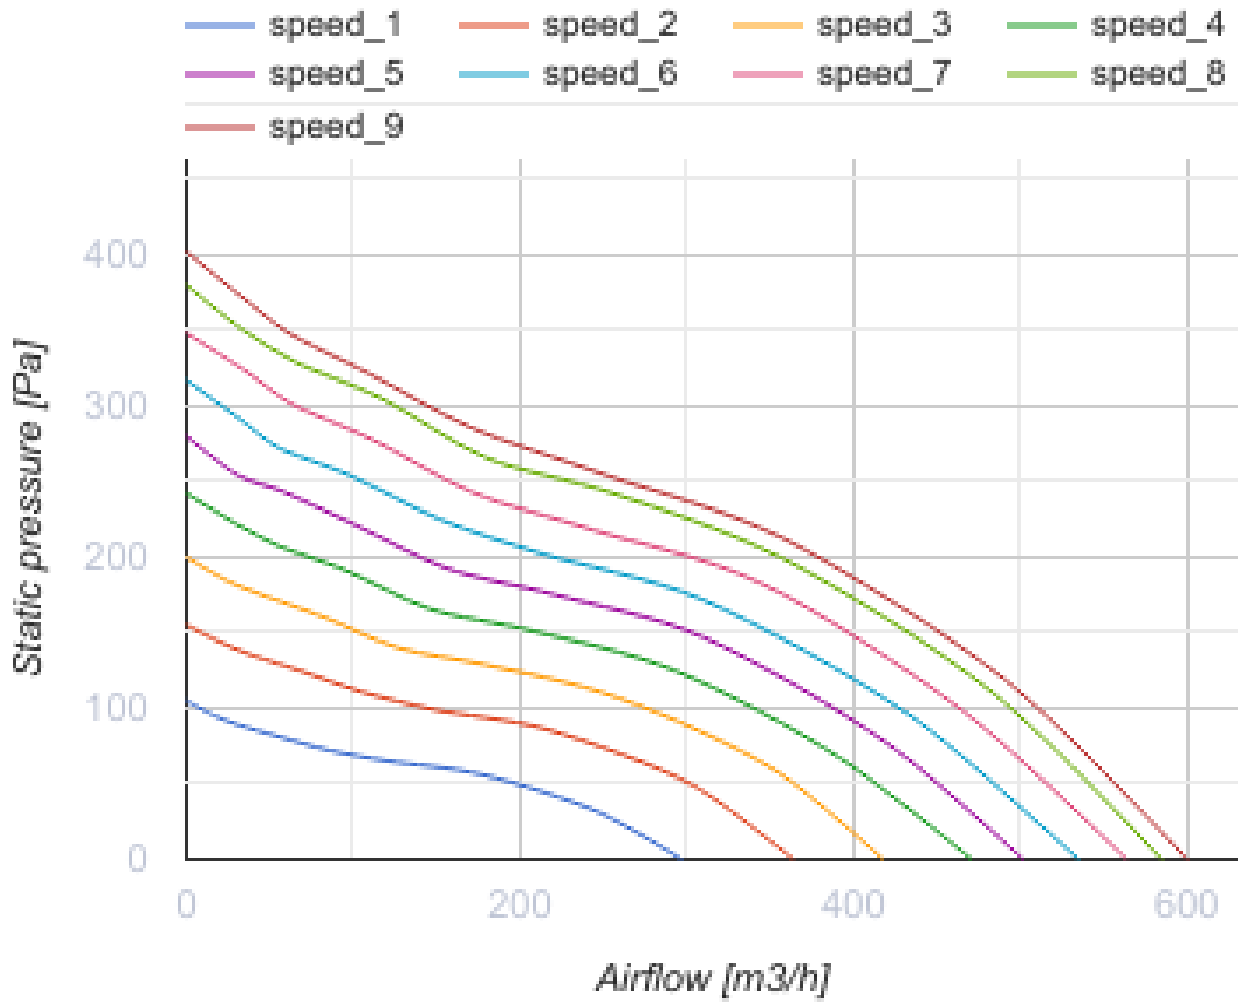

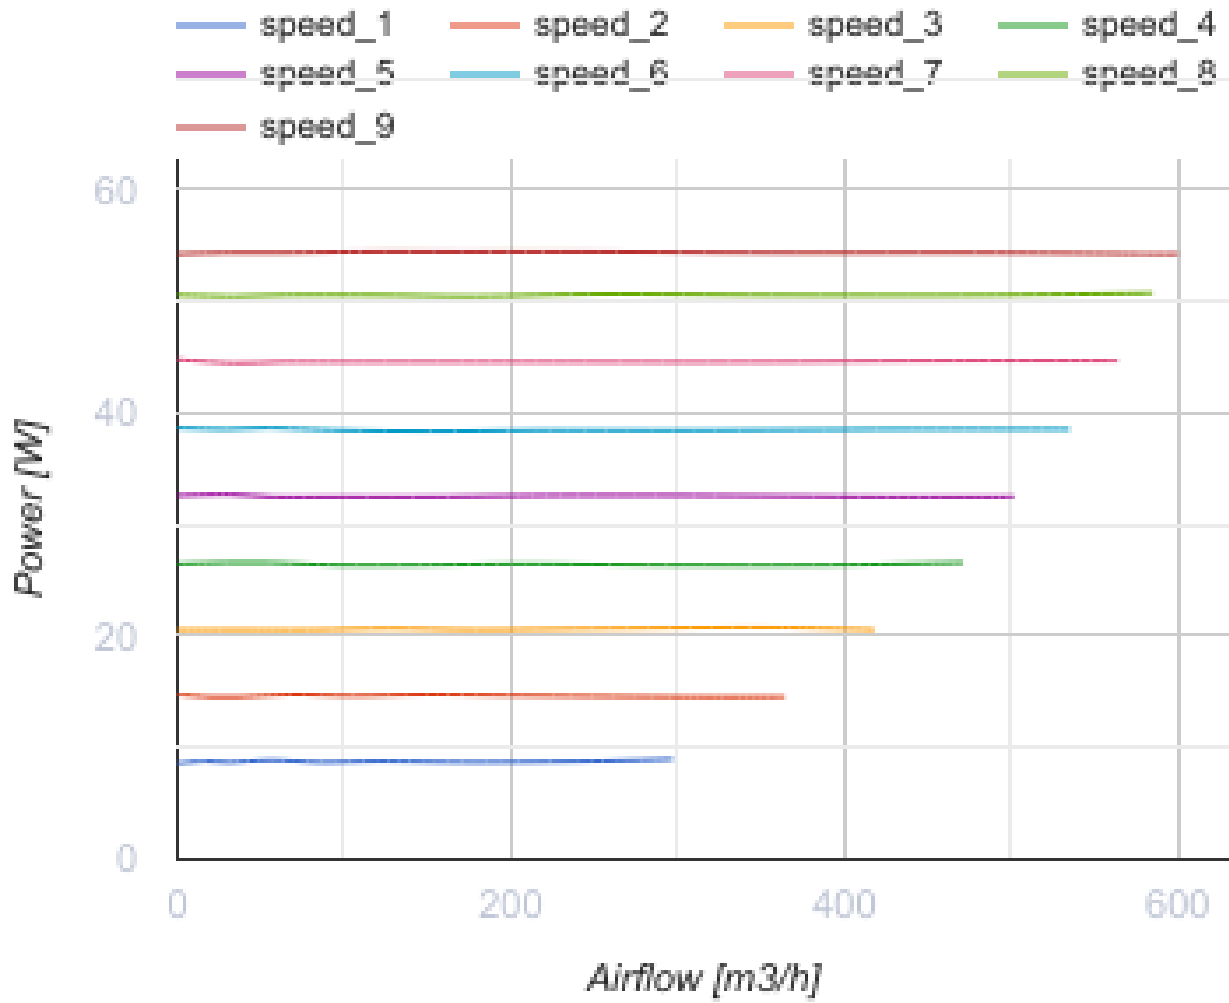

Dimensions

| ØD | B | B1 | L | H |
|-----|-----|-----|-----|-----|
| 147 | 247 | 372 | 580 | 265 |

