


# TT Silent-M 160 EC P


Mixed-type duct fans with EC motors in casings with noise and heat insulation



- Maximum airflow: 600
- Sound pressure level LpA at 3 m: 38
- Sound insulation
- Motor type: EC
- Control: Built-in speed controller
- Impeller type: Mixed-flow
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position
- Cable with mains plug

|                                   | Unit of measurement | TT Silent-M 160 EC P |
|-----------------------------------|---------------------|----------------------|
| Connected air duct size           | mm                  | 160                  |
| Speed                             | -                   | 1                    |
| Minimum supply voltage            | V                   | 230                  |
| Maximum supply voltage            | V                   | 230                  |
| Power supply frequency            | Hz                  | 50/60                |
| Rated power                       | W                   | 55                   |
| Unit current                      | A                   | 0.48                 |
| Maximum airflow                   | m <sup>3</sup> /h   | 600                  |
| Sound pressure level LpA at 3 m   | dB(A)               | 38                   |
| Weight                            | kg                  | 6                    |
| Transported air temperature (max) | °C                  | 55                   |
| Transported air temperature (min) | °C                  | -25                  |
| Ingress protection rating         | -                   | IPX4                 |

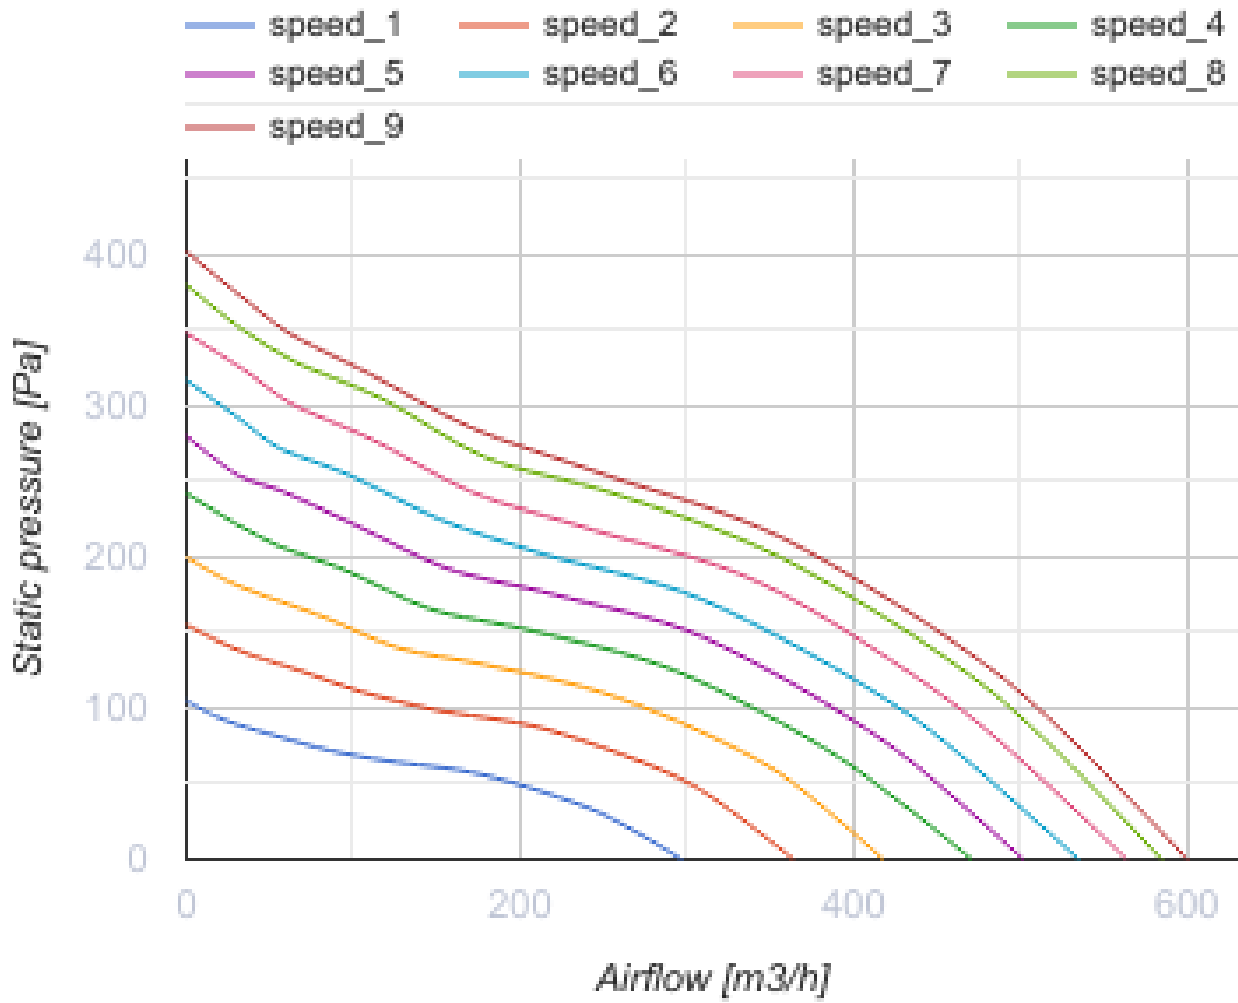

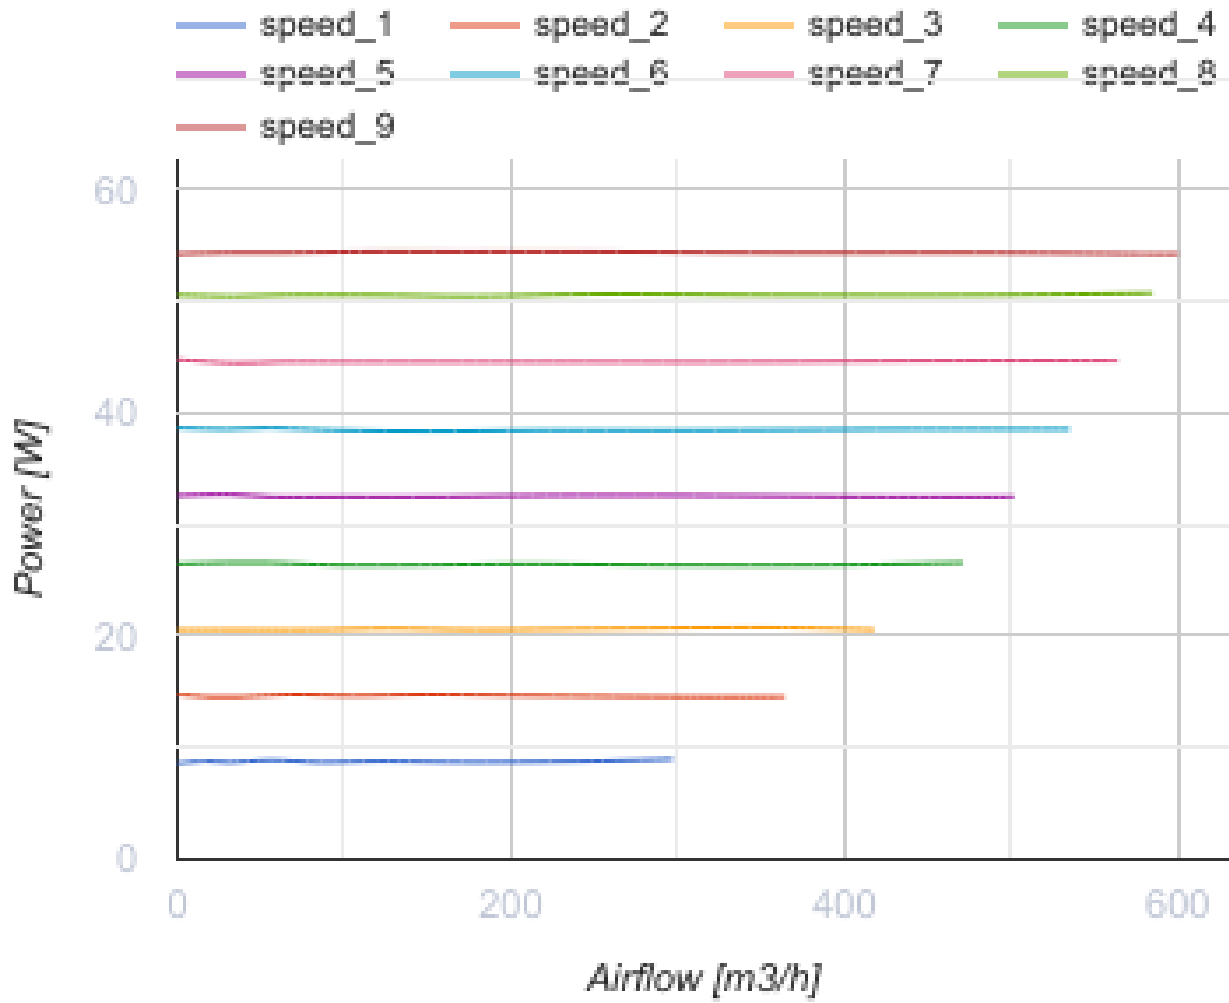

## Dimensions

| ØD  | B   | B1  | L   | H   |
|-----|-----|-----|-----|-----|
| 157 | 247 | 372 | 580 | 265 |

