



TT Silent-M 200 EC



Mixed-flow inline fans in sound-insulated casings with EC-motors


- Maximum airflow: 1040
- Sound pressure level LpA at 3 m: 43
- Sound insulation
- Motor type: EC
- Impeller type: Mixed-flow
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	TT Silent-M 200 EC
Connected air duct size	mm	200
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	123
Unit current	A	1.02
Maximum airflow	m ³ /h	1040
Sound pressure level LpA at 3 m	dB(A)	43
Weight	kg	8.6
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4

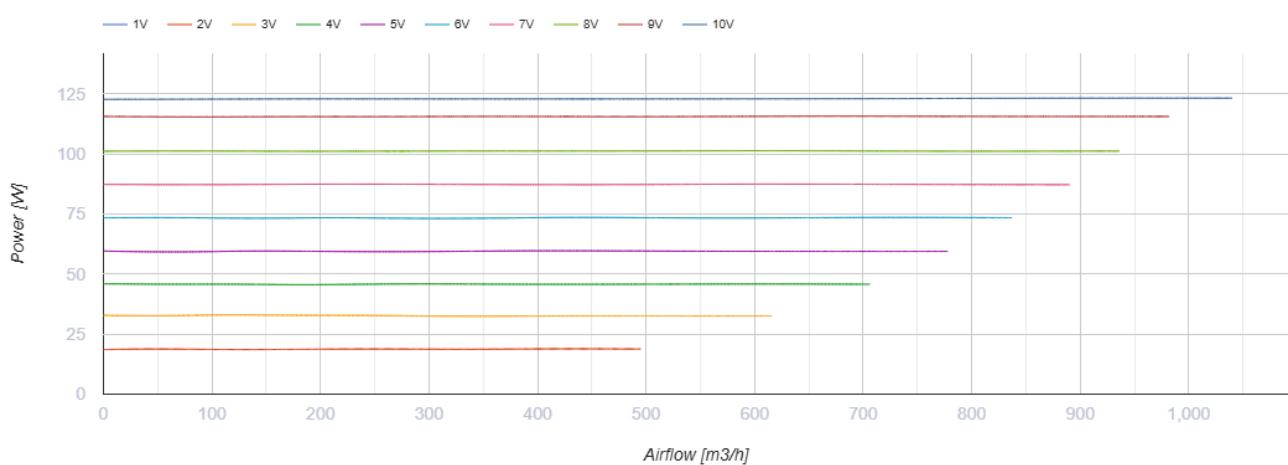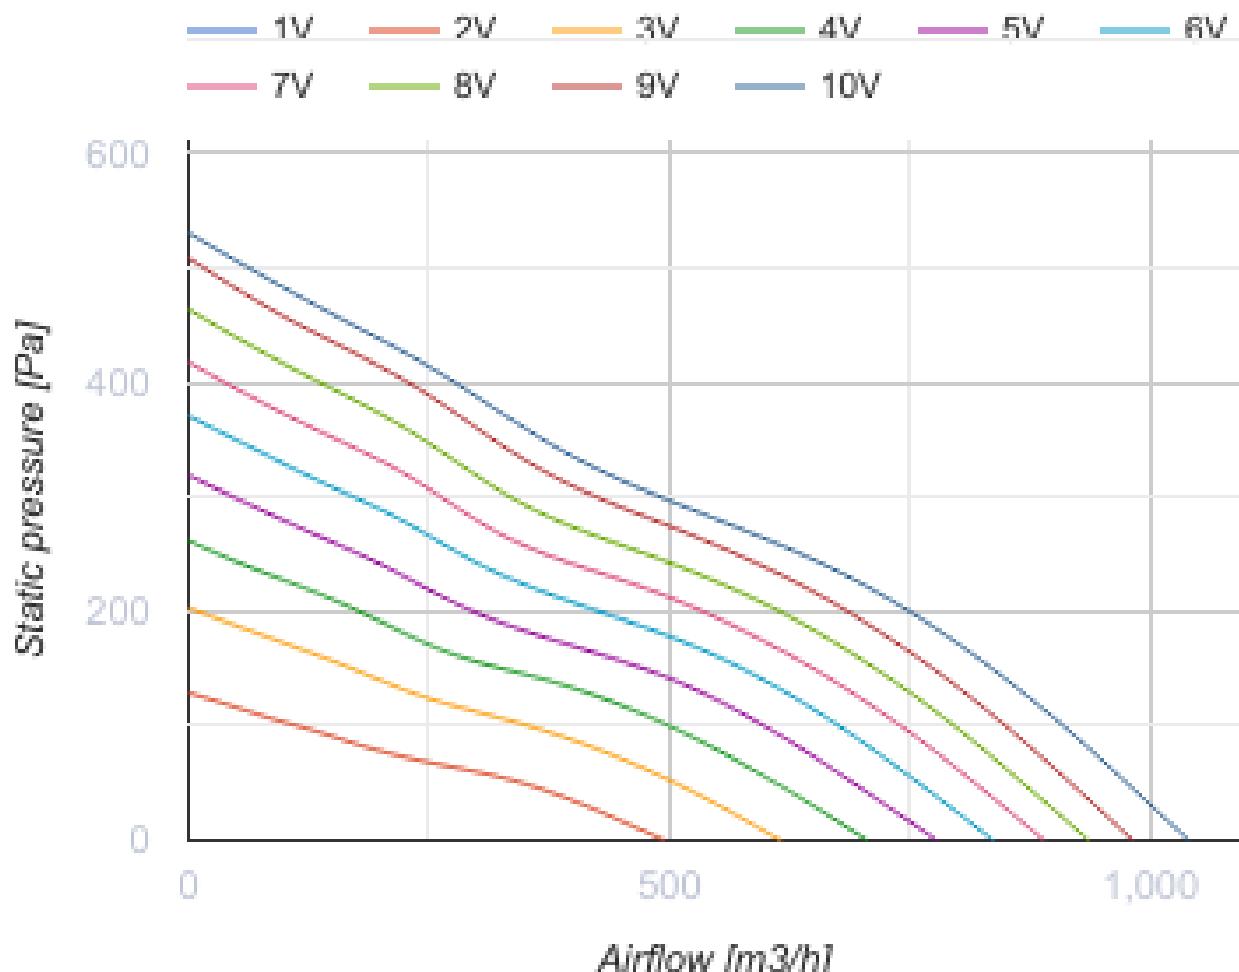


Dimensions

ØD	B	B1	L	H
198	293	392	558	311

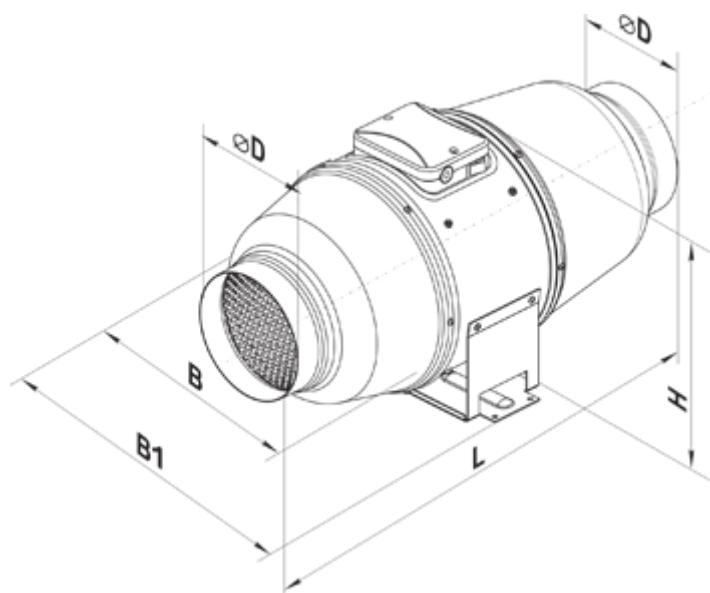

Ecodesign

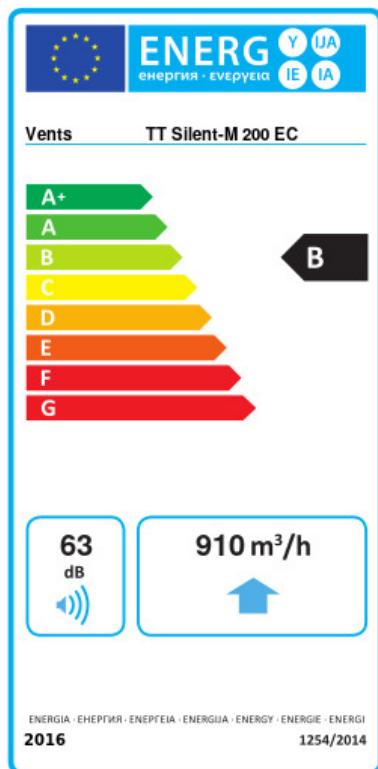

Trademark	Vents		
Model	TT Silent-M 200 EC		
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm
-54.1	A+	-27.1	B -11.6 E
Type of ventilation unit	Unidirectional		
Type of drive installed	Variable speed		
Type of heat recovery system	None		
Maximum flow rate (m ³ /h)	910		
Electric power input (W)	123		
Reference flow rate (m ³ /s)	0.177		
Reference pressure difference (Pa)	50		
Specific power input (SPI) (W/(m ³ /h))	0.094		
Control typology	Local demand control		
Maximum external leakage rates (%)	2.7		
Declared typology	RVU UVU		
Sound power level (dB(A))	63		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
50	50	50	
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
5536	2830	1280	