

# TwinFresh Style Frost



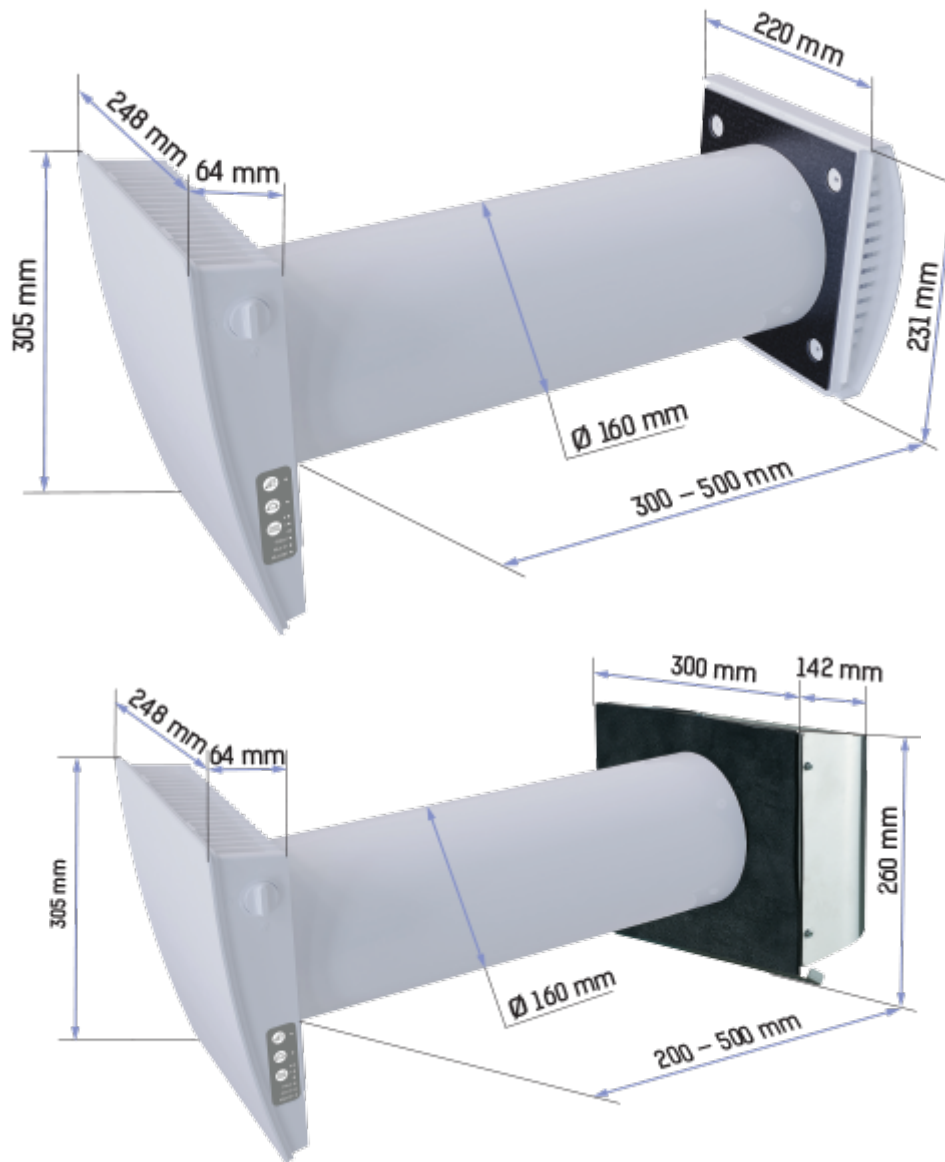
Style is a modern and efficient solution to ensure comfortable microclimate within a room and required air exchange in the renovated rooms, new, just-settled buildings or reconstructed apartments

- Air flow in heat recovery mode: 25
- Sound pressure level LpA at 3 m: 26
- Sound pressure level LpA at 1 m: 35
- Heat recovery efficiency: 90
- Heat exchanger type: Regenerative
- Filter: G3 (G4 F7 опційно)
- Sound insulation
- Motor type: EC
- Control: Built-in control panel
- Casing material: Plastic
- Humidity sensor: Optional

	Unit of measurement	TwinFresh Style Frost		
Speed	-	3		
Minimum supply voltage	V	100		
Maximum supply voltage	V	240		
Power supply frequency	Hz	50/60		
Rated power	W	2.00	3.50	5.50
Unit current	A	0.03	0.03	0.06
Air flow in ventilation mode	m <sup>3</sup> /h	15	35	50
Air flow in heat recovery mode	m <sup>3</sup> /h	8	15	25
Sound pressure level LpA at 3 m	dB(A)	1	19	26
Sound pressure level LpA at 1 m	dB(A)	10	28	35
Heat recovery efficiency	%	90		
Heat recovery efficiency, max	%	90		
Heat exchanger type	-	Regenerative		
Filter	-	G3 (G4 F7 опційно)		
Transported air temperature (max)	°C	40		
Transported air temperature (min)	°C	-30		
Ambient air temperature min	°C	1		
Ambient air temperature max	°C	40		
Ambient air humidity max	%	65		



Ingress protection rating	-	IP24
---------------------------	---	------

## Dimensions
















## Accessories

### Other accessories



Name	Photo	Description
<a href="#">EH-14 white 160</a>		Plastic outer hood
<a href="#">EH-14 chrome 160</a>		Plastic outer hood

<a href="#">MVVM 162 05</a>		Outer ventilation hood
-----------------------------	---	------------------------

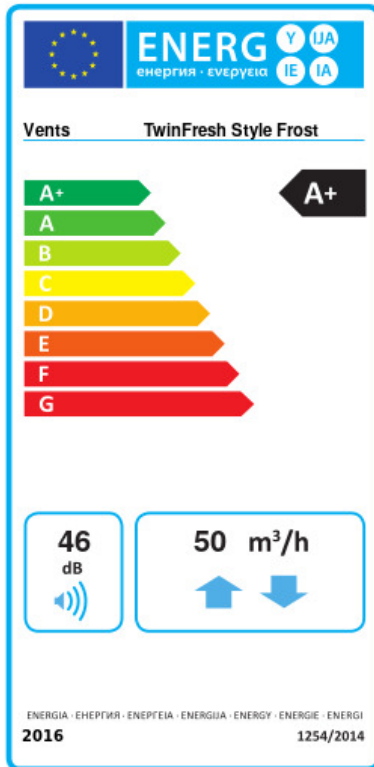
### Other accessories

Name	Photo	Description
EH-2 grey 160		Outer hood for thin walls
EH-2 chrome 160		Outer hood for thin walls
EH-13 white 160		Outer hood for cold climate
EH-13 chrome 160		Outer hood for cold climate
NP white 160		Angular mounting kit
NP chrome 160		Angular mounting kit
Duct 160-500		Air duct
Duct 160-700		Air duct
T TwinFresh Style		Cardboard template for indoor installation of the unit
RK1 TwinFresh		Remote control
SF2 TwinFresh G3		G3 filter kit (2 pcs.)
SF2 TwinFresh G4		Coarse filter G4 Contents: • plastic filter holder (1 pc.) • G4 filter (1 pc.)
SF2 TwinFresh F7		Fine filter F7 Contents: • plastic filter holder (1 pc.) • F7 filter (1 pc.) The F7 filter reduces air flow to 40 m³/h

### Sensors

Name	Photo	Description
<a href="#">CO2-1</a>		CO2 sensors
<a href="#">CO2-2</a>		CO2 sensors

## Ecodesign



Trademark	Vents					
Model	TwinFresh Style Frost					
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold		Average		Warm	
	-86.1	A+	-43.1	A+	-18.5	E
Type of ventilation unit	Bidirectional					
Type of drive installed	3-speed					
Type of heat recovery system	Regenerative					
Thermal efficiency of heat recovery (%)	82					
Maximum flow rate (m <sup>3</sup> /h)	50					
Electric power input (W)	5.5					
Reference flow rate (m <sup>3</sup> /s)	0.01					
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.1					
Control typology	Local demand control					
Airflow sensitivity at +20 Pa and -20 Pa (%)	0.24					
The indoor/outdoor air tightness (m <sup>3</sup> /h)	2.9					
Declared typology	RVU BVU					
Sound power level (dB(A))	46					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	72		72		72	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	88		45		20	