

# TwinFresh Style Frost Wi-Fi



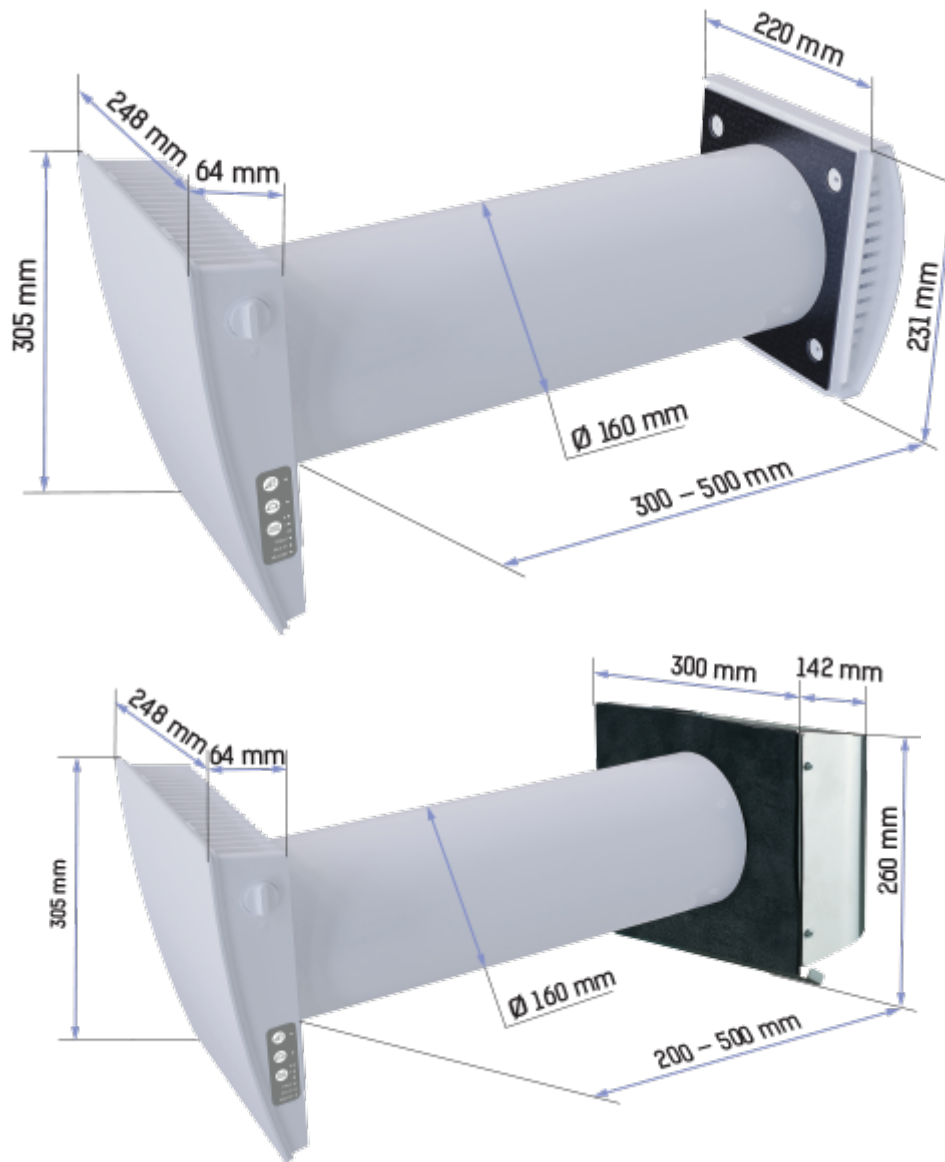
Style WiFi is an up-to-date and efficient solution to create a comfortable indoor climate and air exchange in refurbished premises, recently settled houses or renovated flats

- Air flow in heat recovery mode: 25
- Sound pressure level LpA at 3 m: 26
- Sound pressure level LpA at 1 m: 35
- Heat recovery efficiency: 90
- Heat exchanger type: Regenerative
- Filter: G3 (G4 F7 optional)
- Sound insulation
- Motor type: EC
- Control: Smartphone
- Casing material: Plastic
- Humidity sensor: Optional

|                                   | Unit of measurement | TwinFresh Style Frost Wi-Fi |      |      |
|-----------------------------------|---------------------|-----------------------------|------|------|
| Speed                             | -                   | 3                           |      |      |
| Minimum supply voltage            | V                   | 100                         |      |      |
| Maximum supply voltage            | V                   | 240                         |      |      |
| Power supply frequency            | Hz                  | 50/60                       |      |      |
| Rated power                       | W                   | 2.00                        | 3.50 | 5.50 |
| Unit current                      | A                   | 0.03                        | 0.03 | 0.06 |
| Air flow in ventilation mode      | m <sup>3</sup> /h   | 15                          | 35   | 50   |
| Air flow in heat recovery mode    | m <sup>3</sup> /h   | 8                           | 15   | 25   |
| Sound pressure level LpA at 3 m   | dB(A)               | 1                           | 19   | 26   |
| Sound pressure level LpA at 1 m   | dB(A)               | 10                          | 28   | 35   |
| Heat recovery efficiency          | %                   | 90                          |      |      |
| Heat recovery efficiency, max     | %                   | 90                          |      |      |
| Heat exchanger type               | -                   | Regenerative                |      |      |
| Filter                            | -                   | G3 (G4 F7 optional)         |      |      |
| Transported air temperature (max) | °C                  | 40                          |      |      |
| Transported air temperature (min) | °C                  | -30                         |      |      |
| Ambient air temperature min       | °C                  | 1                           |      |      |
| Ambient air temperature max       | °C                  | 40                          |      |      |
| Ambient air humidity max          | %                   | 65                          |      |      |



|                           |   |      |
|---------------------------|---|------|
| Ingress protection rating | - | IP24 |
|---------------------------|---|------|

## Dimensions
















## Accessories

### Other accessories



| Name                             | Photo   | Description        |
|----------------------------------|---|--------------------|
| <a href="#">EH-14 white 160</a>  |  | Plastic outer hood |
| <a href="#">EH-14 chrome 160</a> |  | Plastic outer hood |

|                             |   |                        |
|-----------------------------|---|------------------------|
| <a href="#">MVVM 162 05</a> |  | Outer ventilation hood |
|-----------------------------|---|------------------------|

### Other accessories

| Name              | Photo   | Description  |
|-------------------|---|--|
| EH-2 grey 160     |    | Outer hood for thin walls  |
| EH-2 chrome 160   |    | Outer hood for thin walls  |
| EH-13 white 160   |    | Outer hood for cold climate  |
| EH-13 chrome 160  |    | Outer hood for cold climate  |
| NP white 160      |   | Angular mounting kit   |
| NP chrome 160     |  | Angular mounting kit   |
| Duct 160-500      |  | Air duct   |
| Duct 160-700      |  | Air duct   |
| T TwinFresh Style |  | Cardboard template for indoor installation of the unit   |
| RK1 TwinFresh     |  | Remote control   |
| SF2 TwinFresh G3  |  | G3 filter kit (2 pcs.)   |
| SF2 TwinFresh G4  |  | Coarse filter G4 Contents: • plastic filter holder (1 pc.) • G4 filter (1 pc.)   |
| SF2 TwinFresh F7  |  | Fine filter F7 Contents: • plastic filter holder (1 pc.) • F7 filter (1 pc.) The F7 filter reduces air flow to 40 m³/h |

### Sensors

| Name                  | Photo   | Description |
|-----------------------|---|-------------|
| <a href="#">CO2-1</a> |  | CO2 sensors |
| <a href="#">CO2-2</a> |  | CO2 sensors |