


# VCN 100



Exhaust centrifugal fans in steel casing for outdoor surface mounting


- Maximum airflow: 325
- Sound pressure level LpA at 3 m: 54
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	VCN 100
Connected air duct size	mm	100
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	71
Unit current	A	0.31
Maximum airflow	m <sup>3</sup> /h	325
Sound pressure level LpA at 3 m	dB(A)	54
Weight	kg	3.82
Transported air temperature (max)	°C	55
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

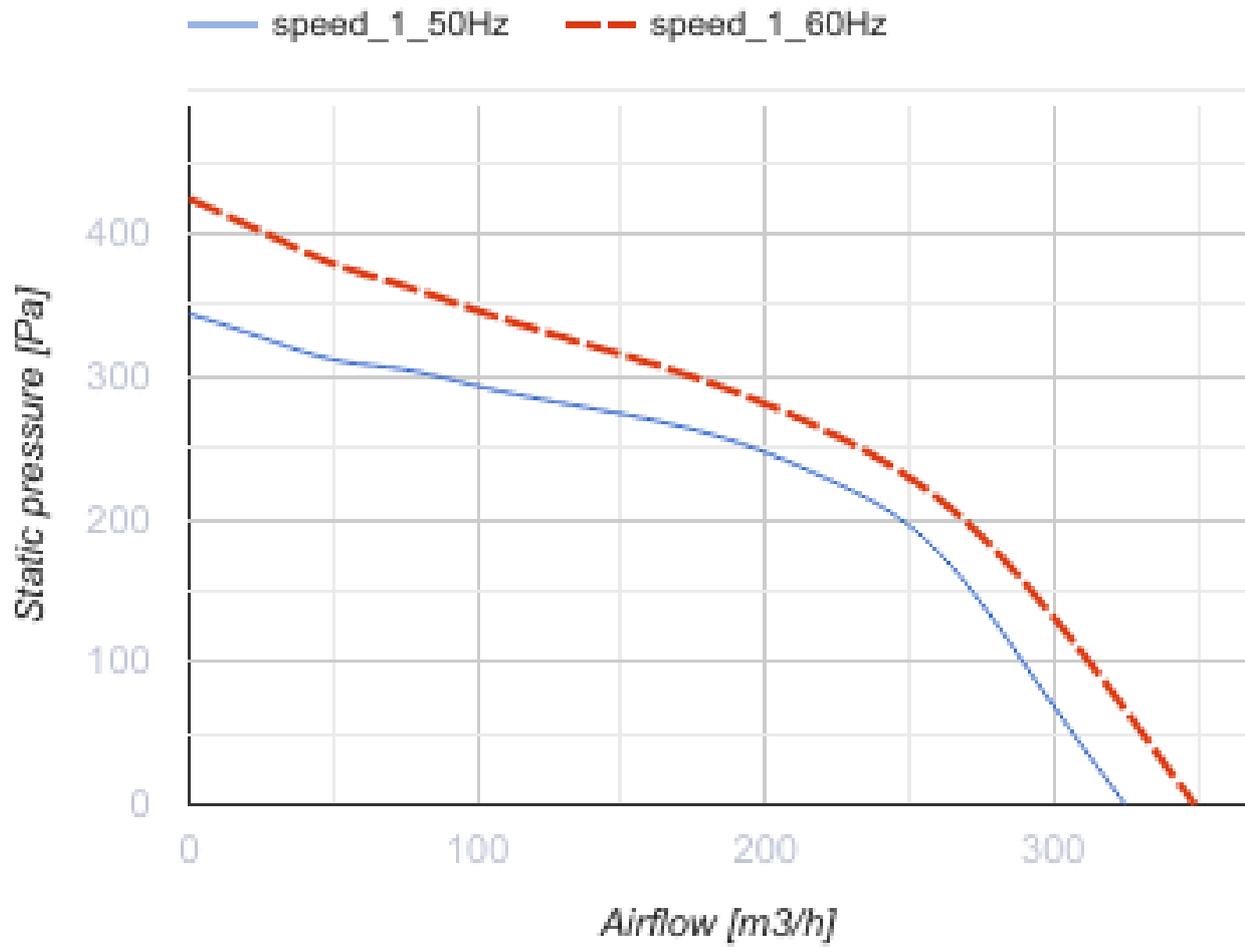


## Dimensions

$\varnothing D$	B	H	L
99	260	355	138

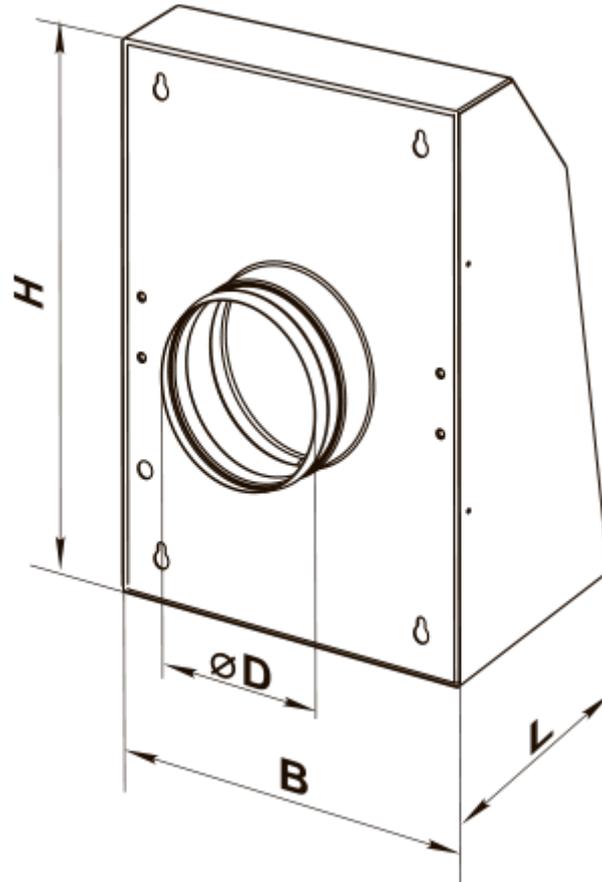

## Ecodesign

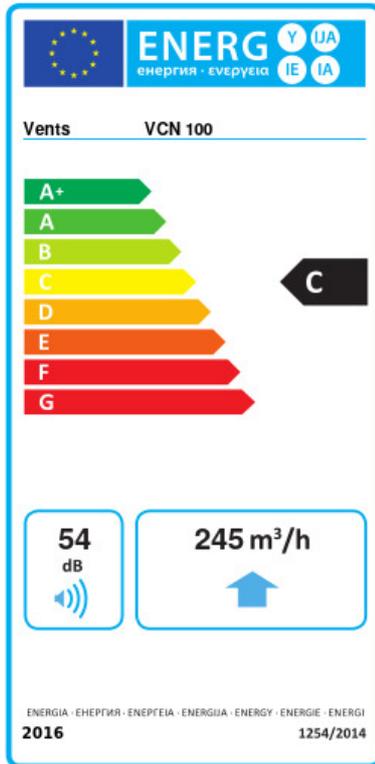

Trademark	Vents					
Model	VCN 100					
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold		Average		Warm	
	-52.9	A+	-25.8	C	-10.3	E
Type of ventilation unit	Unidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	None					
Maximum flow rate (m <sup>3</sup> /h)	245					
Electric power input (W)	58					
Reference flow rate (m <sup>3</sup> /s)	0.048					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.186					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	54					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	98		98		98	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	5536		2830		1280	