



VCN 125 K



Exhaust centrifugal fans in steel casing for outdoor surface mounting

- Maximum airflow: 485
- Sound pressure level LpA at 3 m: 54
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position

| | Unit of measurement | VCN 125 K |
|--|---------------------|-----------|
| Connected air duct size | mm | 125 |
| Speed | - | 1 |
| Minimum supply voltage | V | 230 |
| Maximum supply voltage | V | 230 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 75 |
| Unit current | A | 0.33 |
| Maximum airflow | m ³ /h | 485 |
| Sound pressure level LpA at 3 m | dB(A) | 54 |
| Weight | kg | 3.82 |
| Transported air temperature (max) | °C | 55 |
| Ingress protection rating | - | IPX4 |
| Ingress protection rating of the drive | - | IP44 |

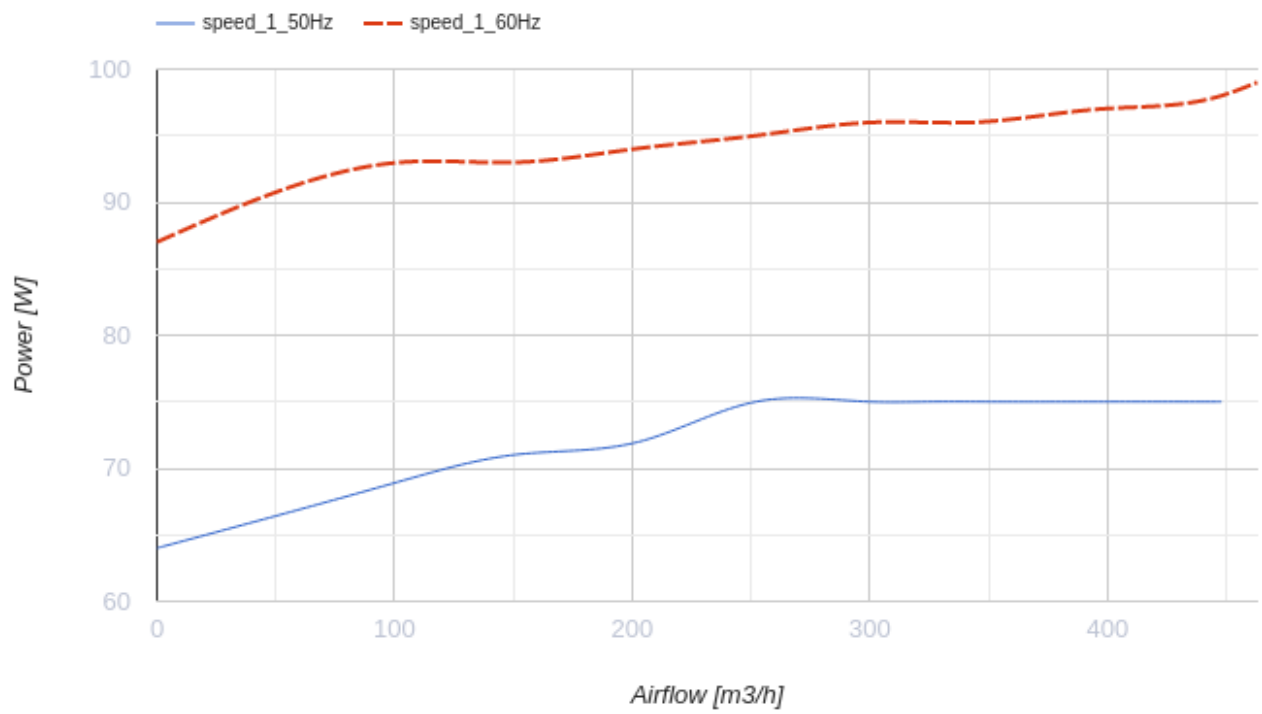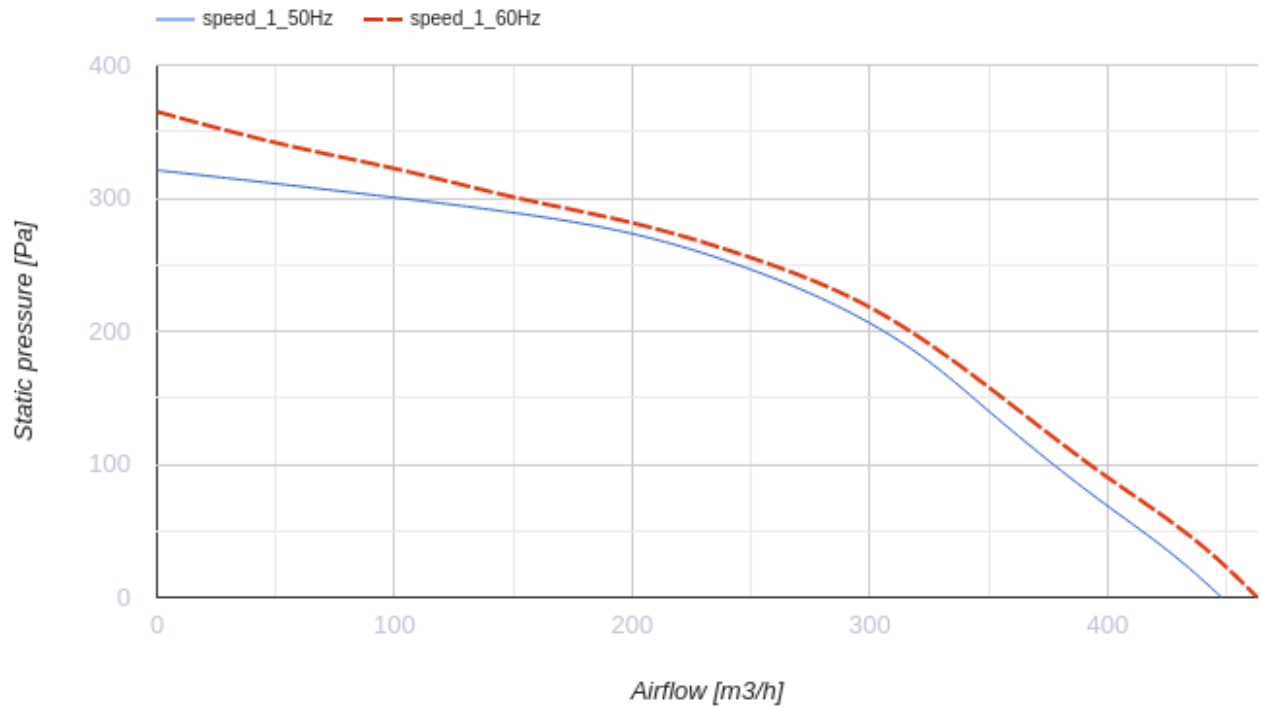

Dimensions

| ØD | B | H | L |
|-----|-----|-----|-----|
| 124 | 260 | 355 | 138 |

