


# VCUN 450x203-4,0-6 R90

Scroll single-inlet centrifugal fans with the impeller mounted directly on the three phase asynchronous motor shaft. The fan is designed for supply and exhaust ventilation systems

- Maximum airflow: 11150
- Sound pressure level LpA at 3 m: 76
- Motor type: AC
- Impeller type: Centrifugal forward curved blades
- Casing material: Coated steel

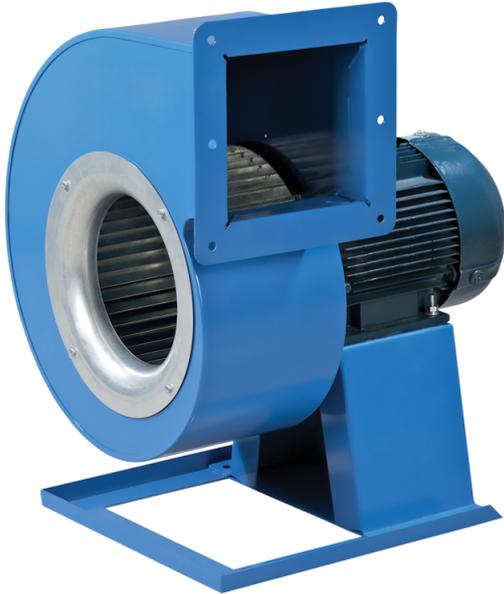

	Unit of measurement	VCUN 450x203-4,0-6 R90
Speed	-	1
Minimum supply voltage	V	400
Maximum supply voltage	V	400
Power supply frequency	Hz	50
Rated power	W	4000
Unit current	A	9.1
Maximum airflow	m <sup>3</sup> /h	11150
Sound pressure level LpA at 3 m	dB(A)	76
Weight	kg	76.5
Transported air temperature (max)	°C	60
Ingress protection rating	-	IP54
Ingress protection rating of the drive	-	IP54

## Dimensions

ØD	Ød	Ød1	B	H	H1	H2	H3	L	L1	L2	P	M	I	G	K	S
450	10	15	774	985	345	306	464	690	352	315	351	450	550	42	530	140

