



VK 125 P





Inline centrifugal fans in plastic casing

- Maximum airflow: 340
- Sound pressure level LpA at 3 m: 40
- Motor type: AC
- Control: Built-in speed controller
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Plastic
- Installation in any position
- Cable with mains plug

	Unit of measurement	VK 125 P	
Connected air duct size	mm	125	
Speed	-	1	
Phases	-	1	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50	60
Rated power	W	63	
Unit current	A	0.29	
Maximum airflow	m ³ /h	340	
Sound pressure level LpA at 3 m	dB(A)	40	
Weight	kg	2.2	
Transported air temperature (max)	°C	55	
Transported air temperature (min)	°C	-25	
Ingress protection rating	-	IPX4	

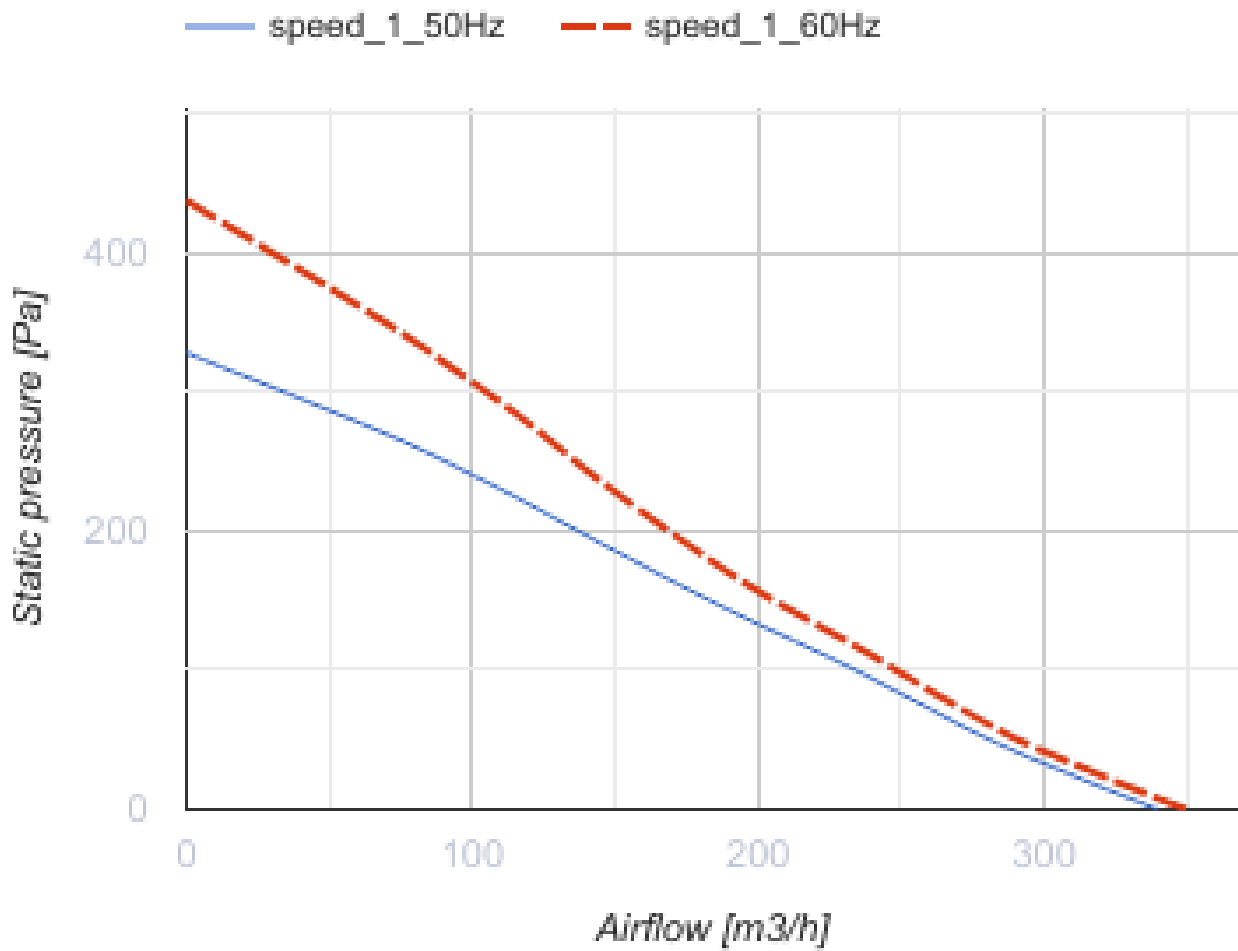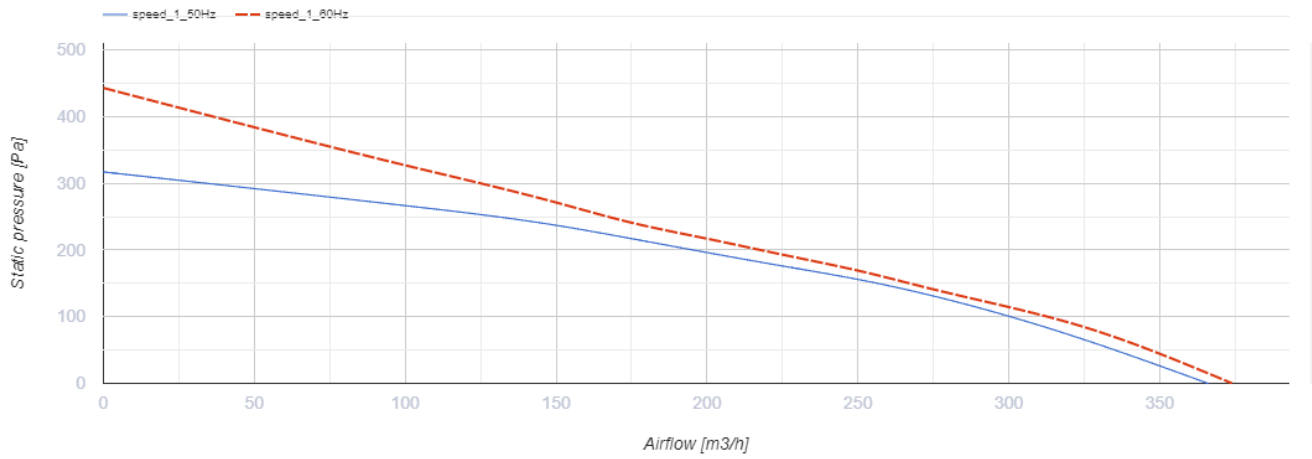

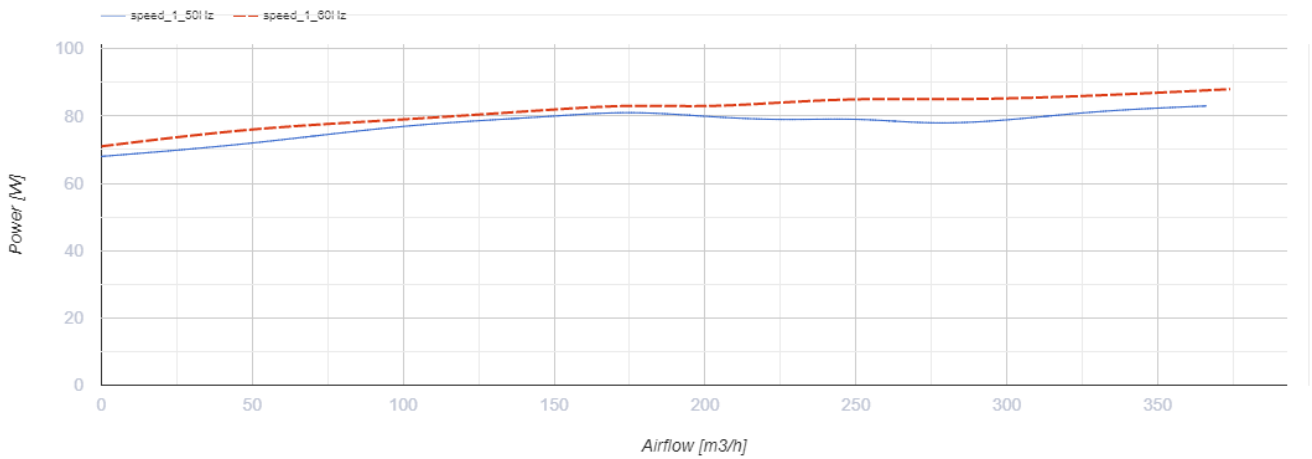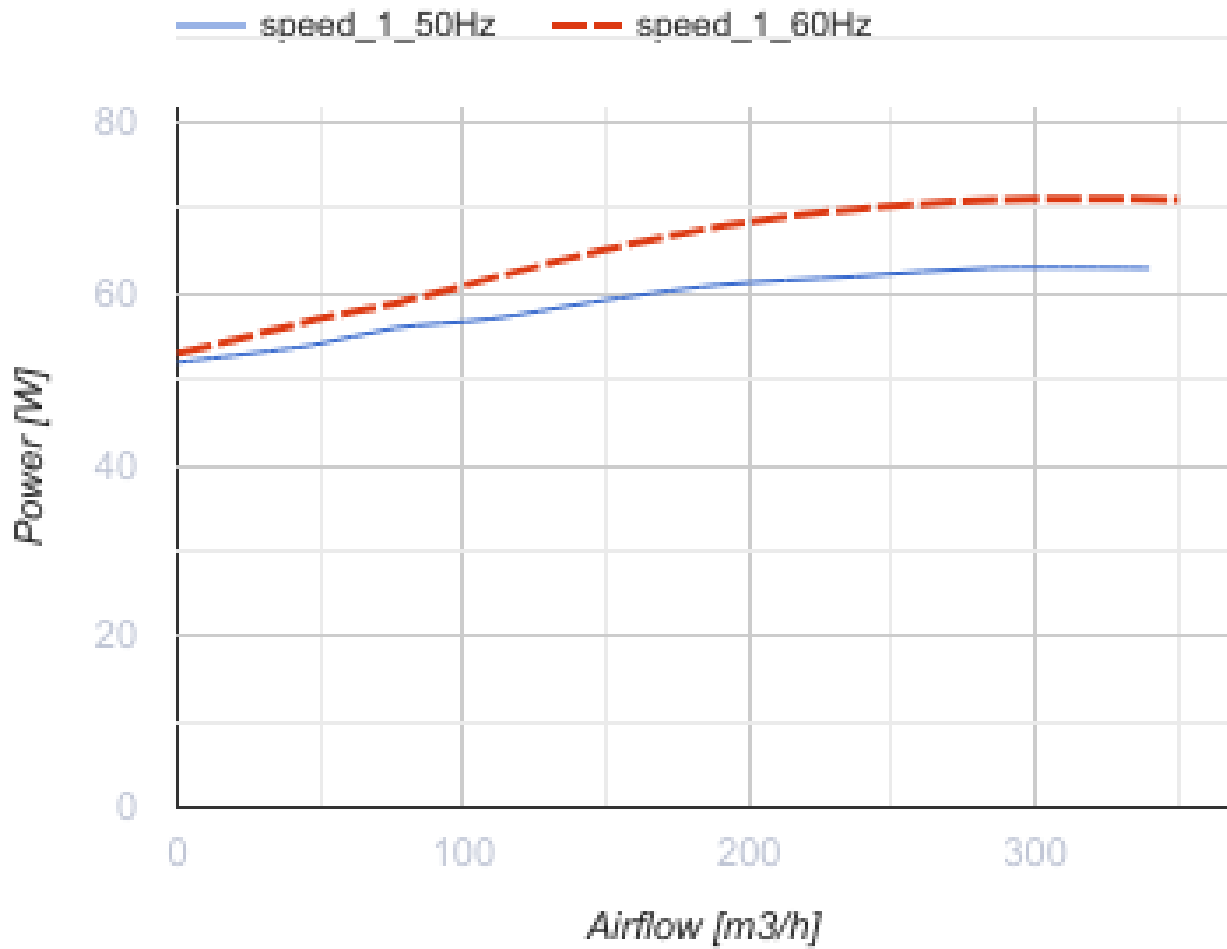

Dimensions

ØD	ØD1	B	L	L1	L2	L3
125	250	270	220	30	27	30



