


## VK 150 EC Un



Inline centrifugal fans in plastic casing

- Maximum airflow: 630
- Sound pressure level LpA at 3 m: 45
- Motor type: EC
- Control: Built-in speed controller
- Impeller type: Centrifugal backward curved blades
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position
- Cable with mains plug
- Temperature sensor

|  | Unit of measurement | VK 150 EC Un |
|--|---------------------|--------------|
| Connected air duct size                | mm                  | 160/150      |
| Speed                                  | -                   | 1            |
| Minimum supply voltage                 | V                   | 230          |
| Maximum supply voltage                 | V                   | 230          |
| Power supply frequency                 | Hz                  | 50/60        |
| Rated power                            | W                   | 82           |
| Unit current                           | A                   | 0.63         |
| Maximum airflow                        | m <sup>3</sup> /h   | 630          |
| Sound pressure level LpA at 3 m        | dB(A)               | 45           |
| Weight                                 | kg                  | 2.5          |
| Transported air temperature (max)      | °C                  | 60           |
| Transported air temperature (min)      | °C                  | -25          |
| Ingress protection rating              | -                   | IPX4         |
| Ingress protection rating of the drive | -                   | IP55         |

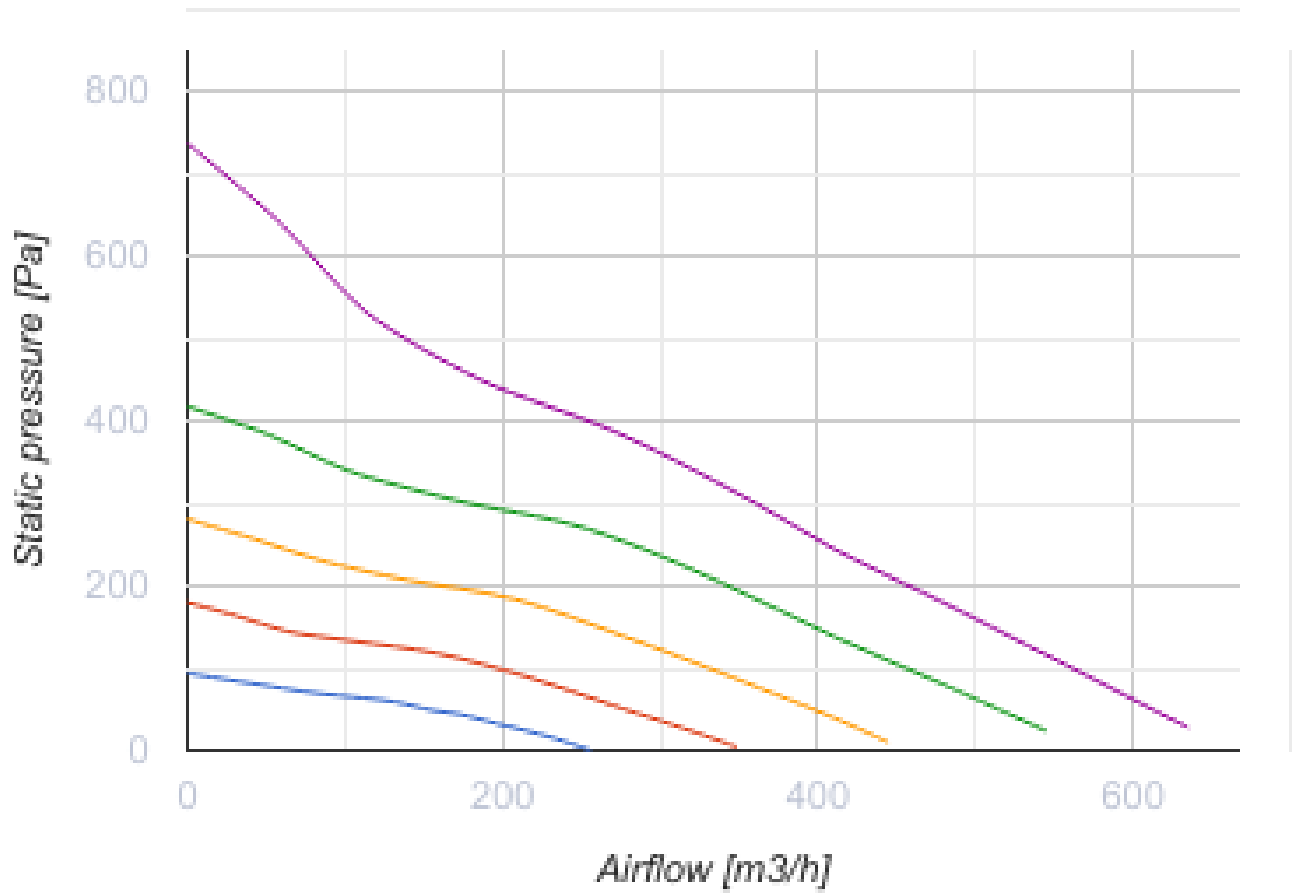

## Dimensions

| ØD  | ØD1 | B   | L   | L1 | L2 | L3 |
|-----|-----|-----|-----|----|----|----|
| 150 | 300 | 310 | 286 | 30 | 30 | 30 |

