


## VK 315 EC U



Inline centrifugal fans in plastic casing

- Maximum airflow: 1500
- Sound pressure level LpA at 3 m: 48
- Motor type: EC
- Control: Built-in speed controller
- Impeller type: Centrifugal backward curved blades
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position
- Cable with mains plug
- Temperature sensor

|  | Unit of measurement | VK 315 EC U |
|--|---------------------|-------------|
| Connected air duct size                | mm                  | 315         |
| Speed                                  | -                   | 1           |
| Minimum supply voltage                 | V                   | 230         |
| Maximum supply voltage                 | V                   | 230         |
| Power supply frequency                 | Hz                  | 50/60       |
| Rated power                            | W                   | 165         |
| Unit current                           | A                   | 1.15        |
| Maximum airflow                        | m <sup>3</sup> /h   | 1500        |
| Sound pressure level LpA at 3 m        | dB(A)               | 48          |
| Weight                                 | kg                  | 4.9         |
| Transported air temperature (max)      | °C                  | 60          |
| Transported air temperature (min)      | °C                  | -25         |
| Ingress protection rating              | -                   | IPX4        |
| Ingress protection rating of the drive | -                   | IP55        |

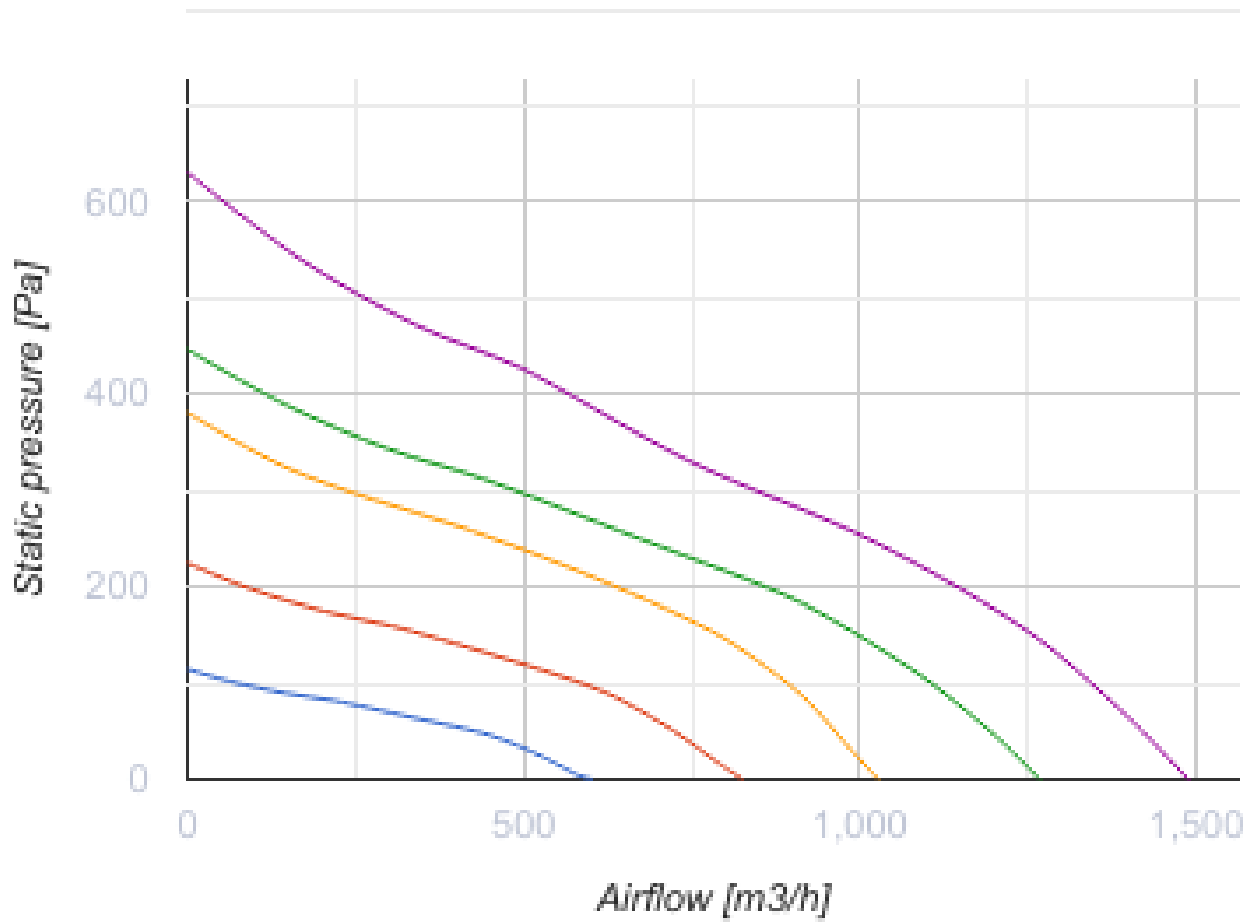

### Dimensions

| ØD  | ØD1 | B   | L   | L1 | L2 | L3 |
|-----|-----|-----|-----|----|----|----|
| 315 | 400 | 414 | 276 | 40 | 55 | 40 |

