


## VK 315 Un





Inline centrifugal fans in plastic casing

- Maximum airflow: 1240
- Sound pressure level LpA at 3 m: 49
- Motor type: AC
- Control: Built-in speed controller
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Plastic
- Installation in any position
- Cable with mains plug
- Temperature sensor

|                                   | Unit of measurement | VK 315 Un |    |
|-----------------------------------|---------------------|-----------|----|
| Connected air duct size           | mm                  | 315       |    |
| Speed                             | -                   | 1         |    |
| Phases                            | -                   | 1         |    |
| Minimum supply voltage            | V                   | 230       |    |
| Maximum supply voltage            | V                   | 230       |    |
| Power supply frequency            | Hz                  | 50        | 60 |
| Rated power                       | W                   | 169       |    |
| Unit current                      | A                   | 0.74      |    |
| Maximum airflow                   | m <sup>3</sup> /h   | 1240      |    |
| Sound pressure level LpA at 3 m   | dB(A)               | 49        |    |
| Weight                            | kg                  | 4.85      |    |
| Transported air temperature (max) | °C                  | 50        |    |
| Transported air temperature (min) | °C                  | -25       |    |
| Ingress protection rating         | -                   | IPX4      |    |

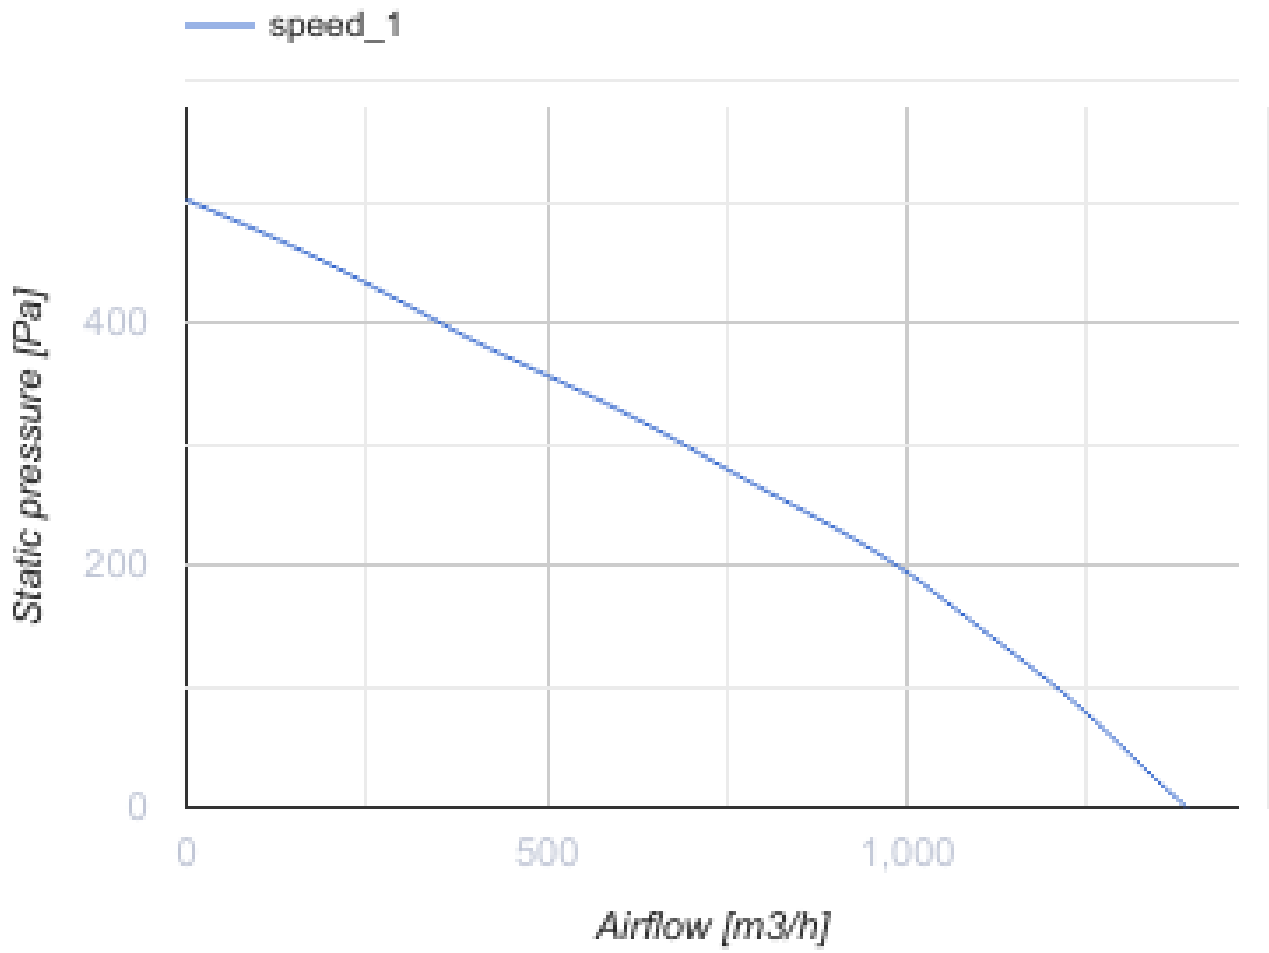


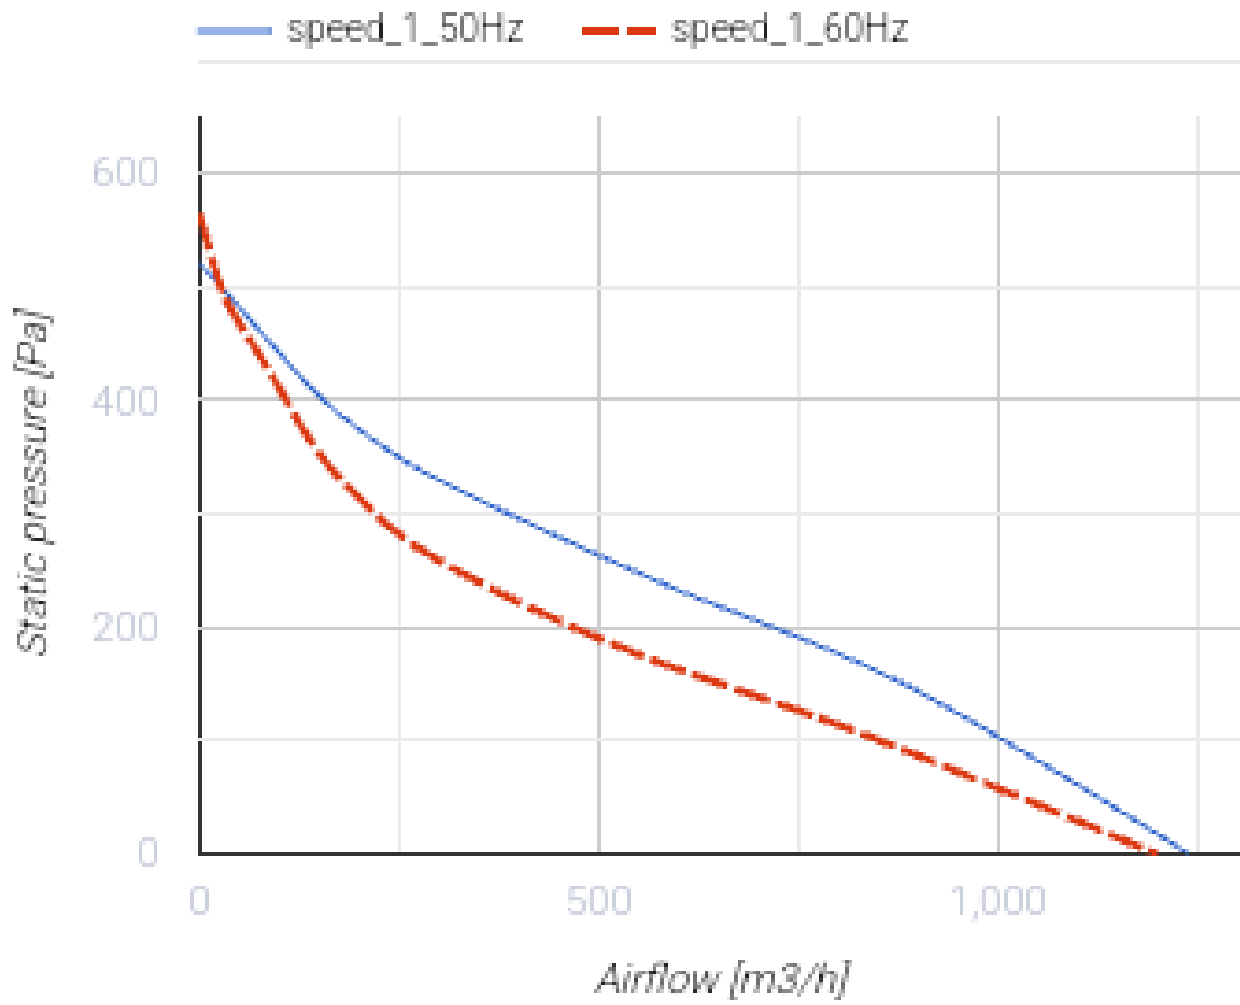

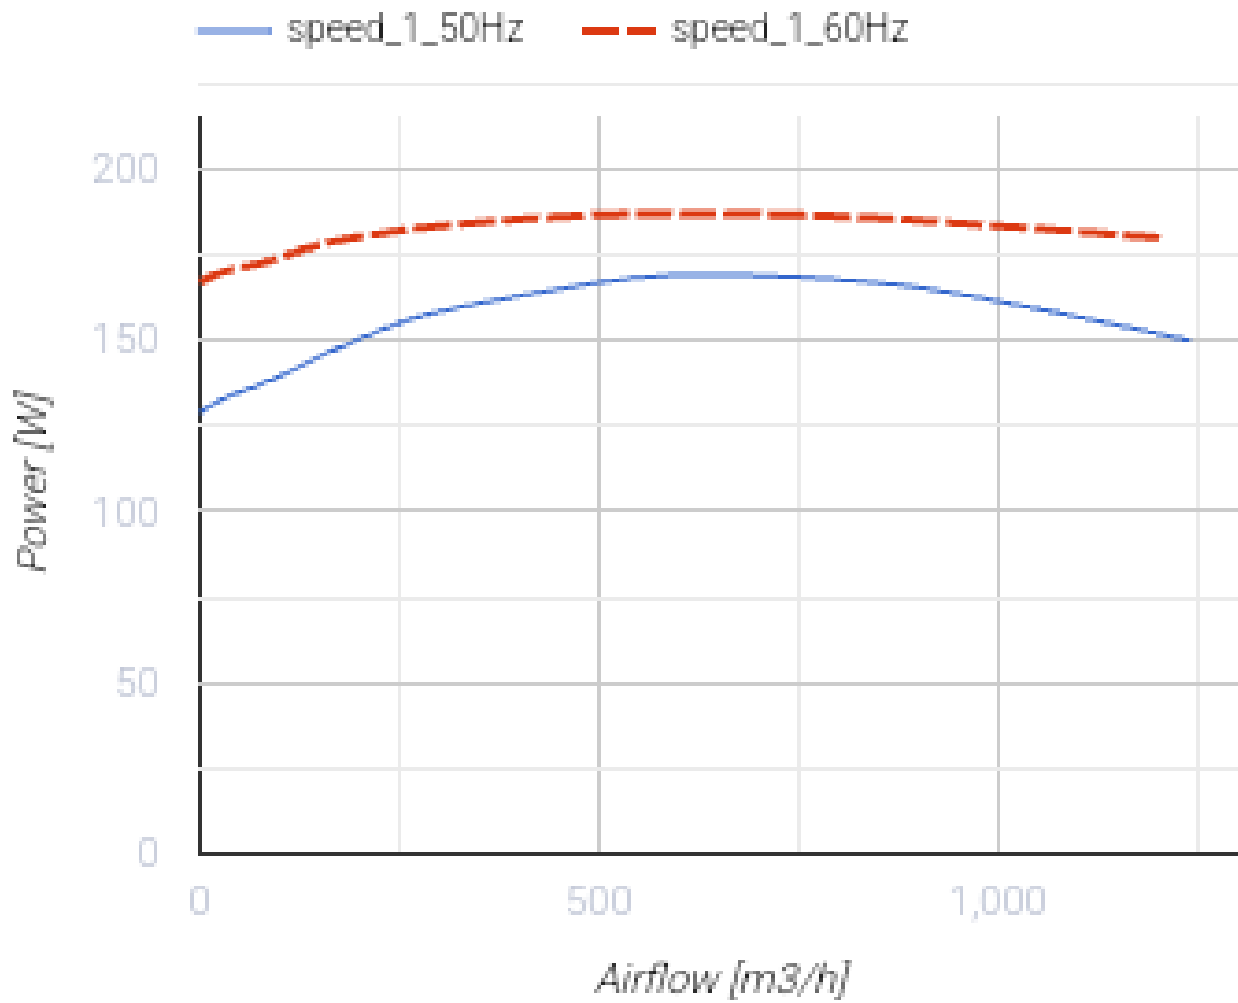

## Dimensions

| ØD  | ØD1 | B   | L   | L1 | L2 | L3 |
|-----|-----|-----|-----|----|----|----|
| 315 | 400 | 414 | 276 | 40 | 55 | 40 |

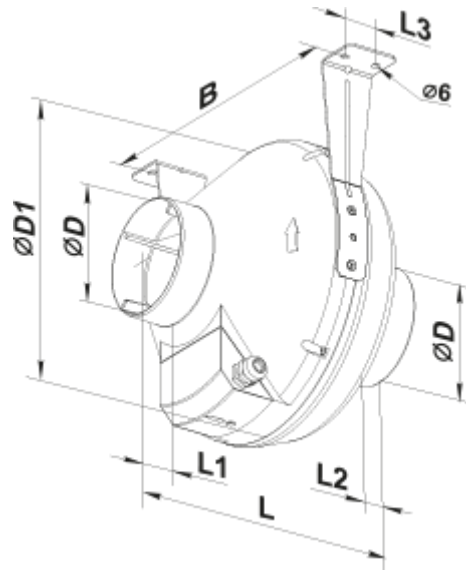

## Ecodesign

| Trademark                             | Vents               |
|---------------------------------------|---------------------|
| Model                                 | VK 315 Un           |
| Type of drive installed               | External MSD or VSD |
| Type of heat recovery system          | None                |
| Nominal flow rate (m <sup>3</sup> /s) | 0.242               |
| Nominal external pressure (Pa)        | 237                 |
| Maximum external leakage rates (%)    | 2.7                 |
| Static efficiency (%)                 | 30.2                |
| Declared typology                     | NRVU UVU            |
| Effective electric power input (kW)   | 0.194               |
| Sound power level (dB(A))             | 70                  |