



VKF 4E 630



Low pressure axial fans in the steel casing with for wall mounting

- Maximum airflow: 11900
- Sound pressure level LpA at 3 m: 67
- Motor type: AC
- Impeller type: Axial
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

| | Unit of measurement | VKF 4E 630 |
|-----------------------------------|---------------------|------------|
| Connected air duct size | mm | 630 |
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 750 |
| Unit current | A | 3.5 |
| Maximum airflow | m ³ /h | 11900 |
| Sound pressure level LpA at 3 m | dB(A) | 67 |
| Weight | kg | 16.4 |
| Transported air temperature (max) | °C | 60 |
| Transported air temperature (min) | °C | -30 |
| Ingress protection rating | - | IPX4 |

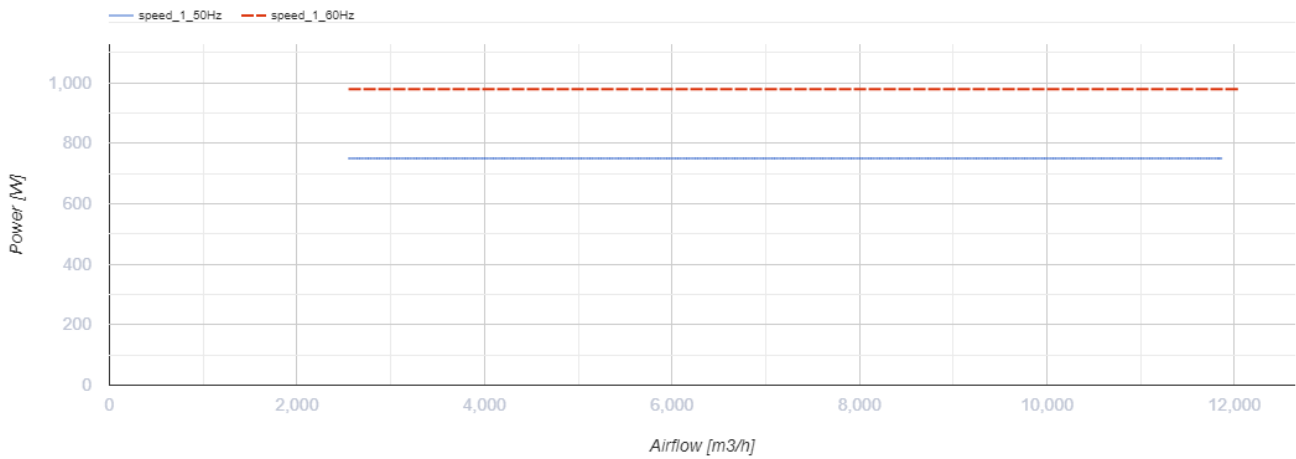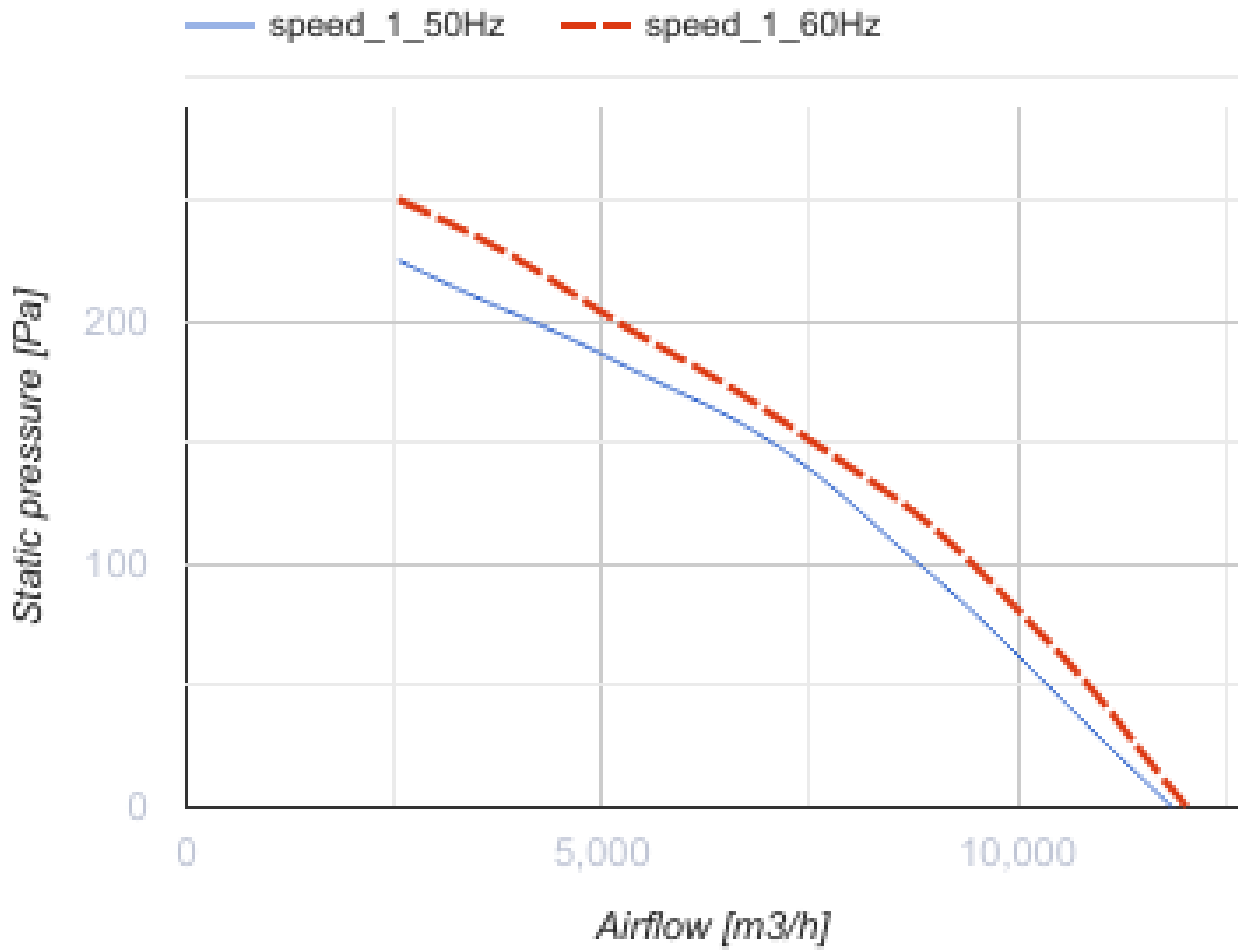

Dimensions

| ØD | ØD1 | ØD2 | Ød | B | L |
|-----|-----|-----|------|-----|-----|
| 645 | 674 | 715 | 11.5 | 740 | 250 |



Ecodesign

| Trademark | Vents |
|---------------------------------------|---------------------|
| Model | VKF 4E 630 |
| Type of drive installed | External MSD or VSD |
| Type of heat recovery system | None |
| Nominal flow rate (m ³ /s) | 1.971 |
| Nominal external pressure (Pa) | 149 |
| Maximum external leakage rates (%) | 2.7 |
| Static efficiency (%) | 37.5 |
| Declared typology | NRVU UVU |
| Effective electric power input (kW) | 0.8 |
| Sound power level (dB(A)) | 95 |