


VKHz 450 EC



Roof exhaust centrifugal fans with horizontal air exhaust


- Maximum airflow: 8110
- Sound pressure level LpA at 3 m: 63
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel

| | Unit of measurement | VKHz 450 EC |
|--|---------------------|-------------|
| Speed | - | 1 |
| Minimum supply voltage | V | 400 |
| Maximum supply voltage | V | 400 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 1323 |
| Unit current | A | 3.27 |
| Maximum airflow | m ³ /h | 8110 |
| Sound pressure level LpA at 3 m | dB(A) | 63 |
| Weight | kg | 46 |
| Transported air temperature (max) | °C | 60 |
| Transported air temperature (min) | °C | -20 |
| Ingress protection rating | - | IPX4 |
| Ingress protection rating of the drive | - | IP54 |

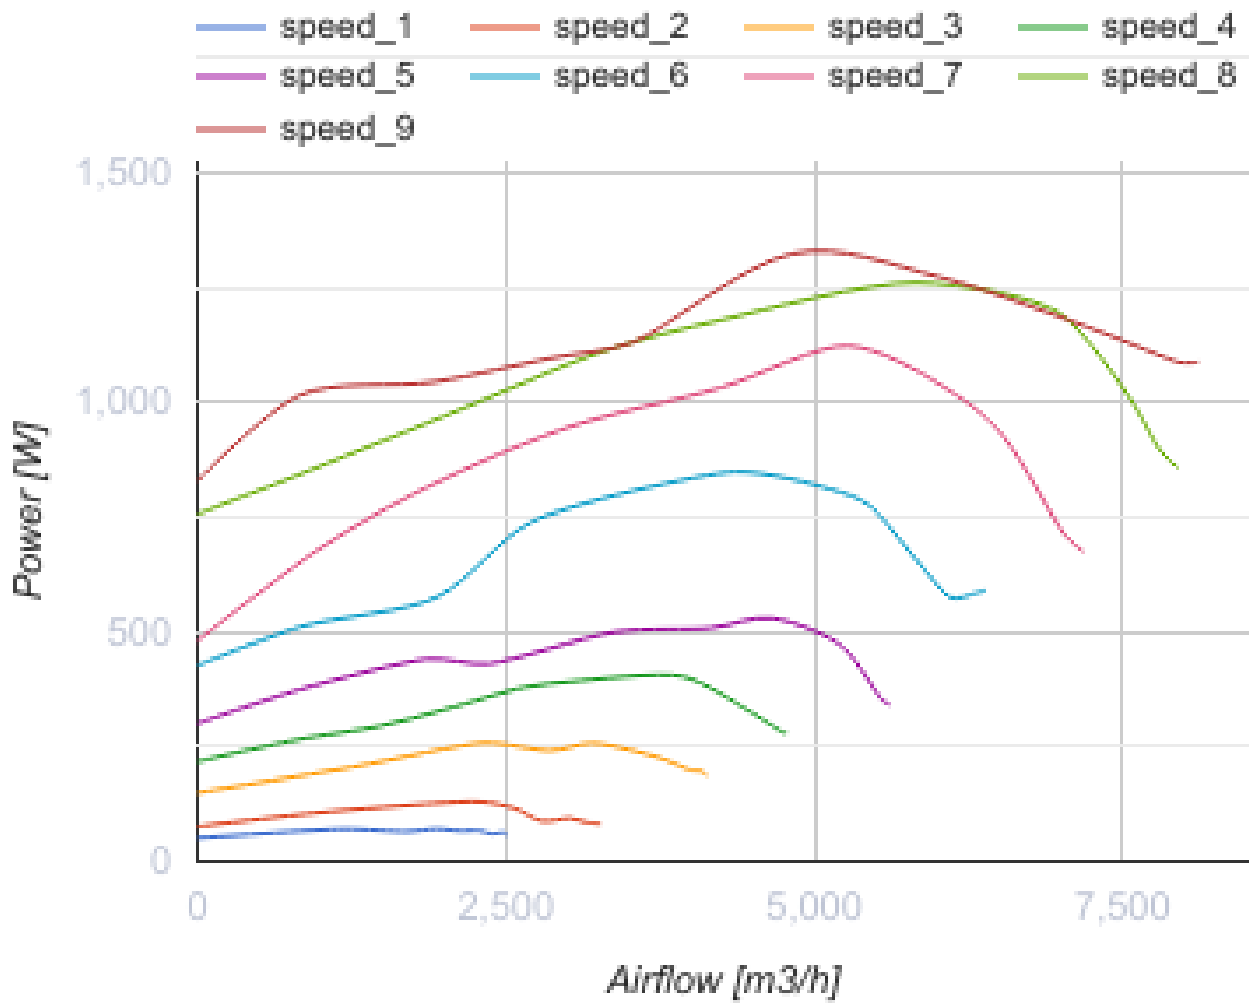

Dimensions

| ∅D | ∅d | H | L | L1 | L2 |
|-----|----|-----|-----|-----|-----|
| 438 | 11 | 420 | 710 | 535 | 700 |

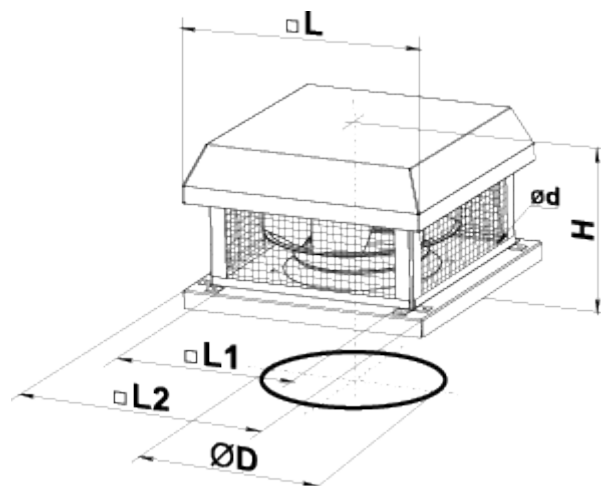

Ecodesign

| Trademark | Vents |
|---------------------------------------|----------------|
| Model | VKHz 450 EC |
| Type of drive installed | Integrated VSD |
| Type of heat recovery system | None |
| Nominal flow rate (m ³ /s) | 1.341 |
| Nominal external pressure (Pa) | 597 |
| Maximum external leakage rates (%) | 2.7 |
| Static efficiency (%) | 66.7 |
| Declared typology | NRVU UVU |
| Effective electric power input (kW) | 1.323 |
| Sound power level (dB(A)) | 83 |