



VKHz 4E 250

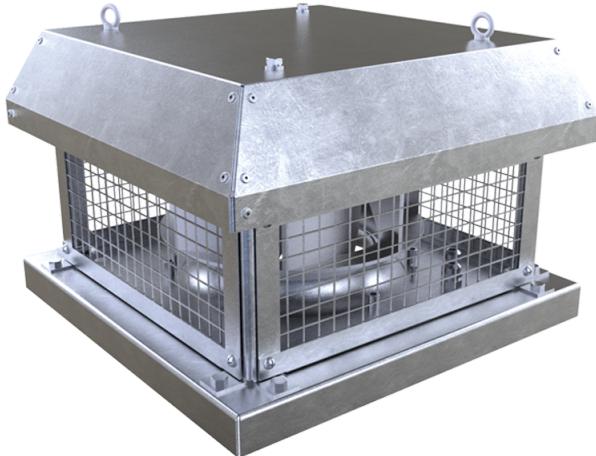


Centrifugal roof fans with horizontal air exhaust

- Maximum airflow: 820
- Sound pressure level LpA at 3 m: 46
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Galvanized steel


	Unit of measurement	VKHz 4E 250
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	48
Unit current	A	0.23
Maximum airflow	m³/h	820
Sound pressure level LpA at 3 m	dB(A)	46
Weight	kg	12.1
Transported air temperature (max)	°C	50
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

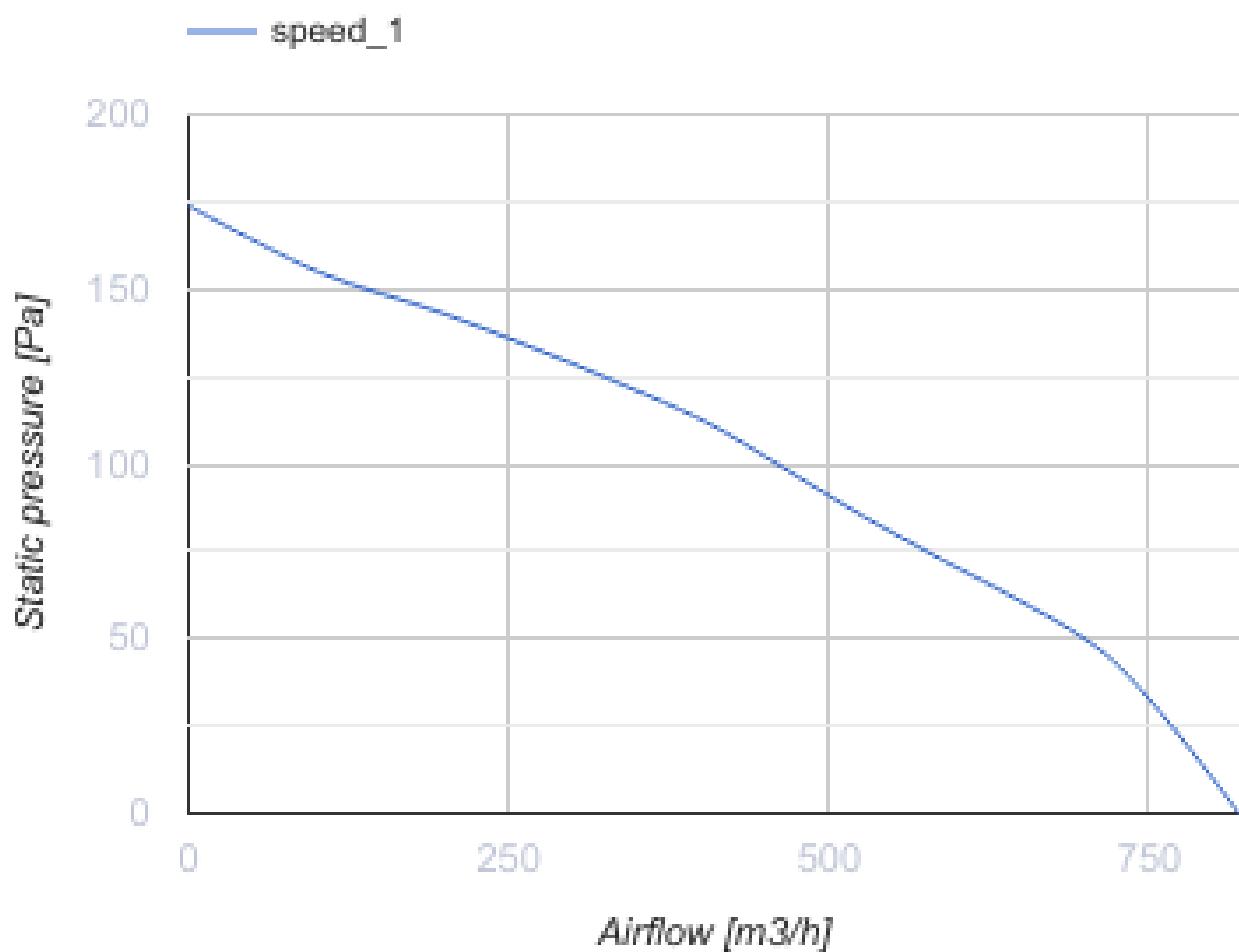

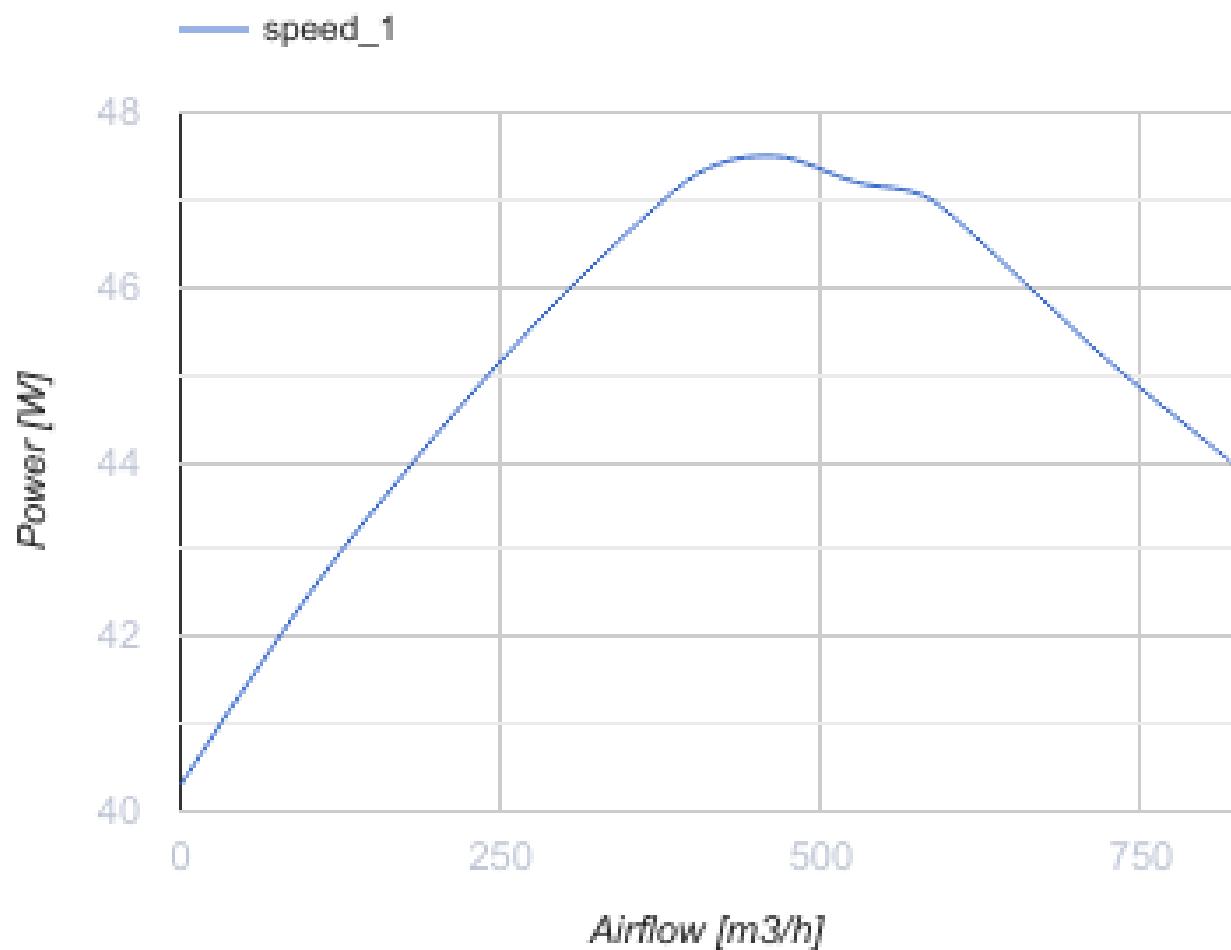


Dimensions

H	H1	A	B	C	Ød	ØD
237	244	451	450	330	11	285

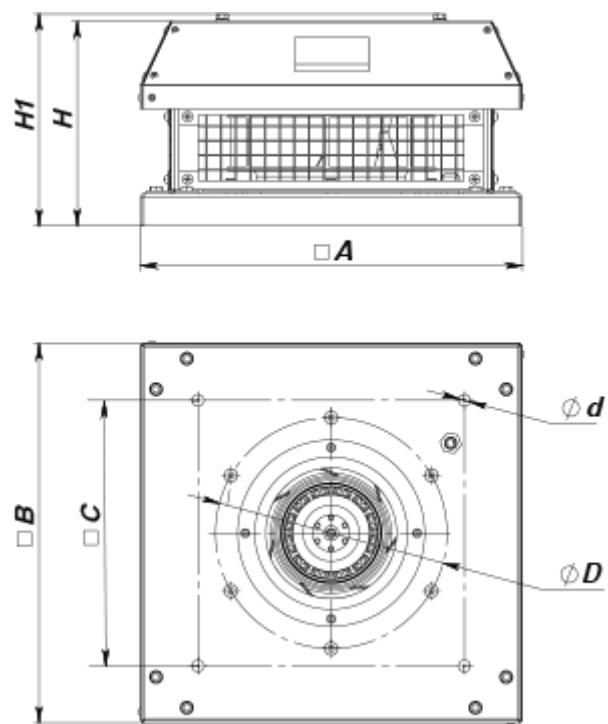

Ecodesign

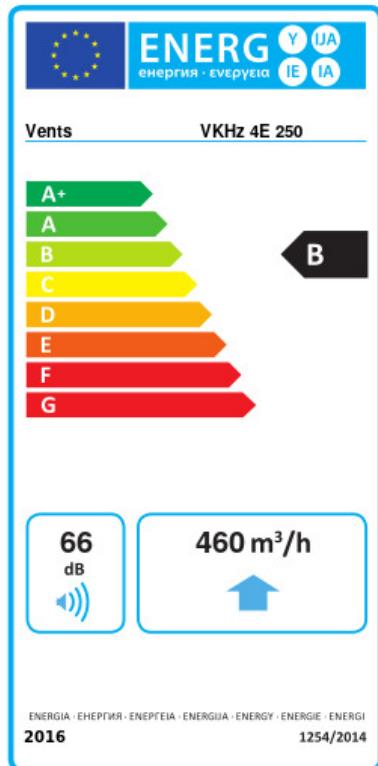

Trademark	Vents			
Model	VKhZ 4E 250			
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm	
	53.4	A+	26.4	B
Type of ventilation unit	Unidirectional			
Type of drive installed	Variable speed			
Type of heat recovery system	None			
Maximum flow rate (m ³ /h)	460			
Electric power input (W)	47			
Reference flow rate (m ³ /s)	0.089			
Reference pressure difference (Pa)	50			
Specific power input (SPI) (W/(m ³ /h))	0.146			
Control typology	Local demand control			
Maximum external leakage rates (%)	2.7			
Declared typology	RVU UVU			
Sound power level (dB(A))	66			
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm	
	77	77	77	
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm	
	5536	2830	1280	