



VKM 100 EC



Inline centrifugal fans in steel casing


- Maximum airflow: 345
- Sound pressure level LpA at 3 m: 44
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position

	Unit of measurement	VKM 100 EC
Connected air duct size	mm	100
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	90
Unit current	A	0.7
Maximum airflow	m ³ /h	345
Sound pressure level LpA at 3 m	dB(A)	44
Weight	kg	3.2
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

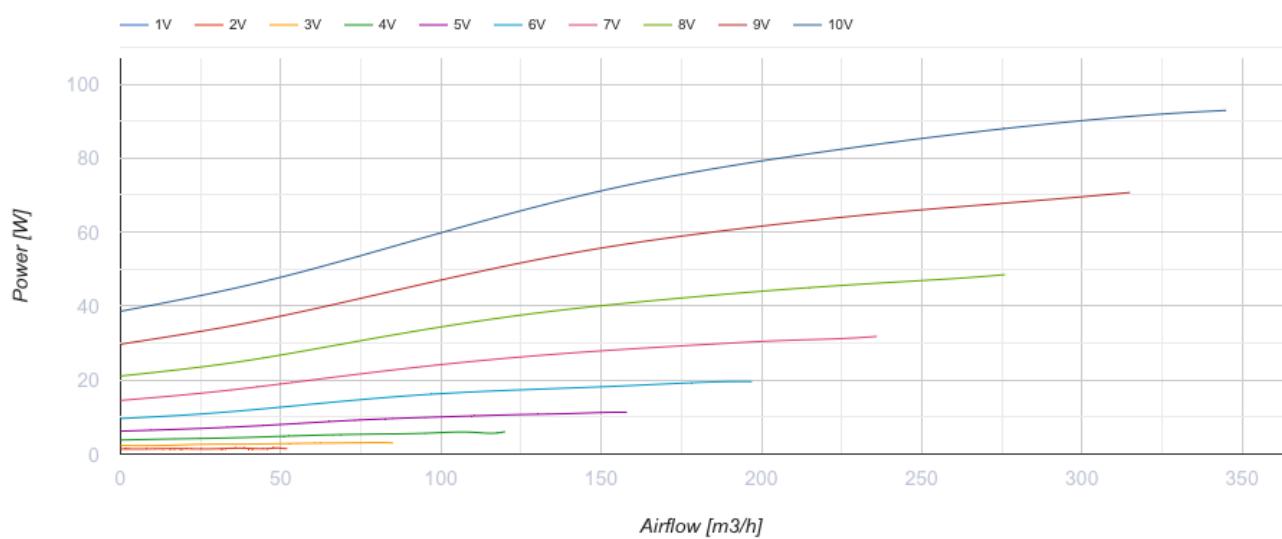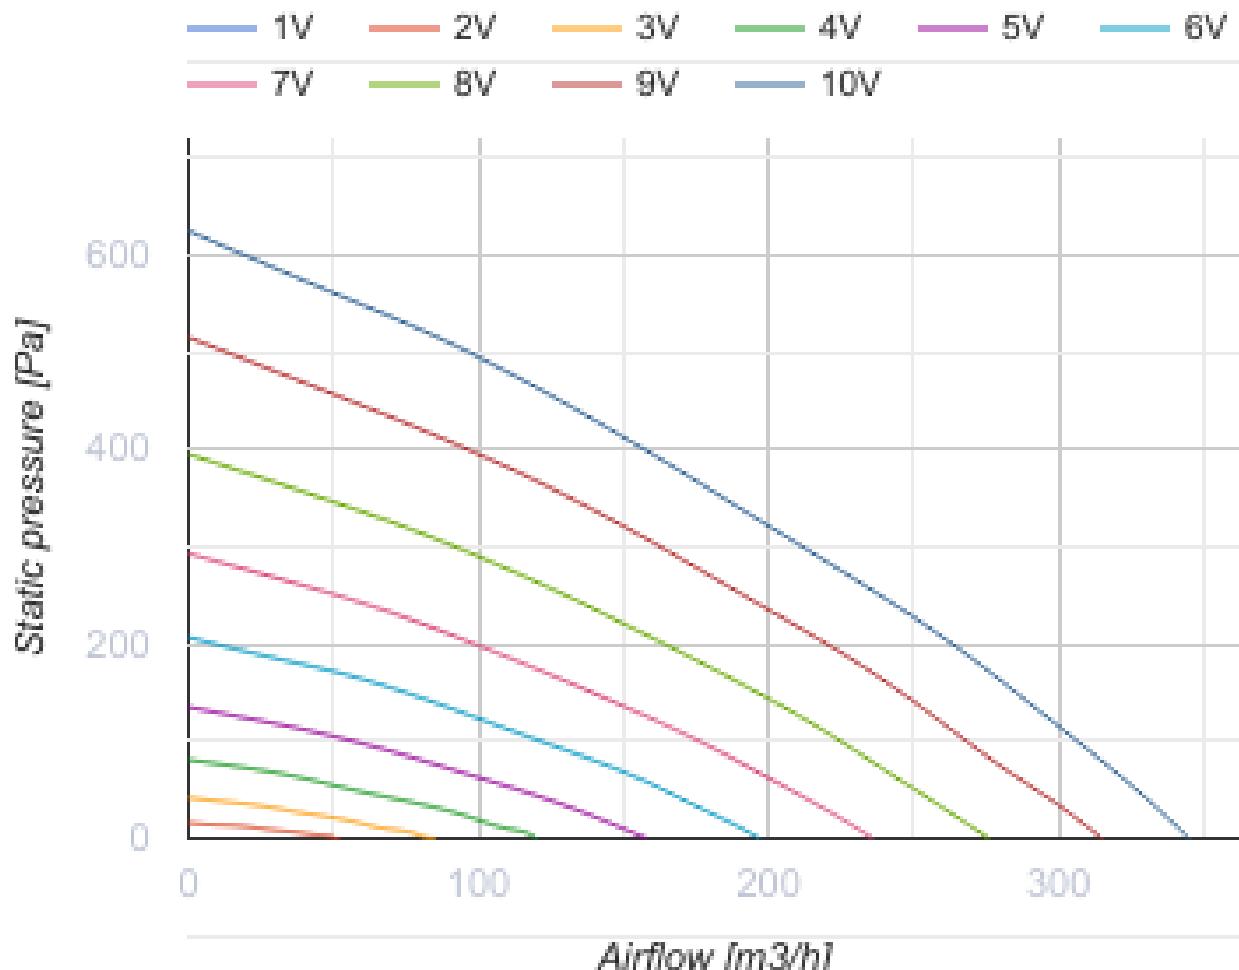


Dimensions

ØD	ØD1	B	B1	H	L	L1	L2	L3
98	255	310	270	340	203	20	25	30

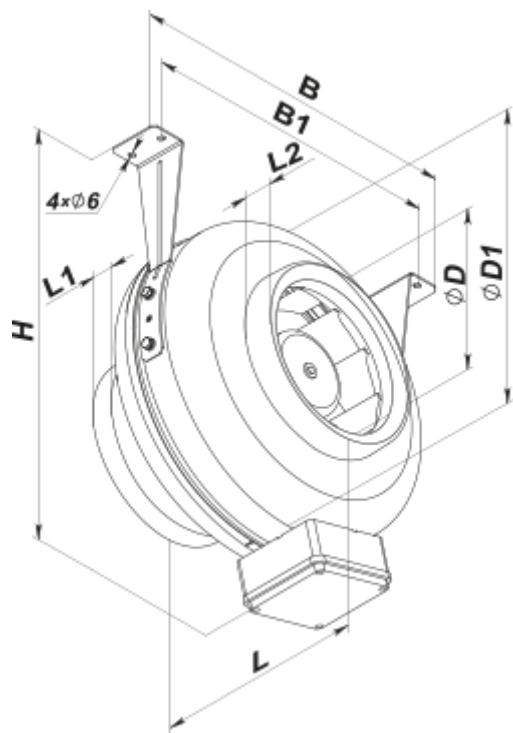

Ecodesign

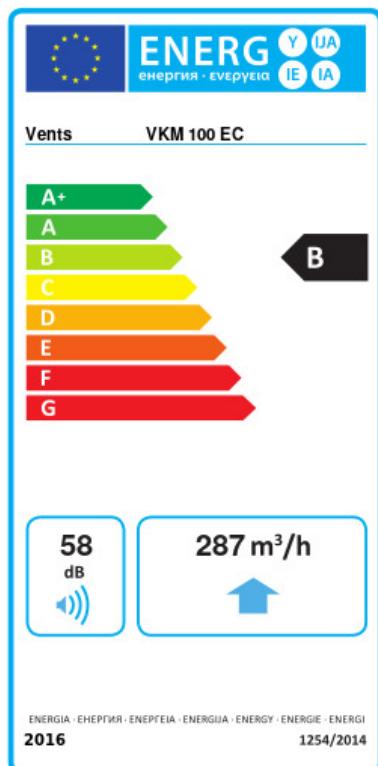

Trademark	Vents		
Model	VKM 100 EC		
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm
	-53.3	A+	-26.3 B -10.8 E
Type of ventilation unit	Unidirectional		
Type of drive installed	Variable speed		
Type of heat recovery system	None		
Maximum flow rate (m ³ /h)	287		
Electric power input (W)	80.8		
Reference flow rate (m ³ /s)	0.056		
Reference pressure difference (Pa)	50		
Specific power input (SPI) (W/(m ³ /h))	0.153		
Control typology	Local demand control		
Maximum external leakage rates (%)	2.7		
Declared typology	RVU UVU		
Sound power level (dB(A))	58		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
	81	81	81
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
	5536	2830	1280