



VKM 315 EC



Centrifugal inline fans with EC-motors


- Maximum airflow: 1370
- Sound pressure level LpA at 3 m: 48
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position

	Unit of measurement	VKM 315 EC
Connected air duct size	mm	315
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	164
Unit current	A	1.15
Maximum airflow	m ³ /h	1370
Sound pressure level LpA at 3 m	dB(A)	48
Weight	kg	7.3
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

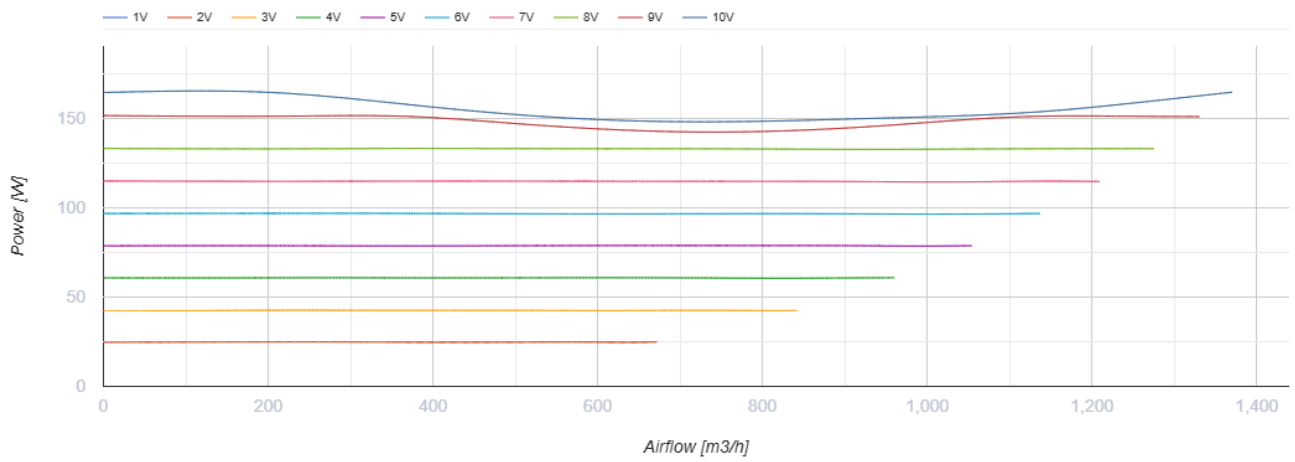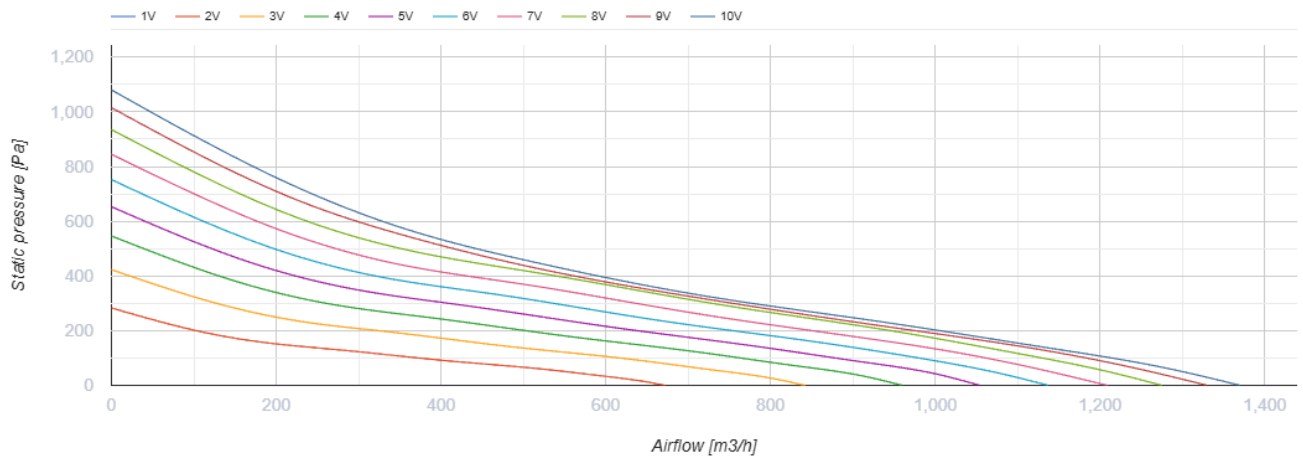

Dimensions

ØD	ØD1	B	B1	H	L	L1	L2	L3
314	405	455	415	465	260	30	30	40

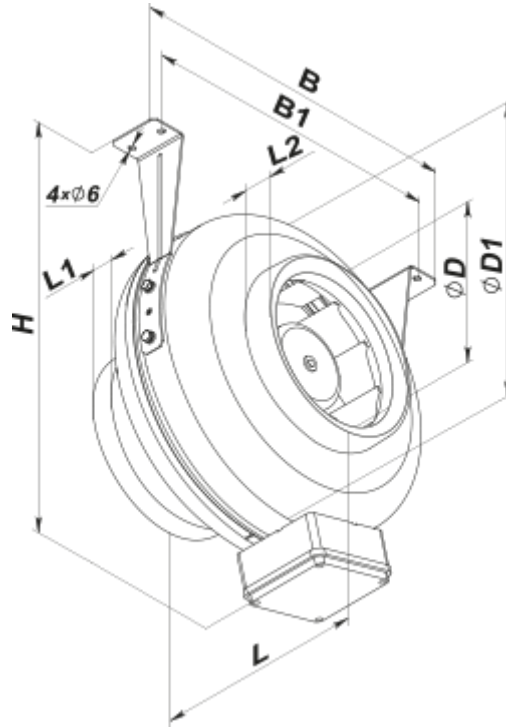

Ecodesign

Trademark	Vents
Model	VKM 315 EC
Type of drive installed	Integrated VSD
Type of heat recovery system	None
Nominal flow rate (m ³ /s)	0.201
Nominal external pressure (Pa)	314
Maximum external leakage rates (%)	2.7
Static efficiency (%)	52.1
Declared typology	NRVU UVU
Effective electric power input (kW)	0.142
Sound power level (dB(A))	68