


# VKMS 200




Inline centrifugal fans in steel casing

- Maximum airflow: 1150
- Sound pressure level LpA at 3 m: 49
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position


	Unit of measurement	VKMS 200
Connected air duct size	mm	200
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	193
Unit current	A	0.84
Maximum airflow	m <sup>3</sup> /h	1150
Sound pressure level LpA at 3 m	dB(A)	49
Weight	kg	8.3
Transported air temperature (max)	°C	45
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

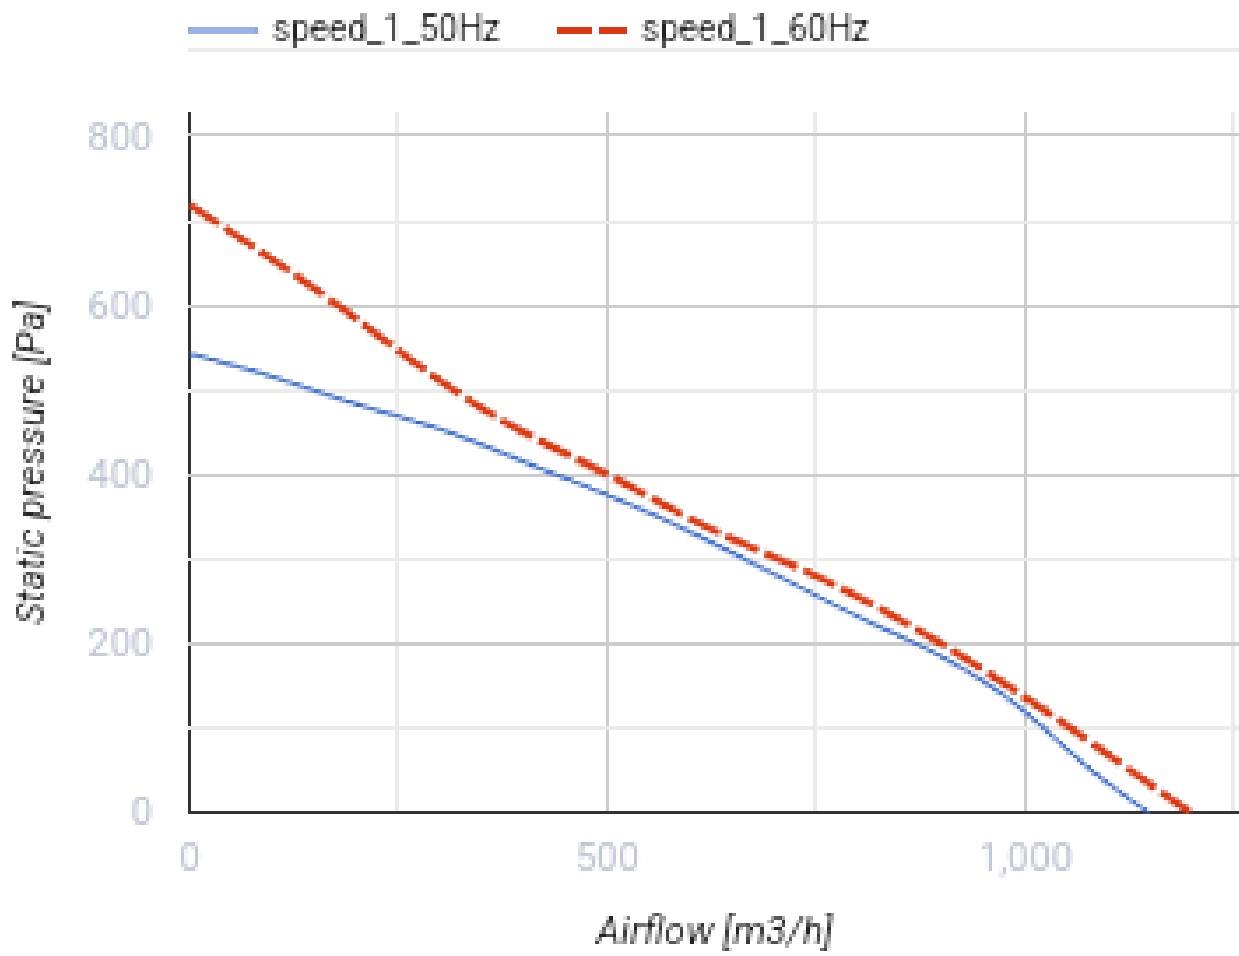

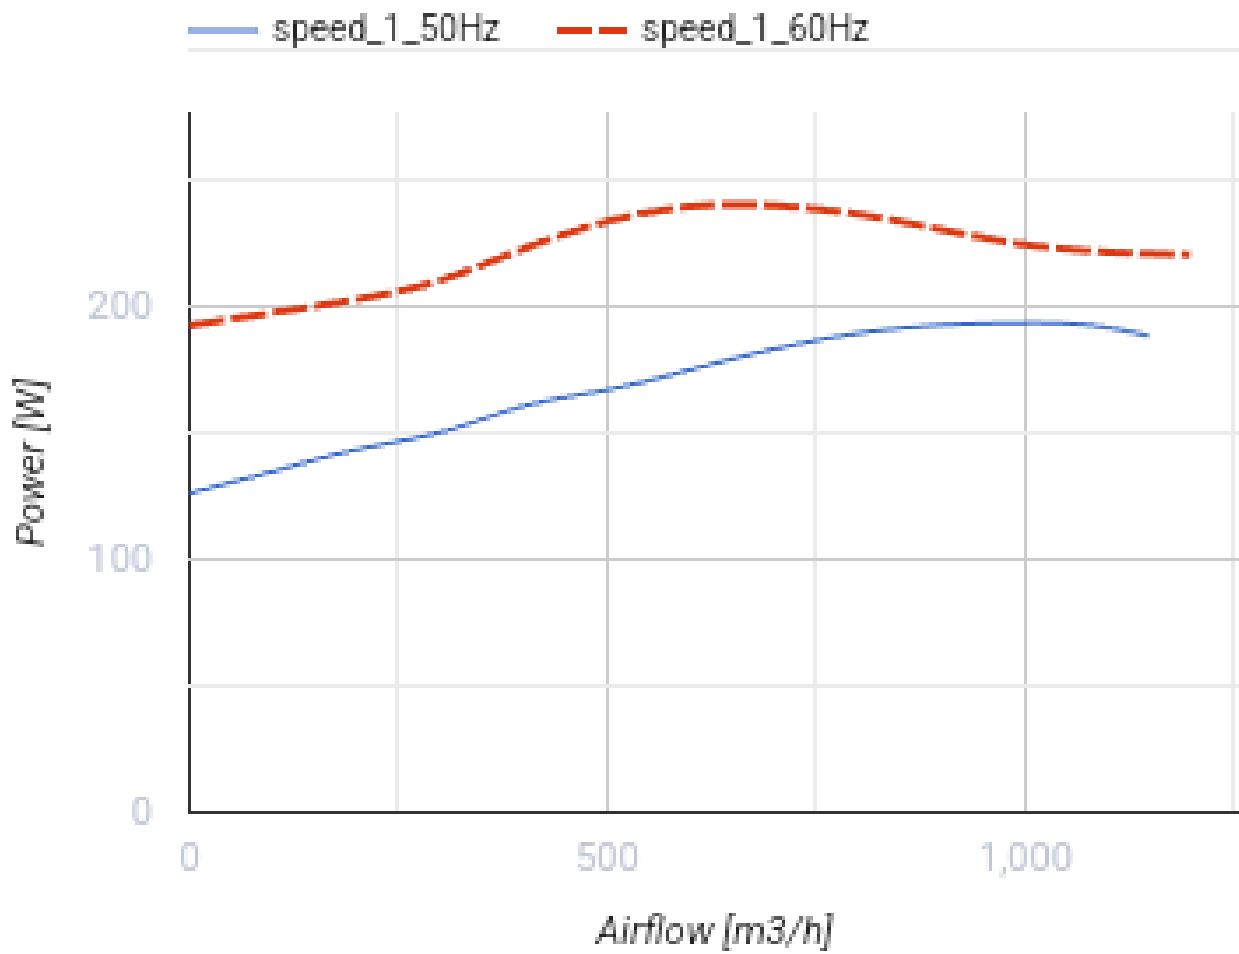

### Dimensions

ØD	ØD1	B	B1	L	L1	L2	L3
198	345	395	355	255	25	30	40

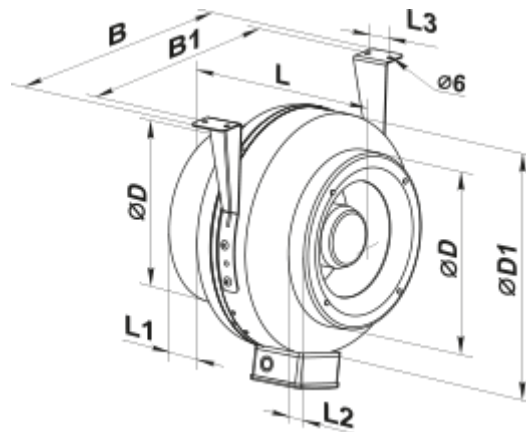

## Ecodesign

Trademark	Vents
Model	VKMS 200
Type of drive installed	External MSD or VSD
Type of heat recovery system	None
Nominal flow rate (m <sup>3</sup> /s)	0.151
Nominal external pressure (Pa)	353
Maximum external leakage rates (%)	2.7
Static efficiency (%)	32
Declared typology	NRVU UVU
Effective electric power input (kW)	0.17
Sound power level (dB(A))	71