


VKMS 200 EC




Inline centrifugal fans in steel casing

- Maximum airflow: 1010
- Sound pressure level LpA at 3 m: 48
- Motor type: EC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position


	Unit of measurement	VKMS 200 EC
Connected air duct size	mm	200
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	100
Unit current	A	0.74
Maximum airflow	m³/h	1010
Sound pressure level LpA at 3 m	dB(A)	48
Weight	kg	5.4
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

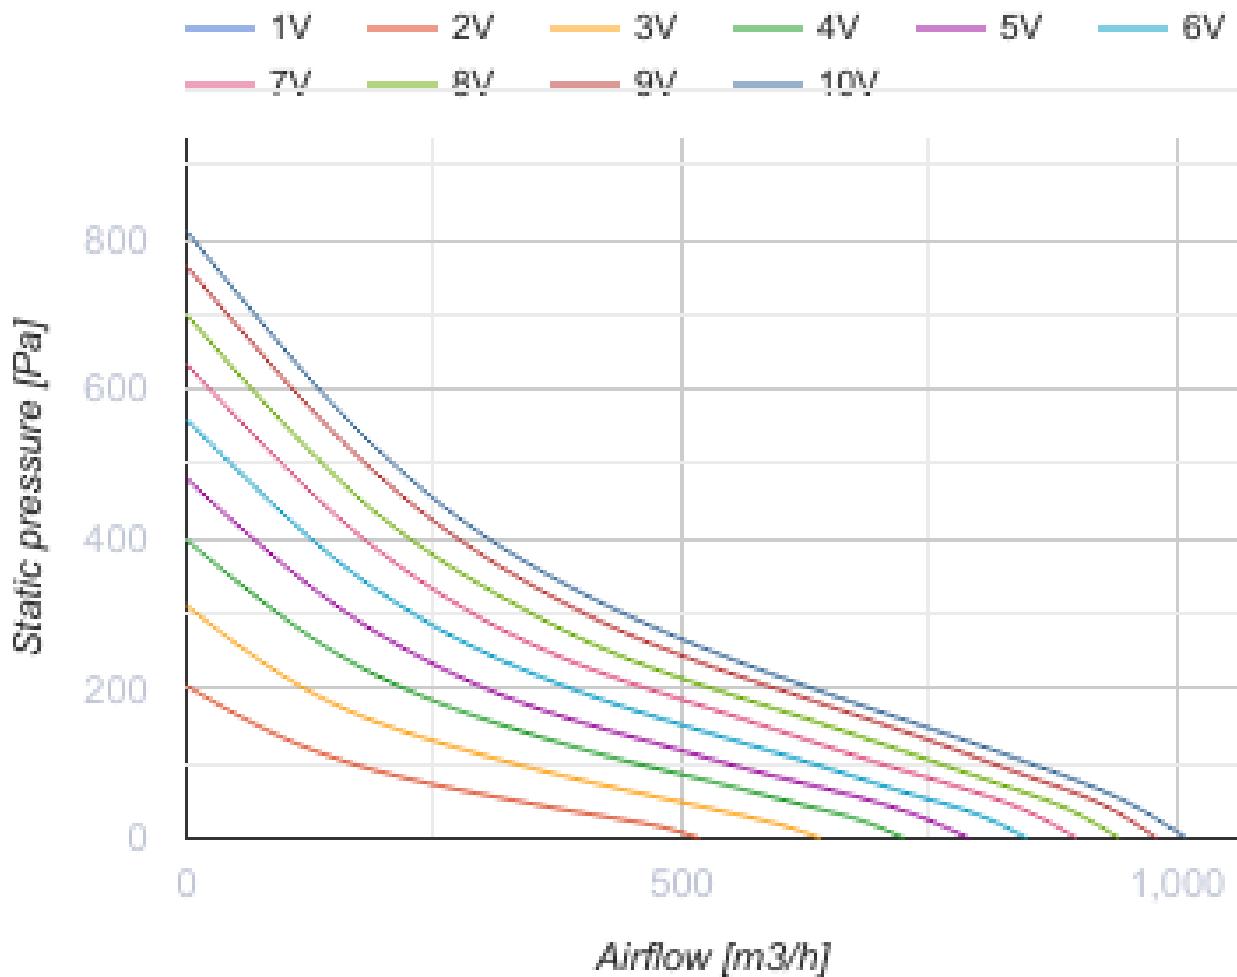

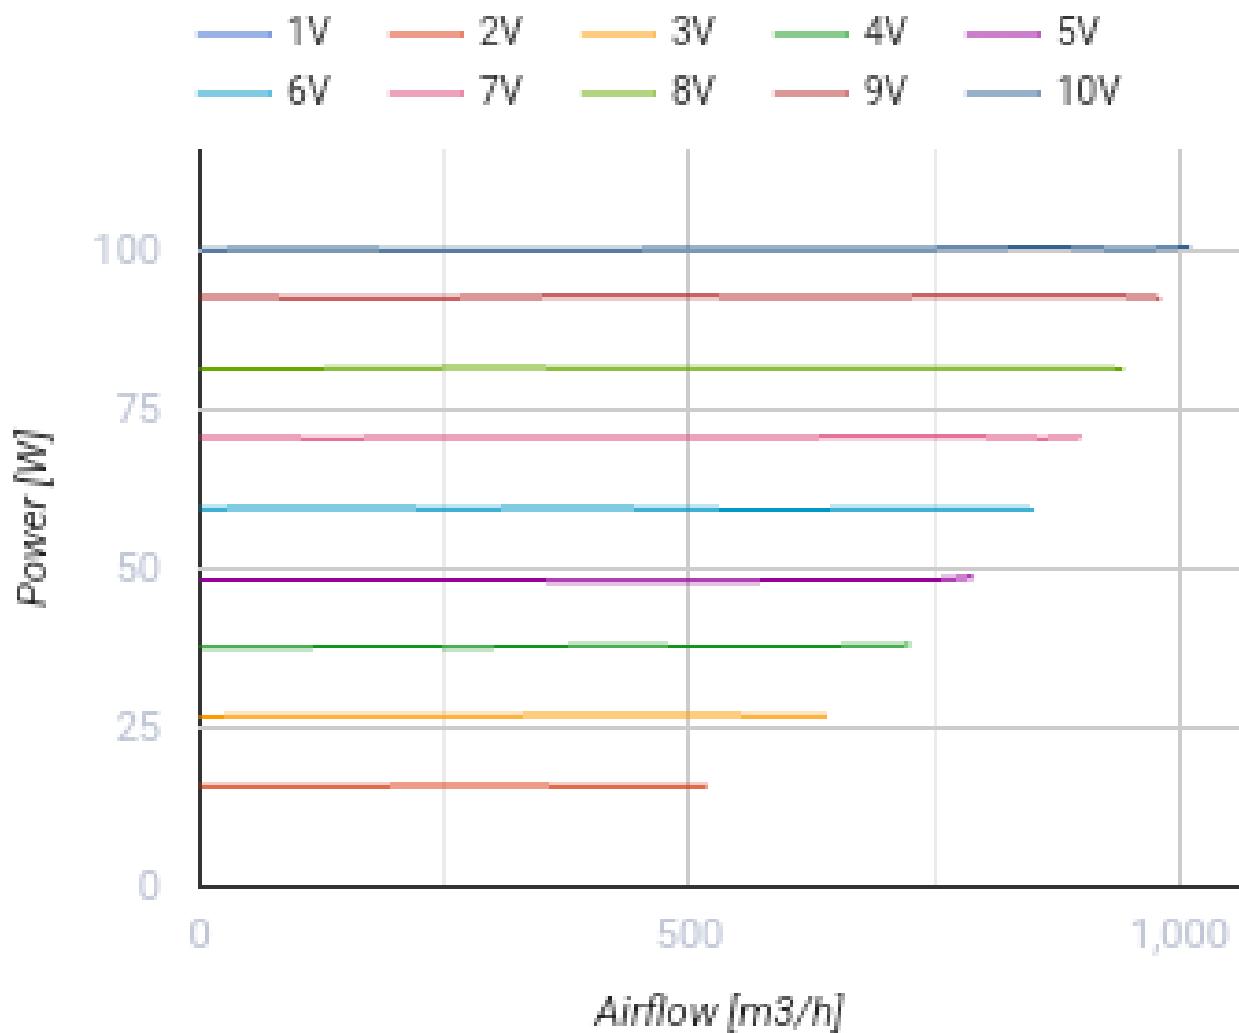


Dimensions

ØD	ØD1	B	B1	H	L	L1	L2	L3
198	345	395	355	435	255	25	30	40

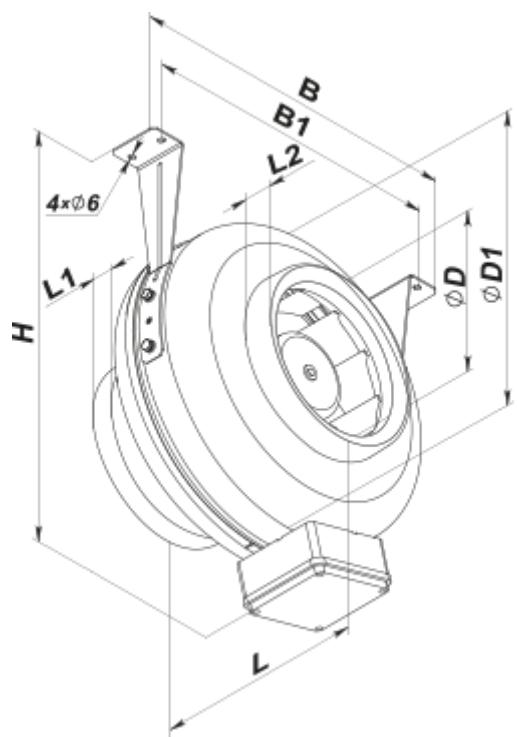

Ecodesign

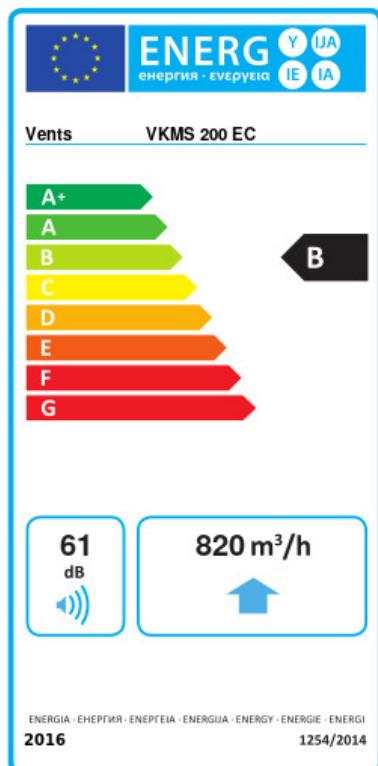

Trademark	Vents			
Model	VKMS 200 EC			
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average	
	-54.4	A+	-27.4	B -11.9 E
Type of ventilation unit	Unidirectional			
Type of drive installed	Variable speed			
Type of heat recovery system	None			
Maximum flow rate (m ³ /h)	820			
Electric power input (W)	108			
Reference flow rate (m ³ /s)	0.159			
Reference pressure difference (Pa)	50			
Specific power input (SPI) (W/(m ³ /h))	0.071			
Control typology	Local demand control			
Maximum external leakage rates (%)	2.7			
Declared typology	RVU UVU			
Sound power level (dB(A))	61			
The annual electricity consumption (AEC) (kWh/a)	Cold		Average	
	38	38	38	
The annual heating saved (AHS) (kWh/a)	Cold		Average	
	5536	2830	1280	