


# VKMSz 150



Inline centrifugal fans in galvanized casing


- Maximum airflow: 710
- Sound pressure level LpA at 3 m: 48
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	<b>Unit of measurement</b>	<b>VKMSz 150</b>
Connected air duct size	mm	150
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	127
Unit current	A	0.56
Maximum airflow	m³/h	710
Sound pressure level LpA at 3 m	dB(A)	48
Weight	kg	4.8
Transported air temperature (max)	°C	60
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

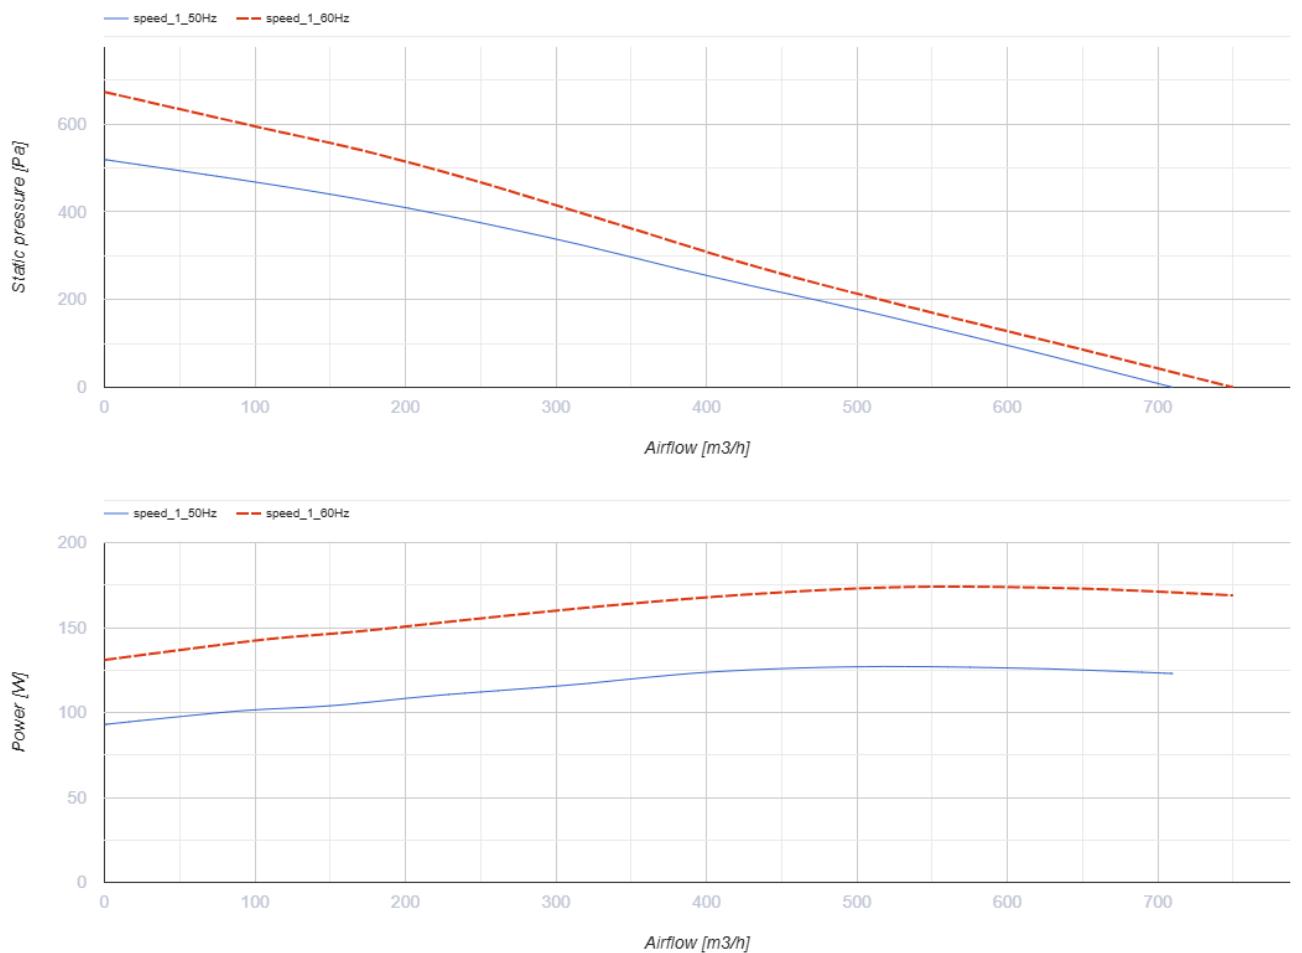


## Dimensions

ØD	ØD1	B	B1	L	L1	L2	L3
149	345	355	395	230	20	20	40

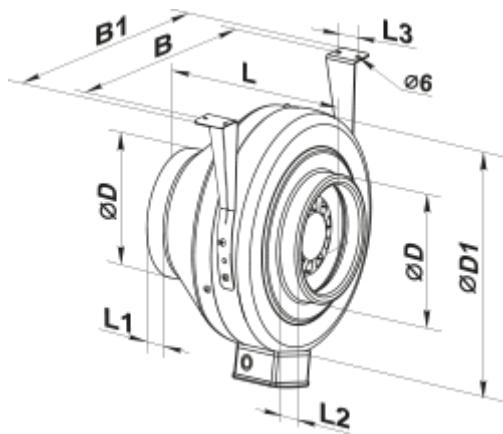

## Ecodesign

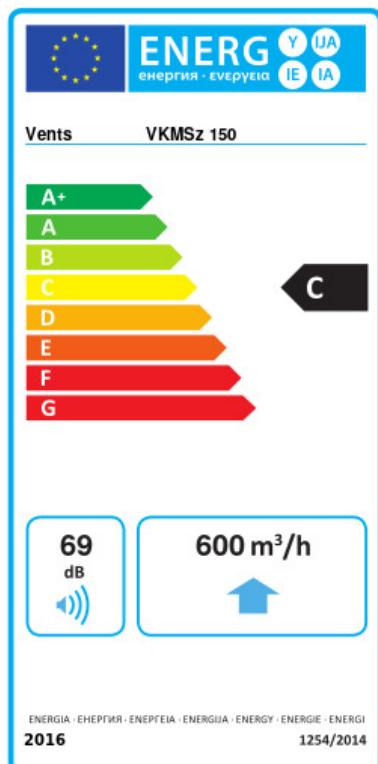

Trademark	Vents		
Model	VKMSz 150		
Specific energy consumption (SEC) (kWh/(m <sup>2</sup> /a))	Cold	Average	Warm
	-52.6	A+	-25.5 C -10 E
Type of ventilation unit	Unidirectional		
Type of drive installed	Variable speed		
Type of heat recovery system	None		
Maximum flow rate (m <sup>3</sup> /h)	600		
Electric power input (W)	126		
Reference flow rate (m <sup>3</sup> /s)	0.117		
Reference pressure difference (Pa)	50		
Specific power input (SPI) (W/(m <sup>3</sup> /h))	0.21		
Control typology	Local demand control		
Maximum external leakage rates (%)	2.7		
Declared typology	RVU UVU		
Sound power level (dB(A))	69		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
	111	111	111
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
	5536	2830	1280