



VKOM 250



Inline axial fans


- Maximum airflow: 1070
- Sound pressure level LpA at 3 m: 37
- Motor type: AC
- Impeller type: Axial
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

| | Unit of measurement | VKOM 250 |
|--|---------------------|----------|
| Connected air duct size | mm | 250 |
| Speed | - | 1 |
| Minimum supply voltage | V | 220 |
| Maximum supply voltage | V | 240 |
| Power supply frequency | Hz | 50/60 |
| Rated power | W | 68 |
| Unit current | A | 0.48 |
| Maximum airflow | m ³ /h | 1070 |
| Sound pressure level LpA at 3 m | dB(A) | 37 |
| Weight | kg | 3.7 |
| Transported air temperature (max) | °C | 40 |
| Transported air temperature (min) | °C | -30 |
| Ingress protection rating | - | IPX4 |
| Ingress protection rating of the drive | - | IP44 |

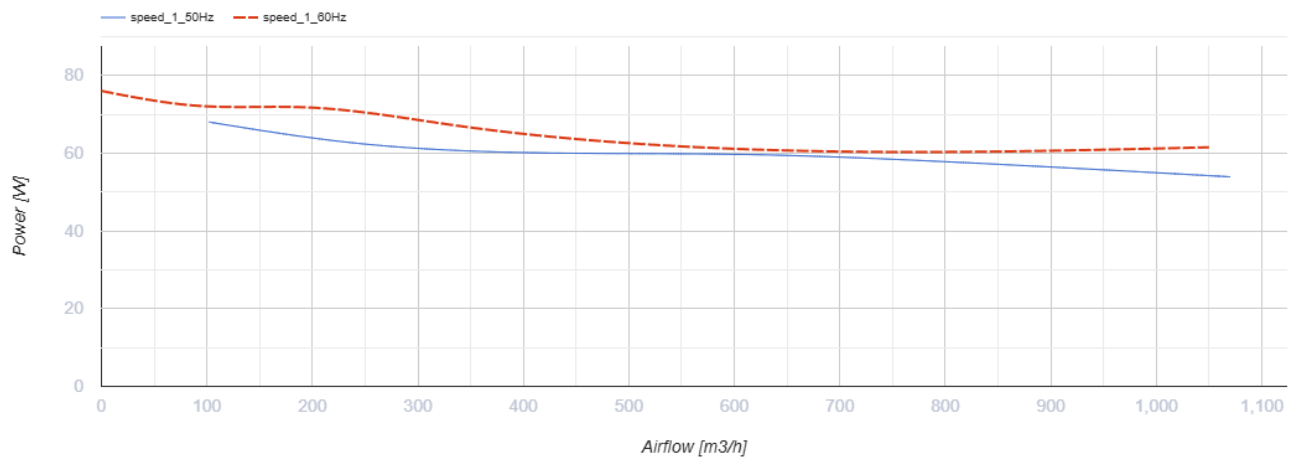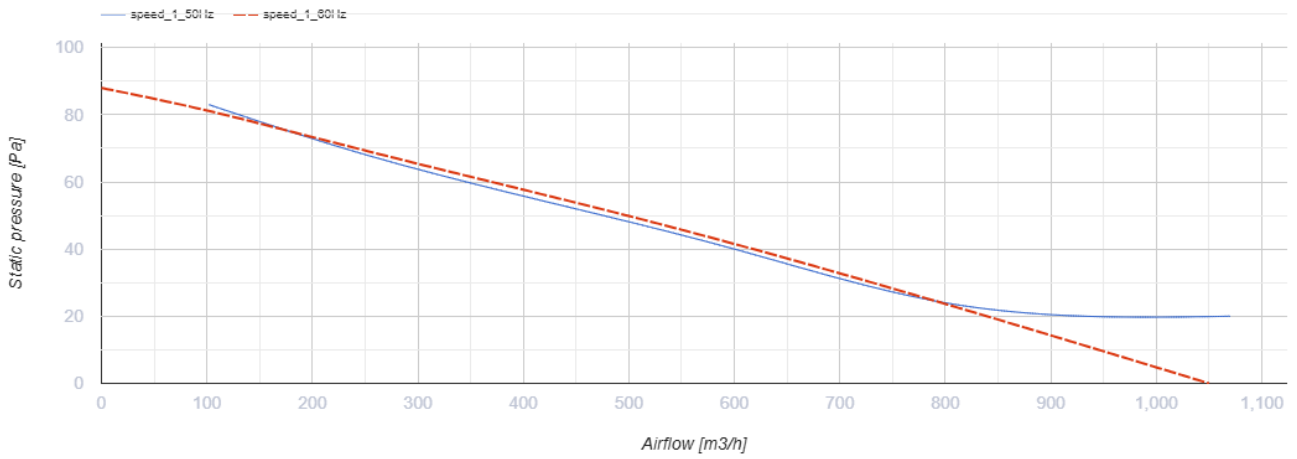

Dimensions

| ØD | B | L | L1 | L3 |
|-----|-----|-----|----|----|
| 262 | 283 | 270 | 55 | 30 |

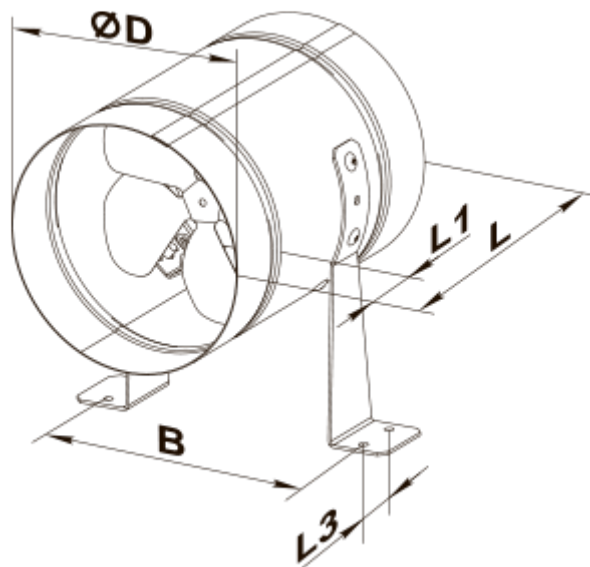

Ecodesign

| | |
|---------------------------------------|---------------------|
| Trademark | Vents |
| Model | VKOM 250 |
| Type of drive installed | External MSD or VSD |
| Type of heat recovery system | None |
| Nominal flow rate (m ³ /s) | 0.115 |
| Nominal external pressure (Pa) | 55 |
| Maximum external leakage rates (%) | 2.7 |
| Static efficiency (%) | 9.3 |
| Declared typology | NRVU UVU |
| Effective electric power input (kW) | 0.069 |
| Sound power level (dB(A)) | 68 |