


VKP 100


Centrifugal fans in the steel casing for round ducts

- Maximum airflow: 240
- Sound pressure level LpA at 3 m: 47
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position




	Unit of measurement	VKP 100
Connected air duct size	mm	100
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50/60
Rated power	W	58
Unit current	A	0.26
Maximum airflow	m³/h	240
Sound pressure level LpA at 3 m	dB(A)	47
Weight	kg	4.65
Transported air temperature (max)	°C	50
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

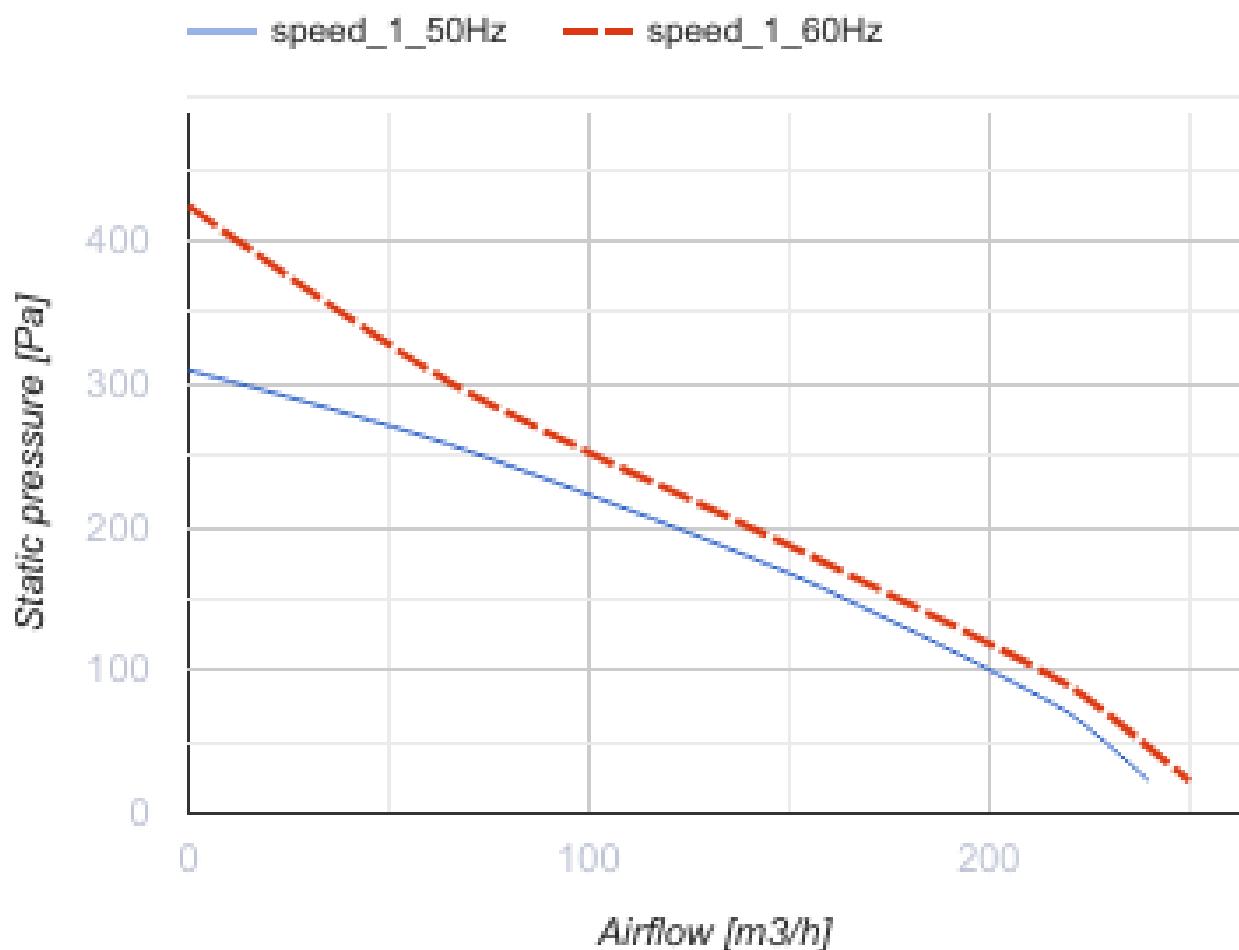

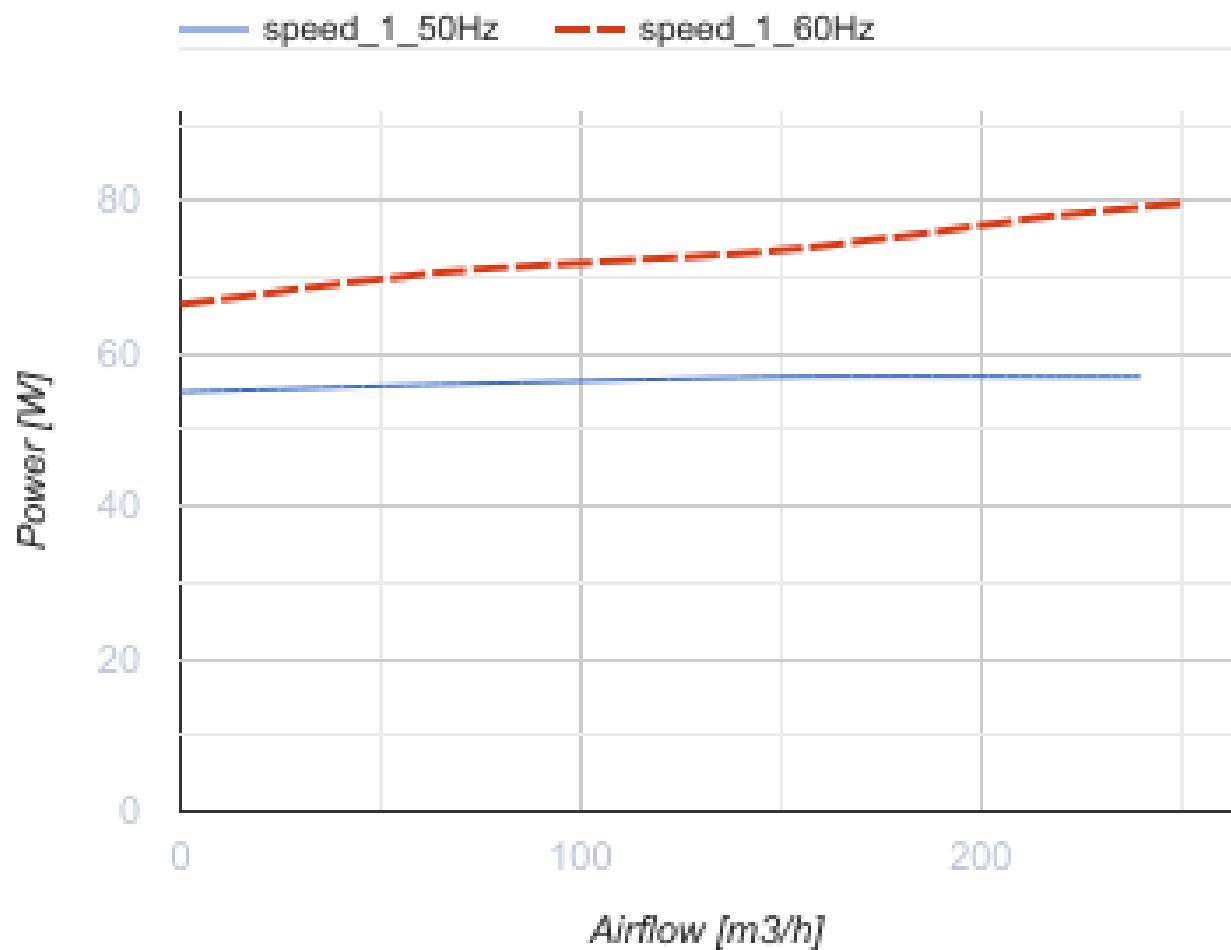


Dimensions

ØD	B	H	L	L2
99	252	133	420	321

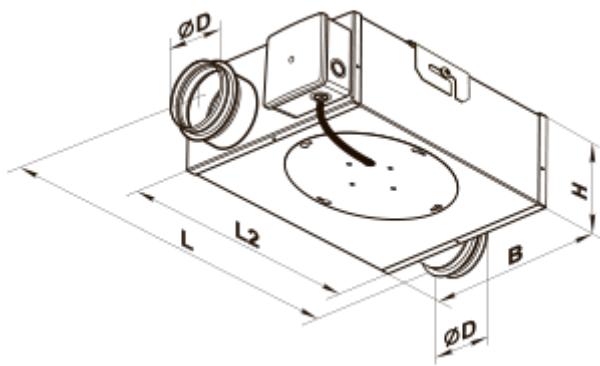

Ecodesign

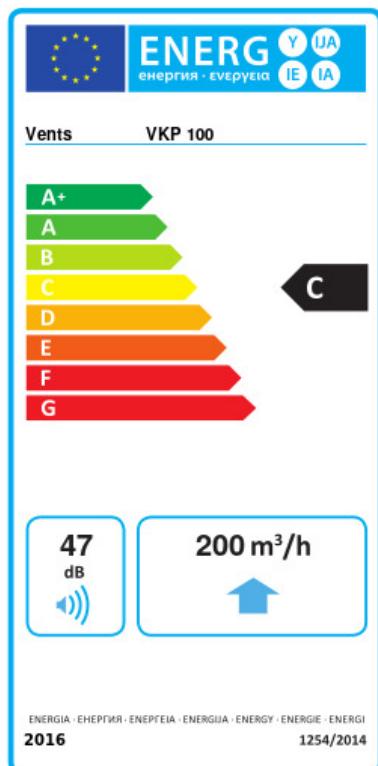

Trademark	Vents		
Model	VKP 100		
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm
	-52.3	A+	-25.3 C -9.8 F
Type of ventilation unit	Unidirectional		
Type of drive installed	Variable speed		
Type of heat recovery system	None		
Maximum flow rate (m ³ /h)	200		
Electric power input (W)	58		
Reference flow rate (m ³ /s)	0.039		
Reference pressure difference (Pa)	50		
Specific power input (SPI) (W/(m ³ /h))	0.228		
Control typology	Local demand control		
Maximum external leakage rates (%)	2.7		
Declared typology	RVU UVU		
Sound power level (dB(A))	47		
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm
	121	121	121
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm
	5536	2830	1280