



# VKP 100/100\*4 mini X3



Compact centrifugal fans in steel casing with permanent air flow maintaining at alternating pressure in the system

- Maximum airflow: 176
- Sound pressure level LpA at 3 m: 44
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position

|  | Unit of measurement | VKP 100/100*4 mini X3 |      |     |
|--|---------------------|-----------------------|------|-----|
| Connected air duct size                | mm                  | 100                   |      |     |
| Speed                                  | -                   | 3                     |      |     |
| Minimum supply voltage                 | V                   | 230                   |      |     |
| Maximum supply voltage                 | V                   | 230                   |      |     |
| Power supply frequency                 | Hz                  | 50                    |      |     |
| Rated power                            | W                   | 20                    | 26   | 45  |
| Unit current                           | A                   | 0.32                  | 0.34 | 0.4 |
| Maximum airflow                        | m <sup>3</sup> /h   | 97                    | 138  | 176 |
| Sound pressure level LpA at 3 m        | dB(A)               | 33                    | 36   | 44  |
| Weight                                 | kg                  | 3.37                  |      |     |
| Transported air temperature (max)      | °C                  | 50                    |      |     |
| Ingress protection rating              | -                   | IPX4                  |      |     |
| Ingress protection rating of the drive | -                   | IP44                  |      |     |

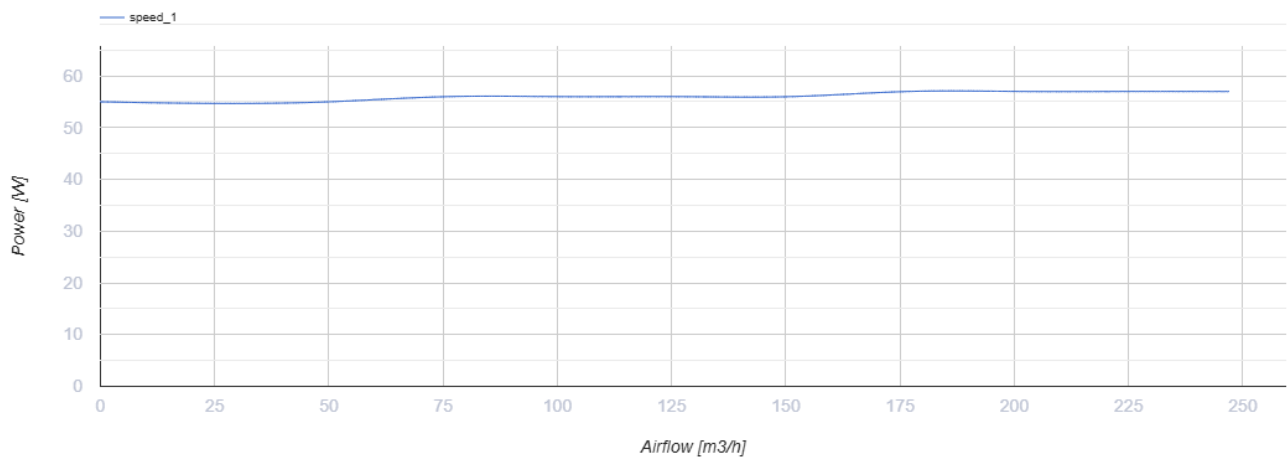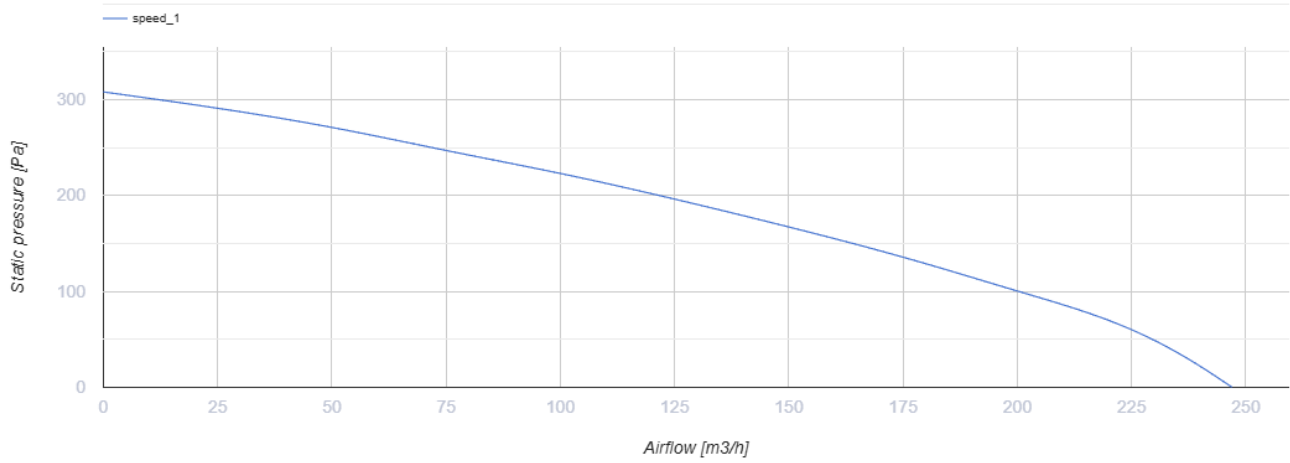

## Dimensions

| ØD | ØD1 | B   | H   | H1  | L1  | L2  |
|----|-----|-----|-----|-----|-----|-----|
| 99 | 99  | 252 | 110 | 166 | 297 | 253 |

