


# VKP 100/80\*4 mini X3




Compact centrifugal fans in steel casing with permanent air flow maintaining at alternating pressure in the system

- Maximum airflow: 176
- Sound pressure level LpA at 3 m: 44
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Coated steel
- Installation in any position

	Unit of measurement	VKP 100/80*4 mini X3		
Connected air duct size	mm	100		
Speed	-	3		
Minimum supply voltage	V	230		
Maximum supply voltage	V	230		
Power supply frequency	Hz	50		
Rated power	W	20	26	45
Unit current	A	0.32	0.34	0.4
Maximum airflow	m <sup>3</sup> /h	97	138	176
Sound pressure level LpA at 3 m	dB(A)	33	36	44
Weight	kg	3.37		
Transported air temperature (max)	°C	50		
Ingress protection rating	-	IPX4		
Ingress protection rating of the drive	-	IP44		

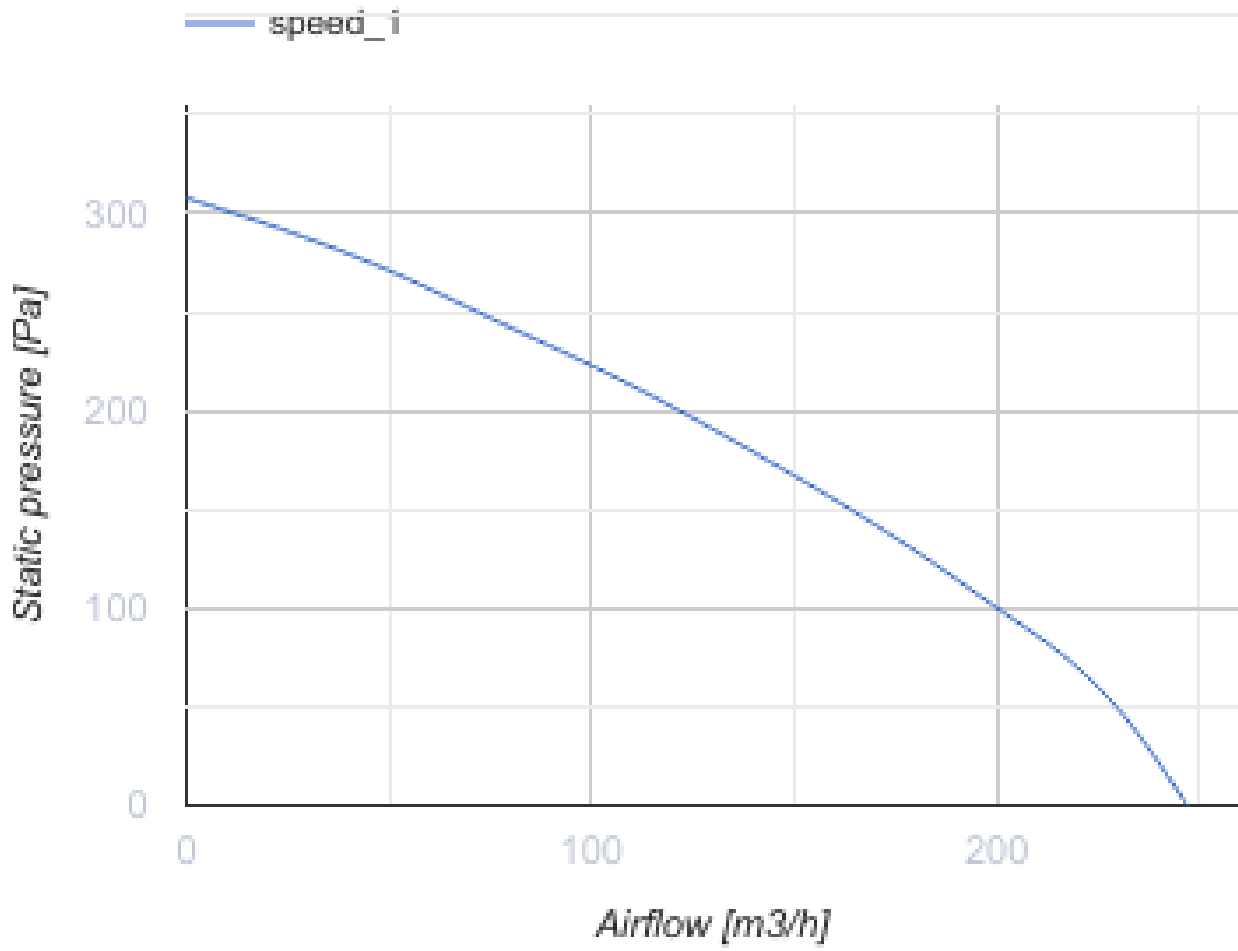

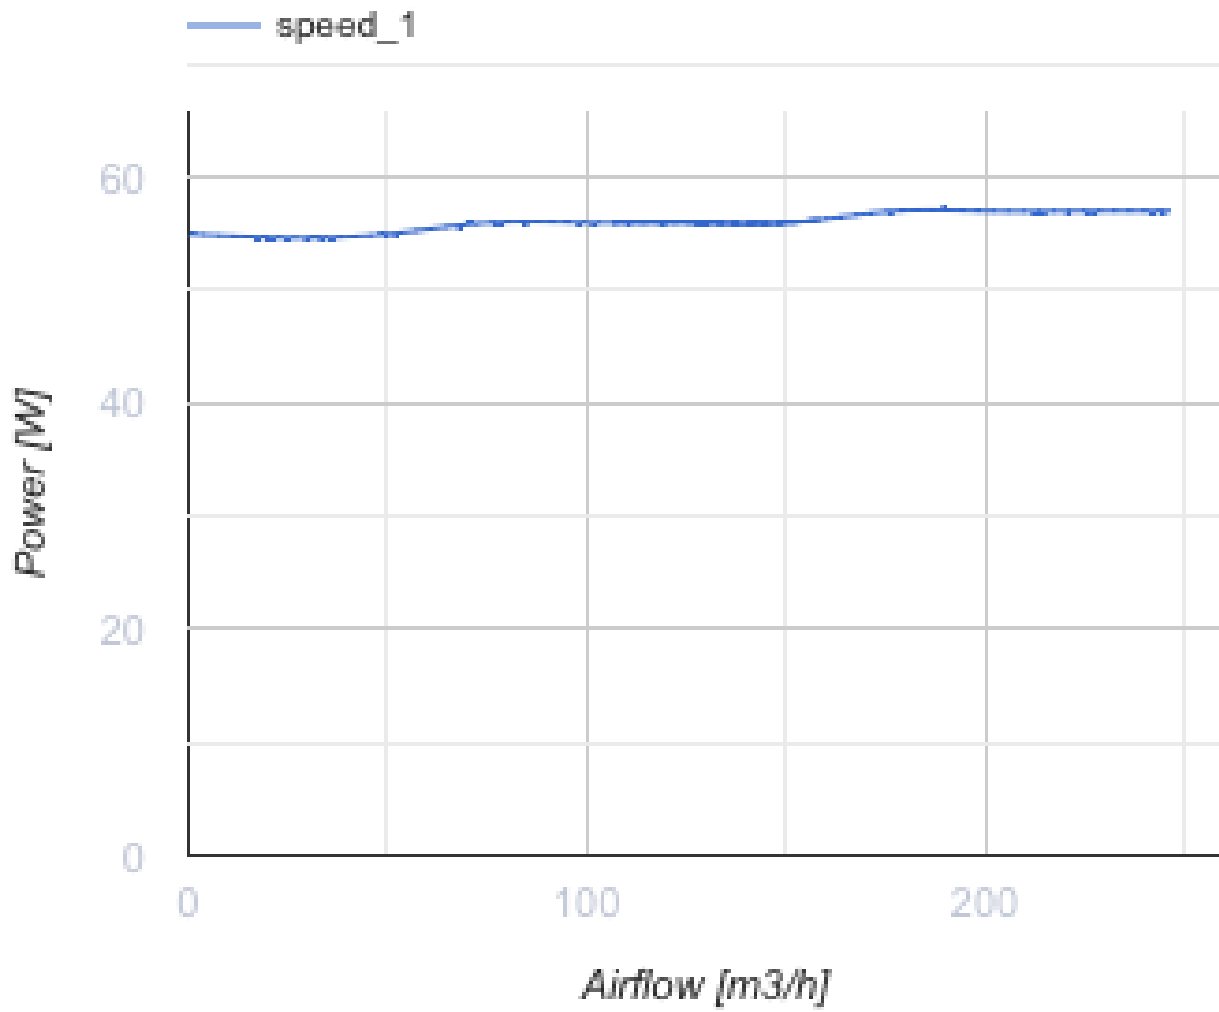

### Dimensions

ØD	ØD1	B	H	H1	L1	L2
99	79	252	110	166	297	253

