



VKP 125 mini



Compact centrifugal fans in steel casing with permanent air flow maintaining at alternating pressure in the system


- Maximum airflow: 242
- Sound pressure level LpA at 3 m: 37
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	VKP 125 mini
Connected air duct size	mm	125
Speed	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	48
Unit current	A	0.22
Maximum airflow	m ³ /h	242
Sound pressure level LpA at 3 m	dB(A)	37
Weight	kg	5.2
Transported air temperature (max)	°C	50
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

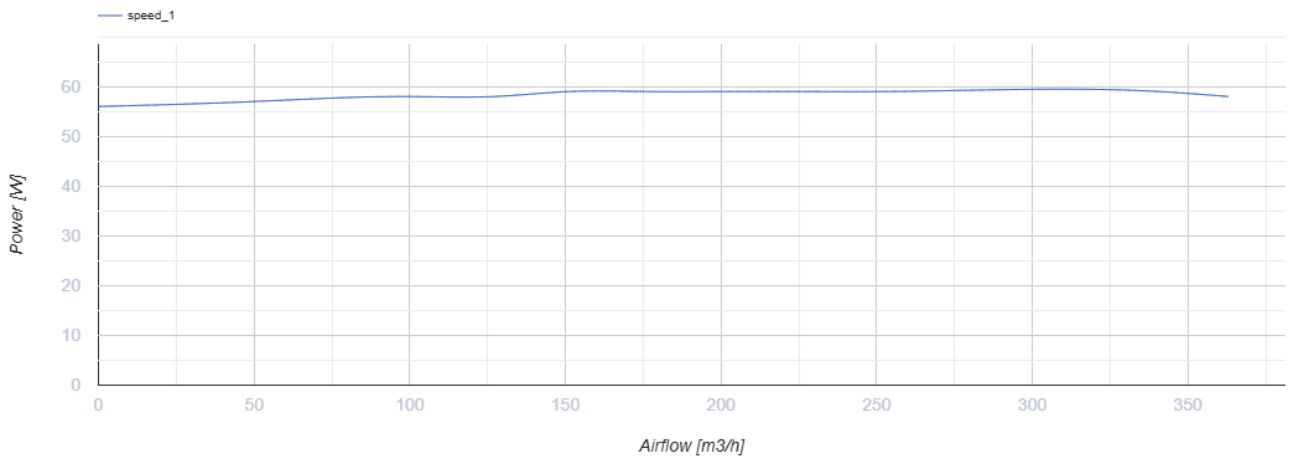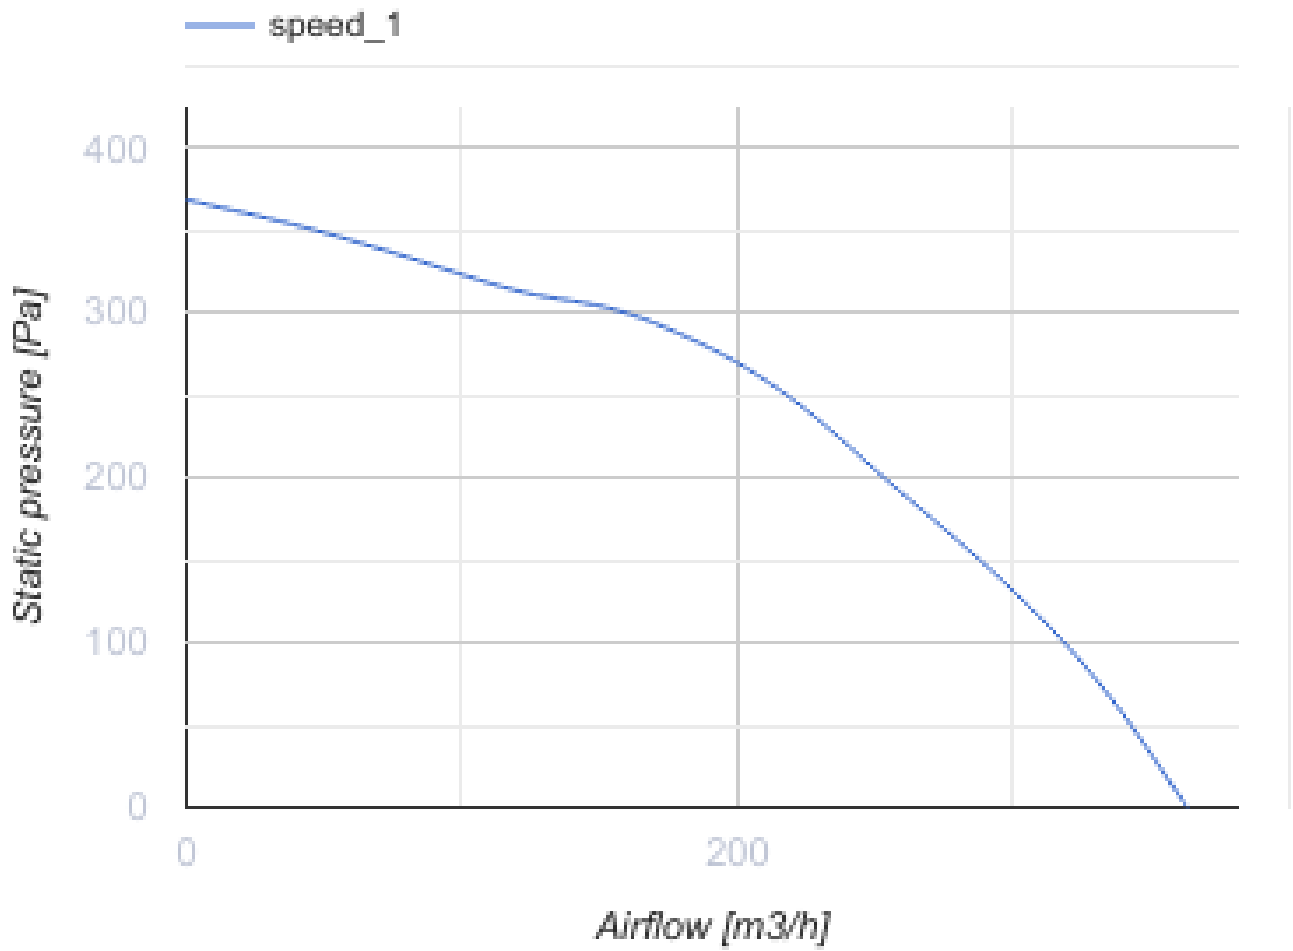


Dimensions

ØD	ØD1	B	H	L	L2
124	124	270	141	397	299

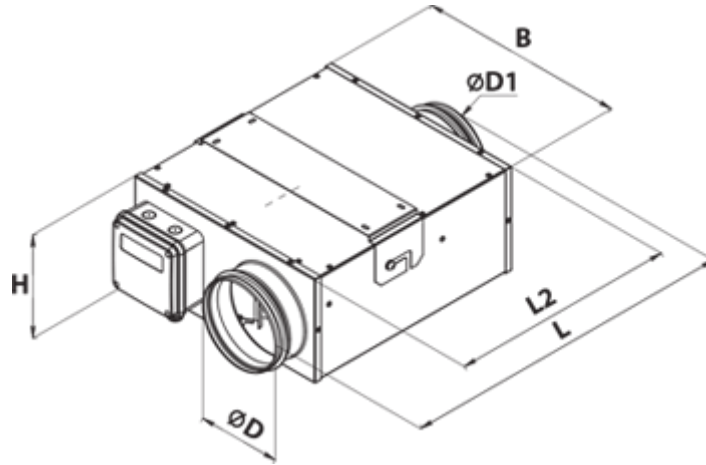

Ecodesign

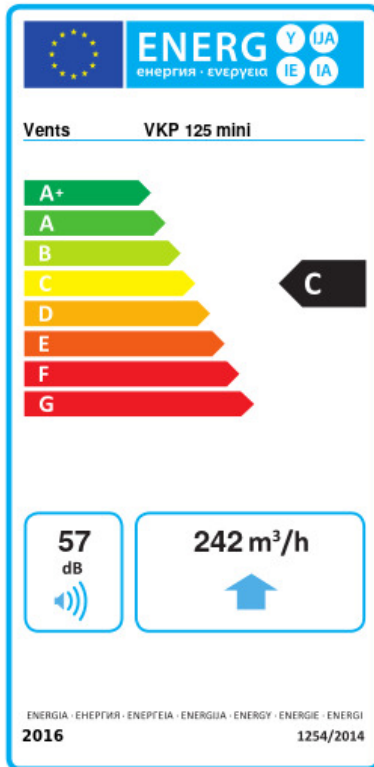

Trademark	Vents					
Model	VKP 125 mini					
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold		Average		Warm	
	-51.7	A+	-24.6	C	-9.1	F
Type of ventilation unit	Unidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	None					
Maximum flow rate (m ³ /h)	242					
Electric power input (W)	48.3					
Reference flow rate (m ³ /s)	0.047					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m ³ /h))	0.277					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Declared typology	RVU UVU					
Sound power level (dB(A))	57					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	147		147		147	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	5536		2830		1280	