

VKP 125


Centrifugal inline fans with backward curved blades

- Sound pressure level LpA at 3 m: 48
- Impeller type: Centrifugal impeller with backward curved blades
- Casing material: Coated steel
- Installation in any position

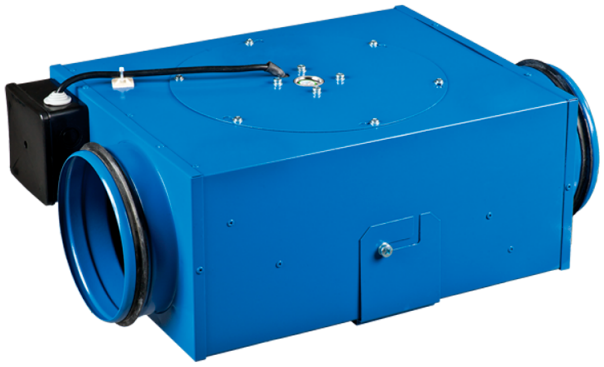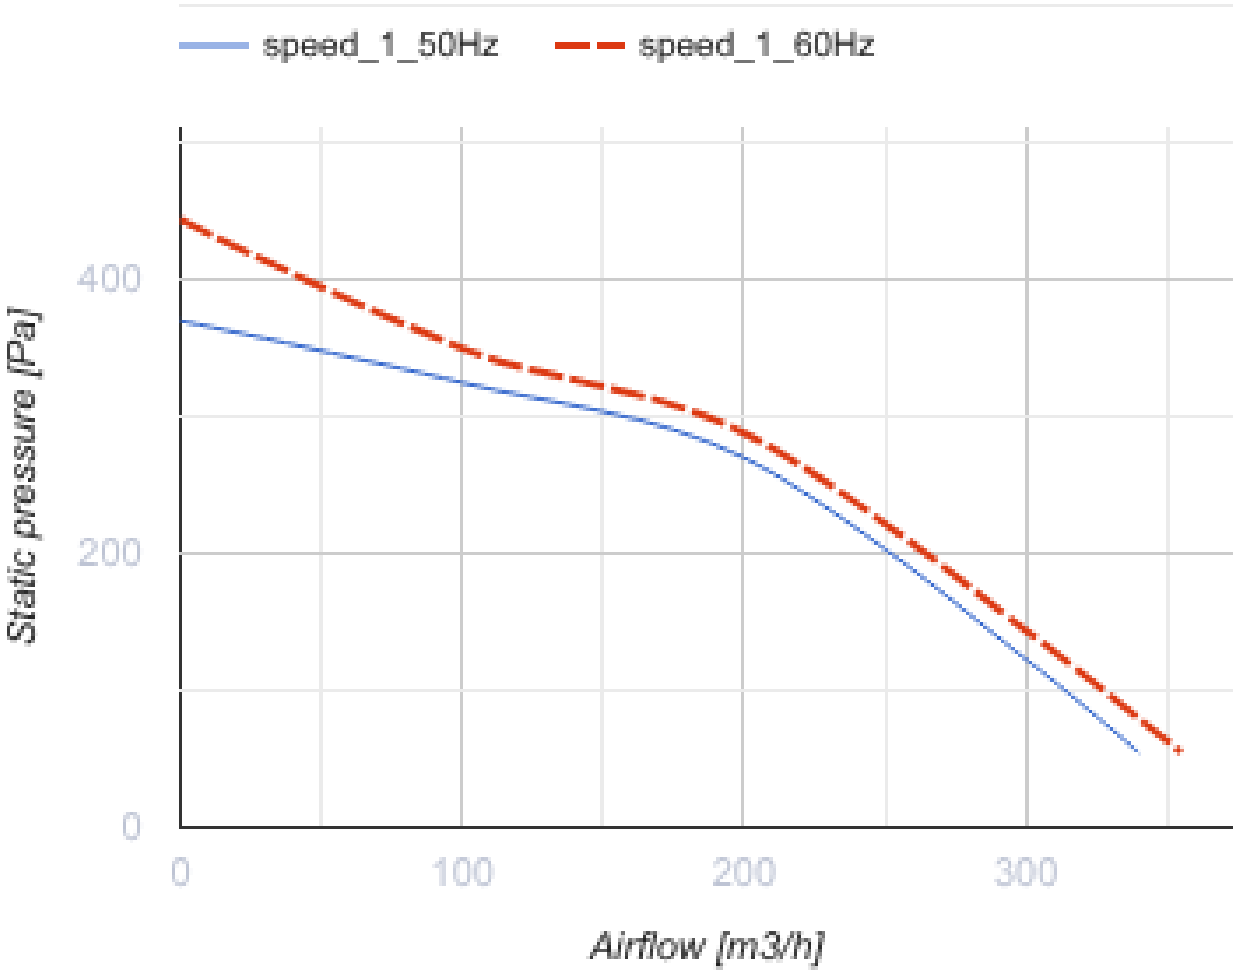


	Unit of measurement	VKP 125
Connected air duct size	mm	125
Phases	-	1
Maximum supply voltage	V	240
Minimum supply voltage	V	220
Power supply frequency	Hz	50/60
Rated power	W	58
Unit current	A	0.26
Maximum airflow	m^3/h	340
Rotation speed at 50hz	-	2500
Sound pressure level LpA at 3 m	dB(A)	48
Weight	kg	4.55
Transported air temperature (max)	°C	50
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44
Impeller material	-	Plastic


speed_1_50Hz
speed_1_60Hz
Static pressure [Pa]
400
200
0
0
100
200
300
Airflow [m3/h]

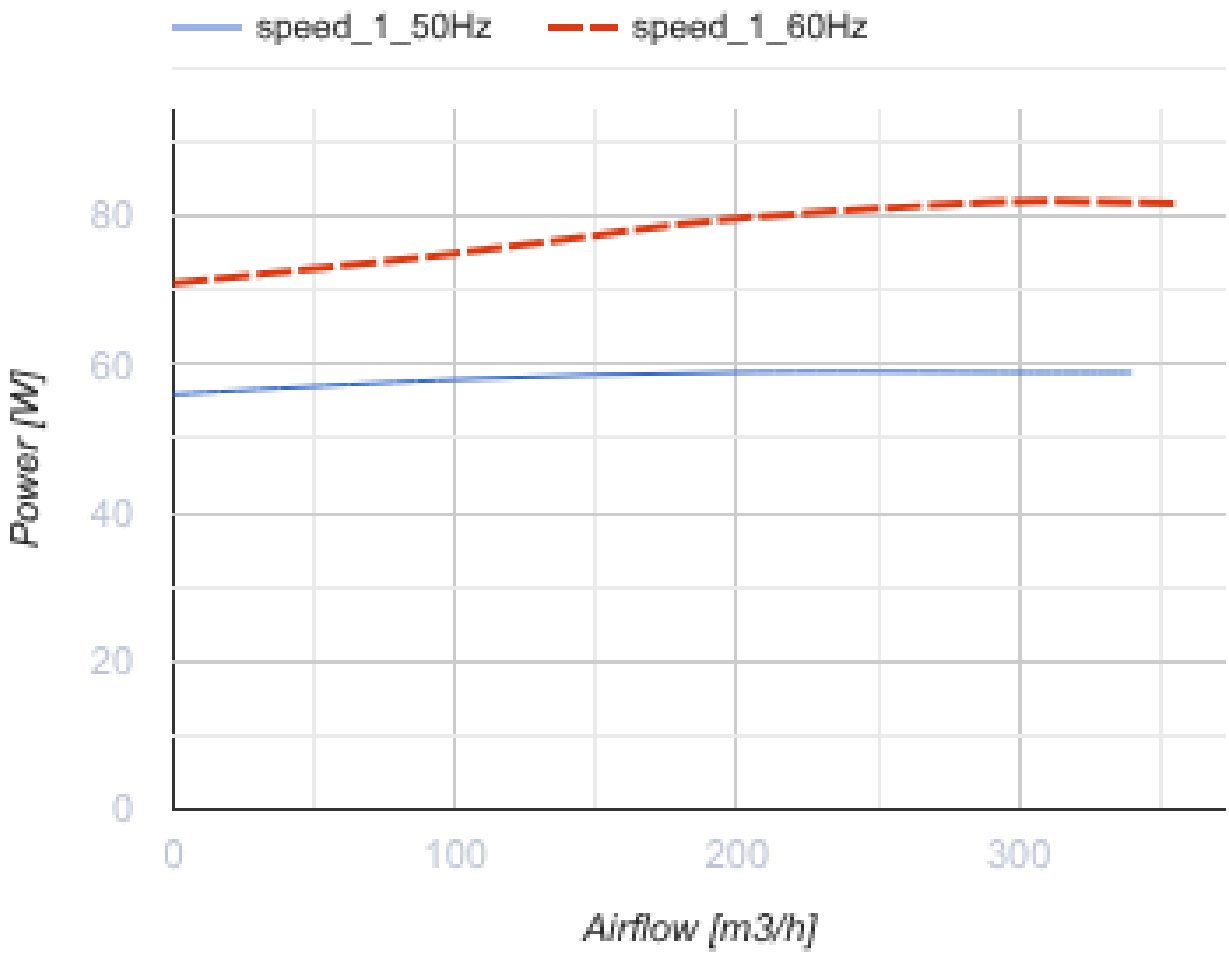


Dimensions

ØD	B	H	L	L2
124	252	133	420	321

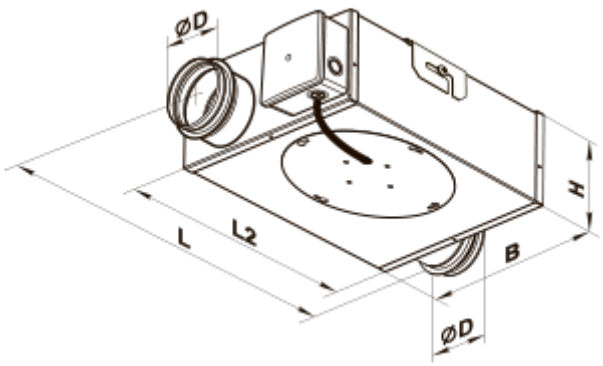

Ecodesign

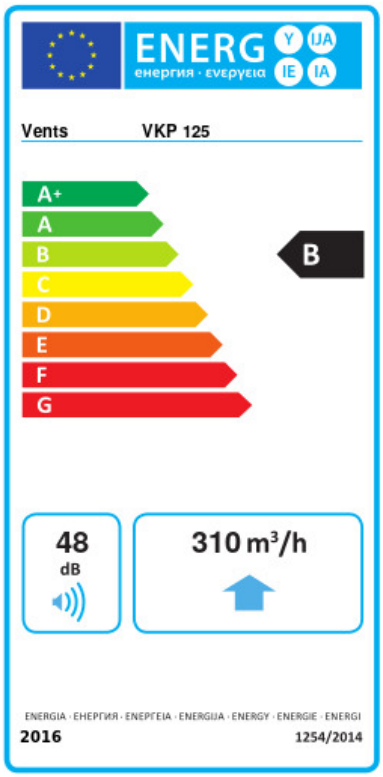

Trademark	Vents					
Model	VKP 125					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold		Average		Warm	
	-53.4	A+	-26.4	B	-10.9	E
Type of ventilation unit	Unidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	310					
Electric power input (W)	58					
Reference flow rate (m³/s)	0.06					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m³/h))	0.147					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Sound power level (dB(A))	48					
Declared typology	RVU UVU					
The annual electricity consumption (AEC) (kWh/a)	Cold		Average		Warm	
	78		78		78	
The annual heating saved (AHS) (kWh/a)	Cold		Average		Warm	
	5536		2830		1280	